



USA

# Supermarket LINE

· RETAIL CATALOG ·

20  
24



# Welcome to **INFRICO** FACTORY STORY!



INFRICO is a family-owned and operated manufacturer based in the Southern region of Spain. For nearly 35 years, we have been a major global market player in the production and sales of “HIGH SPEC” Commercial Refrigeration Equipment. Our North America headquarters are located in Miami, FL, and since 2011, our products have been distributed across the United States with incredible success.

Our product line is design-driven and ideal for various environments, including grocery, convenience stores, and supermarkets, luxury hotels & resorts, restaurants, entertainment parks,

casinos, schools, airports, sport stadiums. A significant factor contributing to our success is the strong relationships we cultivate with our customers, dealers, and consultants throughout the country. Their valuable input allows us to tailor our products for multiple high-level jobs. To ensure reliable service, we maintain a vast supply of locally stocked parts and have established a solid U.S. service network with access to top authorized service agents nationwide.

We have one of the best lead times in the industry, delivering equipment within 16





weeks. High mover items are stocked in Miami, FL, meeting the highest international quality standards. Our vast product range includes Supermarket cases, self-contained and remote units, Air Curtains, Grab n' Go cases, and more."

We are excited about the opportunity to serve you soon.

Infrico USA · North America Division






# TOTAL LOOK

## GLASS DOOR

Our Supermarket Line now features the new TOTAL LOOK design with fully clear doors, reducing energy consumption while providing full product visibility.

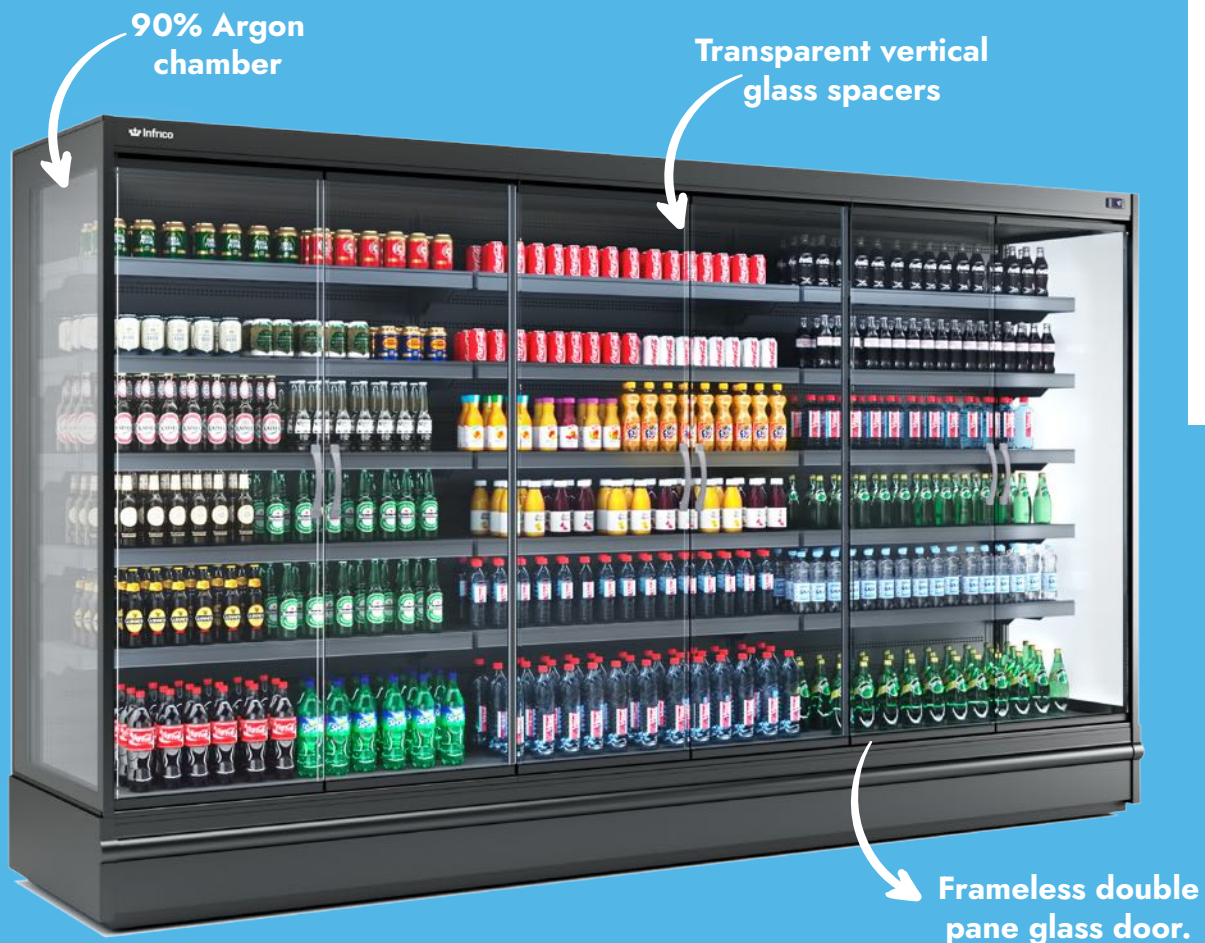





#### **ENERGY**

Designed to reduce energy consumption while ensuring proper interior product temperatures.



#### **DESIGN**

Elegant design



#### **VISIBILITY**

Frameless double pane glass door providing total product visibility.



#### **QUALITY**

Durability and safety



#### **GLASS DOOR**

Frameless double pane glass door.



## MAIN FEATURES

- Fully integrated into display case
- Frameless modular hinged door
- Concealed hinges and hardware elements
- Easy installation and interchangeable with standard door
- Low emissivity, tempered glass (UNI 12150 compliant)
- 90% argon chamber
- External tempered glass
- Ergonomic aluminum handle

## TECHNICAL SPECIFICATIONS NEW DESIGN

- Conductivity coefficient  $U_g=1,2 \text{ W/ m}^2\text{K}$
- Color rendering coefficient RD65 / 98%Ra
- Transmission coefficient 81 % Tv
- Reflection coefficient 15 % pv

## HYDRAULIC HINGE

- Guaranteed openings > 1.000.000 cycles without maintenance
- Automatic door closing at  $0^\circ$  to  $80/85^\circ$
- Guarantee automatic closing
- Smooth and light opening
- Full door opening of up to  $93^\circ$ , making it easy for product replenishment.

## ERGONOMIC HANDLE

- Made of heavy-duty aluminum (up to 220 Lb)
- Length: 9.5"
- Rounded angles for safety
- PVC covers for added comfort
- Coated with strong ultraviolet adhesive
- Light gray handle and gasket



# EXPERIENCE

## PRICE TAG HOLDERS



Infrico Supermarket introduces a newly patented price tag holder system, seamlessly integrating LED lighting for a visually appealing display. This innovative system combines the functionality of holding and displaying prices with built-in LED lighting, eliminating the need for auxiliary elements.

### Key Features:

Easy attachment and replacement of price tag labels from underside.

LED lighting placed strategically to illuminate product on bottom shelf effectively.

Elimination of LED lighting from the front view, ensuring products are highlighted from the promotional side.

Increased effectiveness with low energy consumption and high efficiency, making it a sustainable solution.

# LED LIGHTING SYSTEM

Our choice to integrate LED lighting systems brings forth a multitude of benefits. From low heat emission to minimized energy consumption and high light output, these systems are a compelling solution for showcasing your products with brilliance and efficiency.

At Infrico Supermarket, we understand that each display case demands a unique approach. That's why we offer a wide range of LED lighting systems, perfectly tailored to suit diverse display case types and locations.

With our expertise in lighting solutions, you can rest assured that your products will radiate with appeal, capturing the attention of customers and elevating your sales experience to new heights.





We'll learn about the  
**IMPORTANCE**  
of different lighting characteristics  
to select the most suitable LED  
**system for you.**



WE MAKE  
**SHOPPING**  
*easier*



# 1.SELECTION

The careful selection of the right lighting product is essential to achieve optimal visibility results for product display in line with their unique characteristics as described below...

- Correlated color temperature (CCT)
- Color rendering index (CRI)
- Protection degree (IP)
- Light output (W/m)
- Luminous efficiency
- Optics type

Not all LEDs are equal, and their color rendering capabilities can vary significantly. At Infrico Supermarket, we thoroughly assess the technical requirements of each situation and carefully select the most suitable light source for every location.

This ensures that the chosen LED lighting solution perfectly highlights the colors and enhances the overall presentation of the displayed products. LEDs play a crucial role, and their configuration varies based on their location within the display case and the required light distribution. We will discuss LEDs with 170° aperture optics for vertical lighting and 90° for horizontal lighting, ensuring the perfect illumination for each setting.

*At Infrico Supermarket, we ensure the perfect match for each type of commercial refrigeration display case, taking into account its location and intended use. You have the flexibility to choose from various available options, including lighting type and intensity, to meet your specific requirements. Our goal is to provide you with the ideal lighting solution that enhances the appeal and visibility of your products.*





## COLOR TEMPERATURE

You must always choose the appropriate color temperature for each use and select it based on the displayed product. While this can vary, here is a small basic selection guide to assist you:



WHITE  
**4000K**

The most common color temperature used in food display is generally for products such as dairy products, fruit and vegetables, ready meals, and packaged fish.



WARM WHITE  
**3000K**

This color temperature extends its use to include bakeries, cheese, and hot products.



MEAT  
**COLOR**

The color temperature for meat display does not have a fixed value and primarily emphasizes the reds and whites of the meat.



COOL WHITE  
**6000K**


This color is normally used for frozen products.

So in refrigeration, you have the option to choose between white 4000K, warm white 3000K, and meat color depending on your specific needs and the type of product to be displayed. For freezing, the color is consistently cool white 6000K.




## 2. LIGHTING SELECTION

In this context, we are not addressing regulations, but rather focusing on light perception. A moderate light intensity contributes to product preservation, while a higher light intensity enhances product visibility.

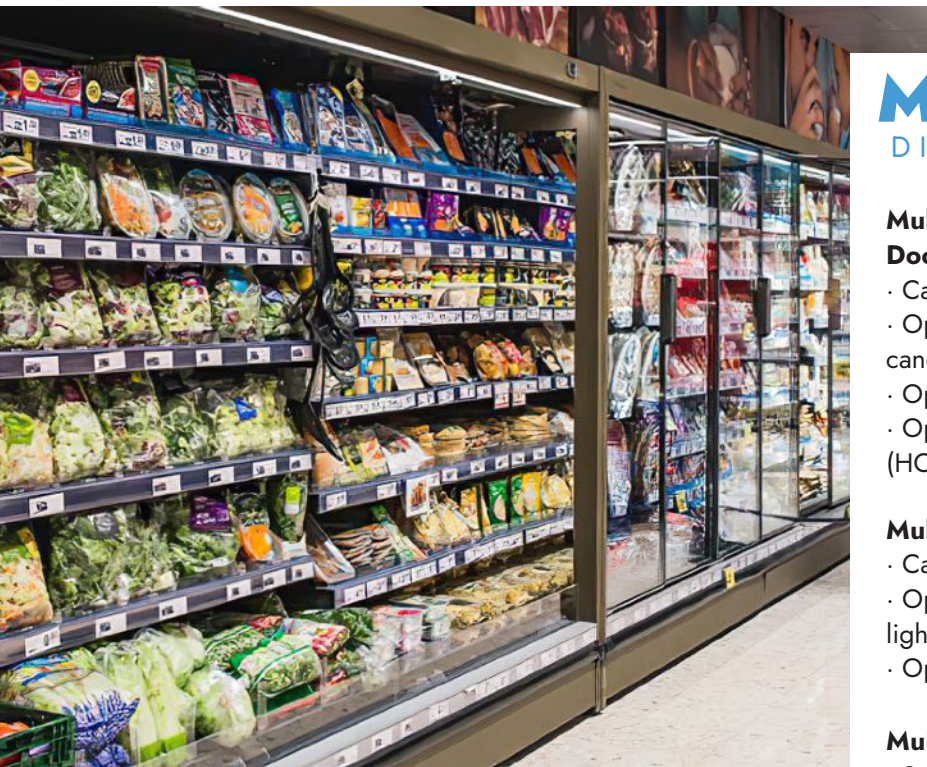

### MULTIDECK DISPLAY CASES



#### **Multi-Deck, Refrigerated, Self-Service Display with Doors**

- Canopy lighting (standard)
- Optional double canopy lighting and premium canopy lighting (HO)
- Optional shelf lighting
- Optional vertical lighting and premium vertical lighting (HO)

#### **Multi-Deck, Refrigerated, Self-Service Display.**

- Canopy lighting (standard)
- Optional double canopy lighting and premium canopy lighting (HO)
- Optional shelf lighting

#### **Multi-Deck, Freezer, Self-Service Display with Doors**

- Standard vertical lighting
- Optional premium vertical lighting (HO)



### DISPLAY CASES



#### **VEX Experience display case**

- Standard double exposition lighting meat color

#### **VBC Barcelona & VMD Madrid Display case**

- Standard exposition lighting meat color
- Standard double shelf lighting meat color





## ISLANDS



### Panoramic freezer islands

- Standard handrail lighting cool white 6000K
- Optional double exposition lighting cool white 6000K





# 3. UNIFORMITY

is key in the visual sensation perceived by the human eye. Therefore, we should always choose, whenever possible, the configuration that allows us to achieve this distribution uniformly.

## VERTICAL LIGHTING

The distance from the light source to the highlighted product on vertical cabinets is crucial to ensure even lighting distribution by the optics.

When dealing with vertical cabinets featuring doors and opting for vertical door lighting, maintaining a linear distance of  $>6.6''$  between the LED and the showcased product is of utmost importance.

This measurement determines the optimal shelf placement within the cabinet, ensuring the desired lighting perspective.

LED PRODUCT DISTANCE (mm)		
MODEL	SHELF	L


**MLGD**

LED PRODUCT DISTANCE (mm) MODEL		
MODEL	SHELF	L


**MNDG**

LED PRODUCT DISTANCE (mm) MODEL		
MODEL	SHELF	L

**MXDG**

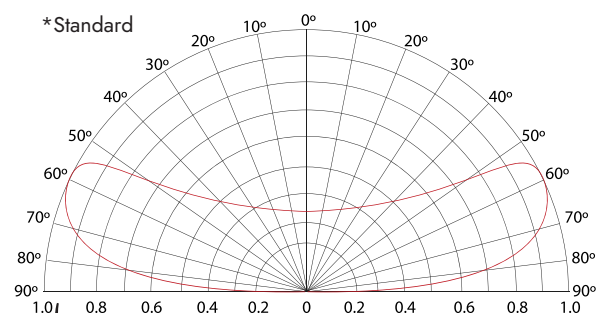

LED distance vertical display cases

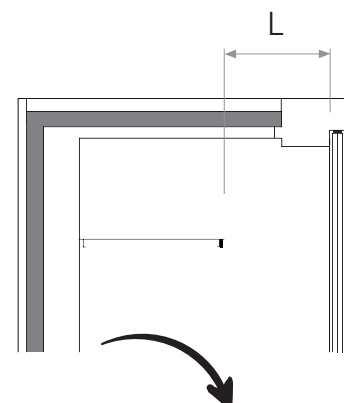


LED module light distribution graph



# SLIDING DOORS

## WITH FRAME

Energy efficiency.  
Rear sliding doors with frame reducing energy consumption & condensation, preventing entry of flying insects and keeping the product safe for longer.

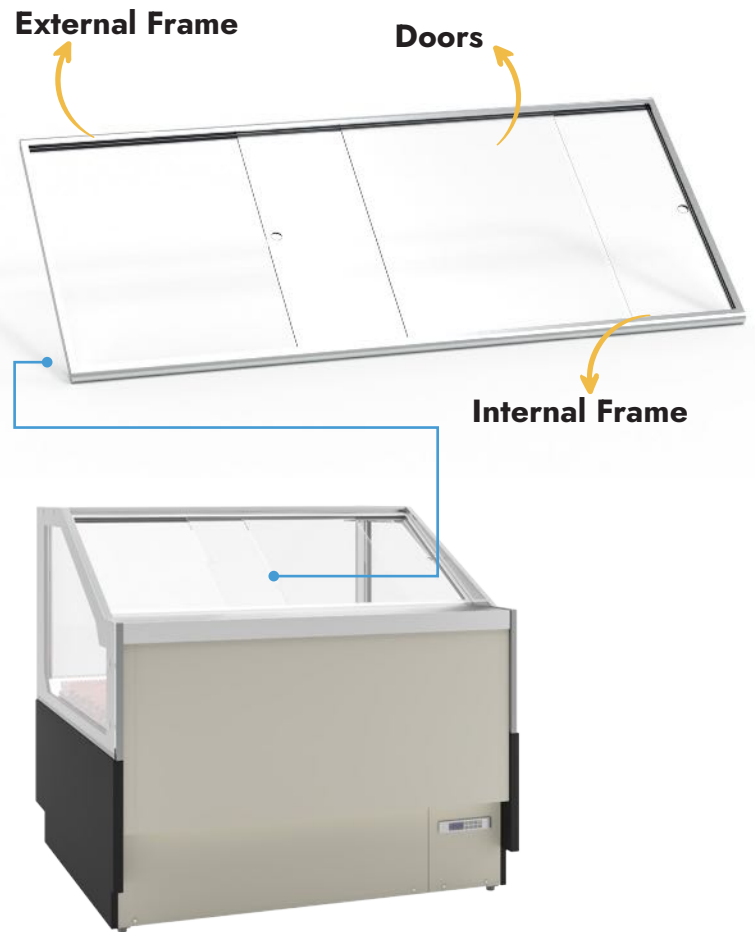







# ANTI-FOG SYSTEM

## INFRICO SUPERMARKET'S CONDENSATION MANAGEMENT SOLUTIONS: ELEVATING EXCELLENCE IN COMMERCIAL REFRIGERATION

Condensation on glass surfaces of commercial refrigeration units can pose an inconvenience for supermarket customers. This moisture can limit the visibility of displayed products, negatively impacting the shopping experience.

In contrast, the absence of condensation ensures clear visibility of displayed products for shoppers, by eliminating the disruptions caused by condensation and ensuring product visibility. Infrico Supermarket's commercial refrigeration units provide customers with a more seamless shopping experience.

Designed to perform optimally in maximum ambient working conditions of 77°F and 60% relative humidity, Infrico Supermarket's commercial refrigeration units adhere to the ISO23953 standard. This standard outlines the necessary conditions for the construction,

features, and operation of commercial refrigeration units used for the sale and display of food items.

Where there is uncertainty that these requirements can be met – such as in establishments near coastal areas where humidity levels and temperatures may surpass ISO23953's limits—Infrico Supermarket offers solutions that delay the occurrence of condensation, enhancing the shopping experience in supermarkets. These options have been integrated into Infrico Supermarket's lineup for customers' consideration.

These are the available optional condensation control systems for Infrico Supermarket's commercial refrigeration units:

- **MDG, MDC Experience Multidecks with doors**
- SCC Low energy consumption system without resistance
- **VBR Pastry display Ambar Series**
- Thermopane double glass for curved glass models
- Heated glass for flat glass models
- **VEU Europa Supermarket Display counter**
- Heated glass
- **VEUCP Europa Supermarket flat glass display case**
- SCC Low energy consumption system without resistance (this option eliminates the possibility of decorative lighting)

- **VBC Barcelona Supermarket Display case**

- Heated glass

- **VBCCP Barcelona Supermarket flat glass display case**

- SCC Low energy consumption system without resistance (this option eliminates the possibility of decorative lighting)

In addition, two models come with this system as standard:

- **VEX Experience Supermarket display case**

- SCC Low energy consumption system without





# MULTIDECK DISPLAY CASE



## PORTLAND SERIES

MDG

Remote refrigeration  
doors multidecks

Pg.20



## DETROIT SERIES

MDGU

Self contained refrigeration  
doors multidecks

Pg.26



## OSLO SERIES

MPB

Remote refrigeration  
open low front multidecks

Pg.30



## TORONTO SERIES

MBT

Remote freezer full  
glass doors multidecks

Pg.36



## ROTTERDAM SERIES

MDCP

Plug in R-290 refrigeration  
doors multidecks

Pg.40



## MUNICH SERIES

MP

Plug in R-290 refrigeration  
open multidecks

Pg.40

# PORTLAND

MDG · Remote refrigeration doors multidecks



## EXCELLENCE IN THE SHOPPING EXPERIENCE

Self-closing oleo dynamic hinges.  
Wide range of options, end panels and customization possibilities.



## WIDE PRODUCT DIMENSIONAL RANGE TO PROVIDE FULL CAPACITY

34 27/32 and 42 23/32 wide, 49 1/5 to 147 2/3 long and 80 5/7 and 86 3/5 (in) high.



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

High transparency double glass doors without screen printing  
High efficiency LED lighting.



## PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS









# PORTLAND SERIES


Remote refrigeration doors multidecks

MDG · MXDG

REMOTE



FOR



## AVAILABLE MODELS

MX12DGM1

MX18DGM1

MX25DGM1

MX31DGM1

MX37DGM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	MX12DGM1	MX18DGM1	MX25DGM1	MX31DGM1	MX37DGM1
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	41 1/6	61 3/4	82 2/5	103	123 4/7
TDA (ft²)	20 1/4	30 1/2	40 5/8	51 6/7	62

## GENERAL DATA

MEASURE (in)	42 23/32 x 80 11/16 x **L (in)
SHELVES (in)	24 9/16
N° SHELVES	5
EXPOSITION DECK (in) (in)	31 11/16
SIDE PANEL THICKNESS (in)	1 4/7

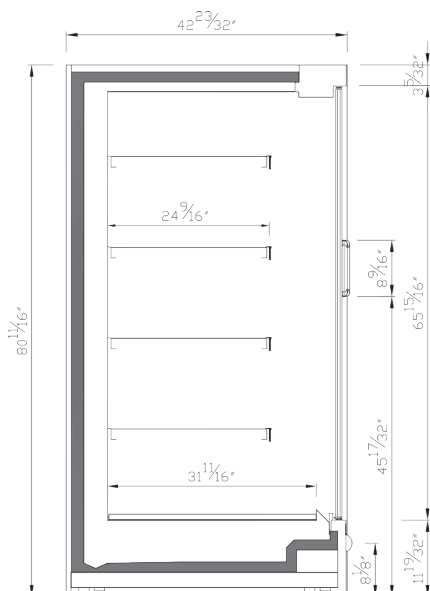

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System




# PORTLAND SERIES

Remote refrigeration doors multidecks  
MDG · MXDG22



REMOTE



FOR



## AVAILABLE MODELS

MX12DG22M1	MX18DG22M1	MX18DG22M1
MX31DG22M1	MX37DG22M1	

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz  
**REFRIGERANT CONNECTION:** Freon, CO2  
**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA


MODEL	MX12DG22M1	MX18DG22M1	MX18DG22M1	MX31DG22M1	MX37DG22M1
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	33 3/5	50 2/5	67 1/5	84	100 4/5
TDA (ft²)	22	37 7/8	43 5/6	56	66 8/9

## GENERAL DATA

MEASURE (in)	42 23/32 x 86 19/32 x **L (in)
SHELVES (in)	24 9/16
N° SHELVES	5
EXPOSITION DECK (in)	31 11/16
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

- Exterior:**
- Full size double panel glass doors that prevent heat transmission
  - Epoxy painted steel sheet
  - Double panel glass sides
- Interior:**
- AISI 304 Stainless Steel.
  - Stainless Steel internal panel perforated.
  - Height and incline adjustable stainless steel shelves
- Insulation:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Electrical and electronic controllers:**
- Remote alarm signals.
  - Encapsulated and sealed NTC temperature probes.
  - Effective way to visualize temperature.
- Refrigeration:**
- Digital temperature controller with automatic defrost system.

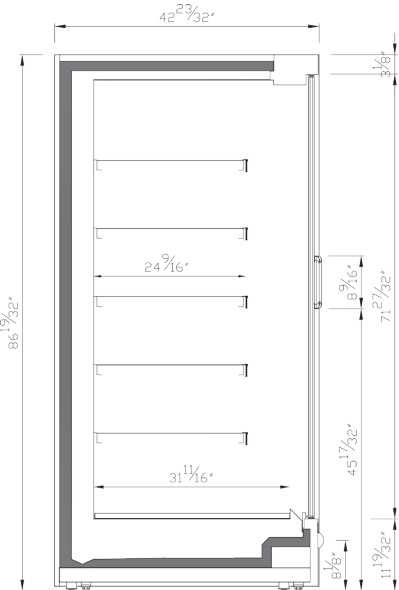

COMMERCIAL SECTION

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System


# PORTLAND SERIES

Remote refrigeration doors multidecks

MDG · MLDG



REMOTE



FOR



## AVAILABLE MODELS

ML12DGM1

ML18DGM1

ML25DGM1

ML31DGM1

ML37DGM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	ML12DGM1	ML18DGM1	ML25DGM1	ML31DGM1	ML37DGM1
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	28 1/3	42 1/2	56 2/3	70 5/6	85
TDA (ft²)	21 1/4	31 6/7	42 1/2	53	63 5/7

## GENERAL DATA

MEASURE (in)	34 27/32 x 80 11/16 x **L (in)
SHELVES (in)	20 5/8
N° SHELVES	4
EXPOSITION DECK (in)	23 13/16
SIDE PANEL THICKNESS (in)	1 4/7

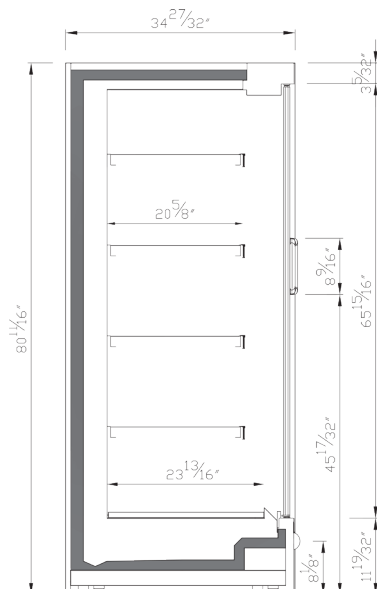

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.


## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System



# PORTLAND SERIES

Remote refrigeration doors multidecks  
MDG · MLDG22




AVAILABLE MODELS		
ML12DG22M1	ML18DG22M1	ML25DG22M1
ML31DG22M1	ML37DG22M1	

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz  
**REFRIGERANT CONNECTION:** Freon, CO2  
**PRODUCT TEMP:** 33°F / 41°F

GENERAL DATA					
MODEL	ML12DG22M1	ML18DG22M1	ML25DG22M1	ML31DG22M1	ML37DG22M1
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	30	45	60	75	90
TDA (ft²)	24	36	48	60 1/9	72 1/8

GENERAL DATA	
MEASURE (in)	34 27/32 x 86 19/32 x **L (in)
SHELVES (in)	20 5/8
N° SHELVES	5
EXPOSITION DECK (in)	23 13/16
SIDE PANEL THICKNESS (in)	1 4/7

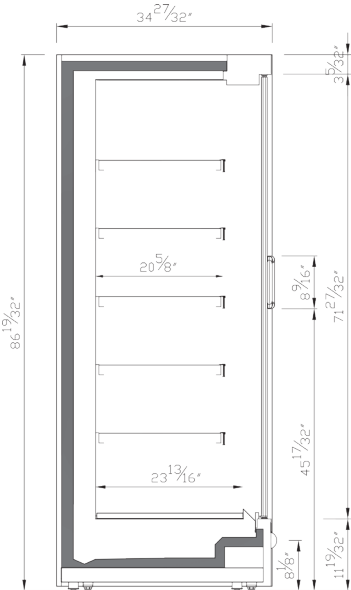

COMMERCIAL SECTION

- | STANDAR FEATURES  |
|---|
| <b>Exterior:</b> <ul style="list-style-type: none"><li>· Full size double panel glass doors that prevent heat transmission</li><li>· Epoxy painted steel sheet</li><li>· Double panel glass sides</li></ul>                       |
| <b>Interior:</b> <ul style="list-style-type: none"><li>· AISI 304 Stainless Steel.</li><li>· Stainless Steel internal panel perforated.</li><li>· Height and incline adjustable stainless steel shelves</li></ul>                 |
| <b>Insulation:</b> <ul style="list-style-type: none"><li>· CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.</li></ul>                                  |
| <b>Electrical and electronic controllers:</b> <ul style="list-style-type: none"><li>· Remote alarm signals.</li><li>· Encapsulated and sealed NTC temperature probes.</li><li>· Effective way to visualize temperature.</li></ul> |
| <b>Refrigeration:</b> <ul style="list-style-type: none"><li>· Digital temperature controller with automatic defrost system.</li></ul>   |

- | OPTIONAL EQUIPMENT        |
|---------------------------|
| LED Vertical Light        |
| LED Shelf Lighting        |
| Condensing Control System |

# DETROIT

**MDGU** · Self contained refrigeration doors  
multidecks



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Self-closing oleo dynamic hinges.  
Wide range of options, end panels and customization possibilities.



## **WIDE PRODUCT DIMENSIONAL RANGE TO PROVIDE FULL CAPACITY**

34 1/2 wide, 49 1/5 to 147 2/3 length and 80 5/7 and 86 3/5 (in) high (94 1/2 and 100 2/5 including the unit).



## **FULL VISIBILITY OF THE DISPLAY PRODUCTS**

High transparency double glass doors without screen printing High efficiency LED lighting.



## **PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS**

Remote display multideck with top unit for temperature range.










## DETROIT SERIES

Self contained refrigeration doors multidecks  
MDGU · MLDGU

SELF CONTAINED



FOR



### AVAILABLE MODELS

ML12DGUM1

ML18DGUM1

ML25DGUM1

ML37DGUM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon


**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	ML12DGUM1	ML18DGUM1	ML25DGUM1	ML37DGUM1
LENGTH (in)	49 1/5	73 5/6	98 3/7	147 2/3
TOTAL VOLUME (ft³)	28 1/3	19 1/2	29 1/5	87 4/7
TDA (ft²)	23 3/4	35 5/8	46 3/5	71 1/4

### GENERAL DATA

MEASURE (in)	34 1/2 x 90 9/32 x **L (in)
SHELVES (in)	15 7/8
N° SHELVES	4
EXPOSITION DECK (in)	23 9/16
SIDE PANEL THICKNESS (in)	1 4/7

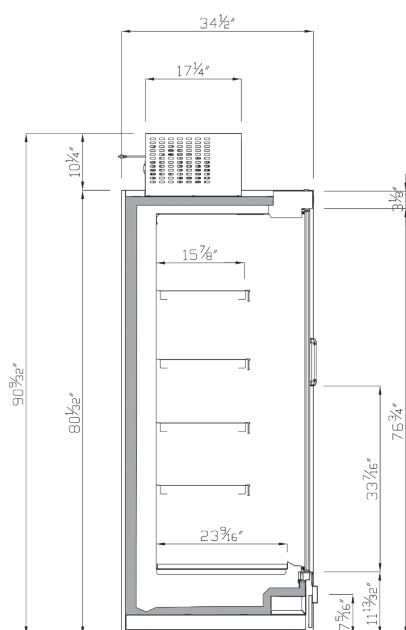

COMMERCIAL SECTION

### STANDAR FEATURES

#### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

### OPTIONAL EQUIPMENT

- Vertical Light
- LED Shelf Lighting
- SCC "Condensation Control System"




## DETROIT SERIES

Self contained refrigeration doors multidecks

MDGU · MLDGU22



SELF CONTAINED



FOR



### AVAILABLE MODELS

ML12DGU22M1 ML18DGU22M1 ML25DGU22M1  
ML37DGU22M1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon

**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	ML12DGU22M1	ML18DGU22M1	ML25DGU22M1	ML37DGU22M1
LENGTH (in)	49 1/5	73 5/6	98 3/7	147 2/3
TOTAL VOLUME (ft³)	37	55 2/5	73 7/8	110 4/5
TDA (ft²)	25 8/9	38 6/7	51 4/5	77 2/3

### GENERAL DATA

MEASURE (in)	34 1/2 x 96 5/8 x **L (in)
SHELVES (in)	15 17/32
N° SHELVES	5
EXPOSITION DECK (in)	23 9/16
SIDE PANEL THICKNESS (in)	1 4/7

### STANDAR FEATURES

#### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

### OPTIONAL EQUIPMENT

- Vertical Light
- LED Shelf Lighting
- SCC "Condensation Control System"

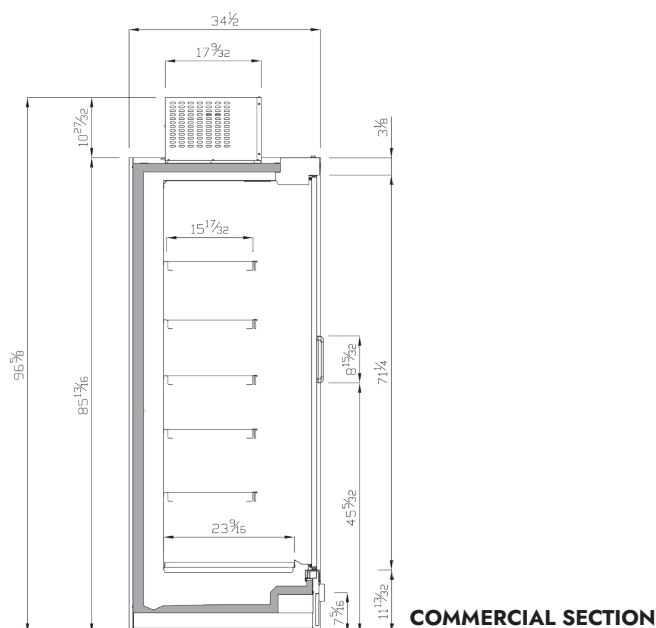

# OSLO

**MPB** · Remote refrigeration open low front multidecks



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Adjustable and tilting shelves optimized for each width to optimize loading capacity without repositioning Wide range of options, end panels and customization possibilities.



## **WIDE PRODUCT DIMENSIONAL RANGE TO PROVIDE FULL CAPACITY**

34 27/32 and 42 23/32 wide, 49 1/5 to 147 2/3 long and 80 5/7 and 86 3/5 (in) high.



## **FULL VISIBILITY OF THE DISPLAY PRODUCTS**

Low front with display High efficiency LED lighting.



## **PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS.**









# OSLO SERIES


Remote refrigeration open low front multidecks

MPB · MXPB

REMOTE



FOR



## AVAILABLE MODELS

MX12PBM2

MX18PBM2

MX25PBM2

MX31PBM2

MX37PBM2

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	MX12PBM2	MX18PBM2	MX25PBM2	MX31PBM2	MX37PBM2
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	28 2/7	42 4/9	56 3/5	70 3/4	84 8/9
TDA (ft²)	26 1/3	39 1/2	52 2/3	65 6/7	79

## GENERAL DATA

MEASURE (in)	42 23/32 x 80 11/16 x **L (in)
SHELVES (in)	24 9/16
N° SHELVES	4
EXPOSITION DECK (in)	31 11/16
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System

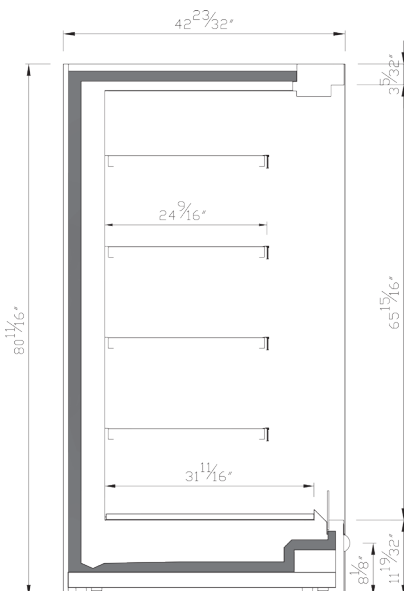

COMMERCIAL SECTION




# OSLO SERIES

Remote refrigeration open low front multidecks

MPB · MXPB22



REMOTE



FOR



## AVAILABLE MODELS

MX12PB22M2

MX18PB22M2

MX25PB22M2

MX31PB22M2

MX37PB22M2

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	MX12PB22M2	MX18PB22M2	MX25PB22M2	MX31PB22M2	MX37PB22M2
LENGTH (in)	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	33 3/5	50 2/5	67 1/5	84	100 4/5
TDA (ft²)	28 1/3	42 5/9	56 5/7	71	85

## GENERAL DATA

MEASURE (in)	42 23/32 x 86 19/32 x **L (in)
SHELVES (in)	24 9/16
N° SHELVES	5
EXPOSITION DECK (in)	31 11/16
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System

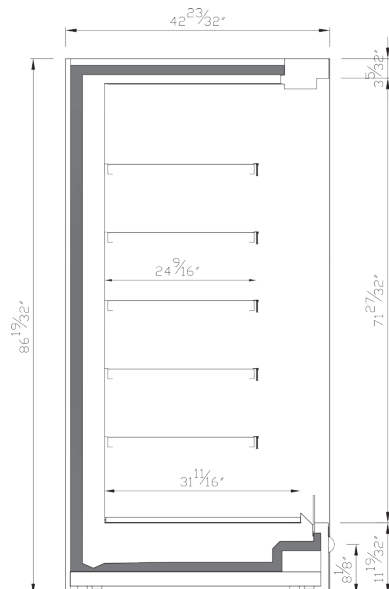

COMMERCIAL SECTION

# OSLO SERIES


Remote refrigeration open low front multidecks

MPB · MLPB

REMOTE



FOR



## AVAILABLE MODELS

ML09PBM1

ML12PBM1

ML18PBM1

ML25PBM1

ML31PBM1

ML37PBM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	ML09PBM1	ML12PBM1	ML18PBM1	ML25PBM1	ML31PBM1	ML37PBM1
LENGTH (in)	37	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	14 3/5	19 1/2	29 1/6	39	48 2/3	58 2/5
TDA (ft²)	18 2/7	24 1/3	36 1/2	48 5/7	61	73

## GENERAL DATA

MEASURE (in)	34 27/32 x 80 11/16 x **L (in)
SHELVES (in)	20 7/32
N° SHELVES	4
EXPOSITION DECK (in)	23 9/16
SIDE PANEL THICKNESS (in)	1 4/7

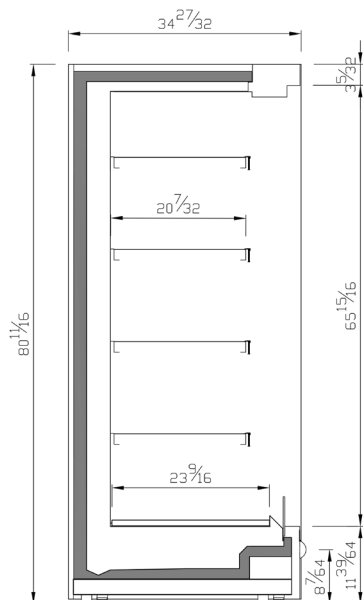

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System




# OSLO SERIES

Remote refrigeration open low front multidecks

MPB · MLPB22



REMOTE



FOR



## AVAILABLE MODELS

ML09PB22M1

ML12PB22M1

ML18PB22M1

ML25PB22M1

ML31PB22M1

ML37PB22M1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	ML09PB22M1	ML12PB22M1	ML18PB22M1	ML25PB22M1	ML31PB22M1	ML37PB22M1
LENGTH (in)	37	49 1/5	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	14 3/5	19 1/2	29 1/6	39	48 2/3	58 2/5
TDA (ft²)	19 4/5	26 3/8	39 4/7	52 3/4	66	79 1/7

## GENERAL DATA

MEASURE (in)	34 27/32 x 86 19/32 x **L (in)
SHELVES (in)	20 5/8
N° SHELVES	5
EXPOSITION DECK (in)	23 13/16
SIDE PANEL THICKNESS (in)	1 4/7

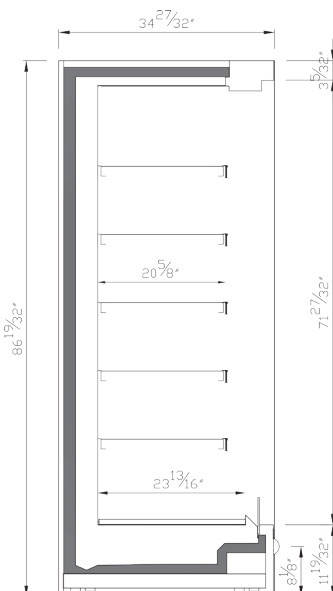

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

# TORONTO

**MBT** · Remote freezer full glass doors multidecks



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Wide range of options, end panels and customization possibilities Experience aesthetic line engamables with open and closed refrigeration multiodeck display cases.



## **WIDE PRODUCT DIMENSIONAL RANGE TO PROVIDE FULL CAPACITY**

38 11/16 and 37 2/5 wide, 61 4/7, 92 1/4, 123 and 153 3/4 length, 80 5/7 and 86 3/5 (in) high.



## **FULL VISIBILITY OF THE DISPLAY PRODUCTS**

Frameless full glass effect triple glass doors High-efficiency vertical LED lighting in doors.



## **PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS**








# TORONTO SERIES

Remote freezer full glass doors multidecks

MBT · MFBT



REMOTE



FOR



## AVAILABLE MODELS

MF2PBT1

MF3PBT1

MF4PBT1

MF5PBT1

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 0°F / 5°F

## GENERAL DATA

MODEL	MF2PBT1	MF3PBT1	MF4PBT1	MF5PBT1
LENGTH (in)	61 4/7	92 1/4	123	153 3/4
TOTAL VOLUME (ft³)	43 1/2	65 1/6	86 7/8	108 3/5
TDA (ft²)	16 4/9	24 2/3	32 6/7	41

## GENERAL DATA

MEASURE (in)	38 11/16 x 80 5/8 x **L (in)
SHELVES (in)	23 31/32
N° SHELVES	4
EXPOSITION DECK (in)	25 1/32
SIDE PANEL THICKNESS (in)	2 1/3

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.

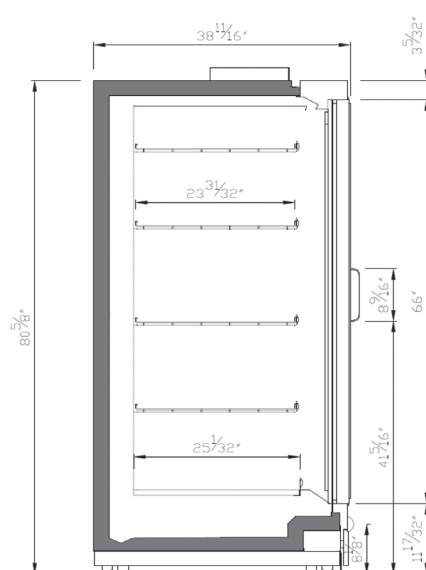

COMMERCIAL SECTION




# TORONTO SERIES

Remote freezer full glass doors multidecks

MBT · MFBT22



REMOTE



FOR



## AVAILABLE MODELS

MF2PBT22L1

MF3PBT22L1

MF4PBT22L1

MF5PBT22L1

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 0°F / 5°F

## GENERAL DATA

MODEL	MF2PBT22L1	MF3PBT22L1	MF4PBT22L1	MF5PBT22L1
LENGTH (in)	61 4/7	92 1/4	123	153 3/4
TOTAL VOLUME (ft³)	51 7/9	77 3/5	103 3/7	129 2/7
TDA (ft²)	18 1/5	27 1/4	36 1/3	45 2/5

## GENERAL DATA

MEASURE (in)	38 11/16 x 86 5/16 x **L (in)
SHELVES (in)	23 13/16
N° SHELVES	4
EXPOSITION DECK (in)	25
SIDE PANEL THICKNESS (in)	2 1/3

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.

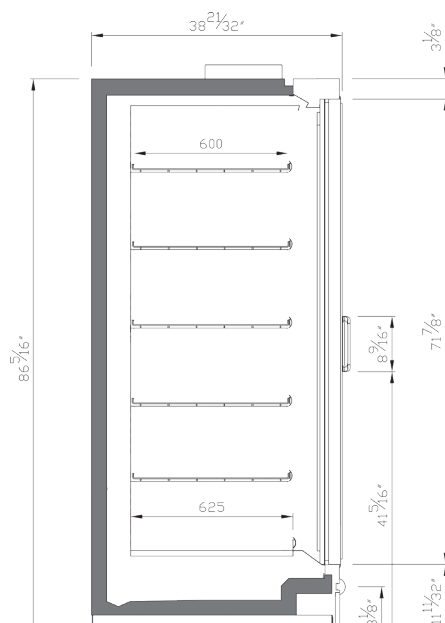

COMMERCIAL SECTION

# ROTTERDAM

**MDCP** · Plug in R290 refrigeration doors multidecks

# MUNICH

**MP** · Plug in R290 refrigeration opens low front multidecks



## EXCELLENCE IN THE SHOPPING EXPERIENCE

Wide range of options, end panels and customization possibilities.



## WIDE PRODUCT DIMENSIONAL RANGE TO PROVIDE FULL CAPACITY

34 27/32 wide, 25 3/5 to 98 3/7 long and 78 3/4 high.



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

High efficiency LED lighting.



## Plug in MULTIDECKS R290

Layout flexibility: WHERE, HOW and WHEN you want.





# ROTTERDAM SERIES

Plug in R290 refrigeration doors multidecks  
MDCP · MLDCPM1



PLUG IN

FOR



## AVAILABLE MODELS

ML09DCPCM1 ML12DCPCM1 ML18DCPCM1  
ML25DCPCM1 ML09DCPIM1 ML12DCPIM1  
ML18DCPIM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	ML09DCPCM1	ML12DCPCM1	ML18DCPCM1	ML25DCPCM1	ML09DCPIM1	ML12DCPIM1	ML18DCPIM1
LENGTH (in)	37	49 1/5	73 5/6	98 3/7	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	14 5/8	19 1/2	29 1/5	39	14 5/8	19 1/2	29 1/5
TDA (ft²)	12 1/4	16 1/4	24 3/4	32 5/7	12 1/4	16 1/4	24 3/4

## GENERAL DATA

MEASURE (in)	34 27/32 x 78 23/32 x **L (in)
SHELVES (in)	16 11/16
N° SHELVES	4
EXPOSITION DECK (in)	23 13/16
SIDE PANEL THICKNESS (in)	1 4/7

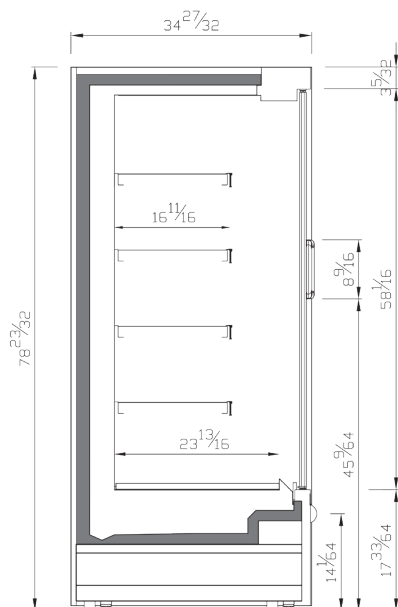

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- LED Vertical Light
- LED Shelf Lighting
- Condensing Control System



# MUNICH SERIES

Plug in R290 refrigeration opens low front multidecks


MP · MLPM1



FOR



PLUG IN



## AVAILABLE MODELS

ML09PCM1

ML12PCM1

ML18PCM1

ML25PCM1

ML09PIM1

ML12PIM1

ML18PIM1

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R - 290

**PRODUCT TEMP:** 30°F / 41°F

## GENERAL DATA

MODEL	ML09PCM1	ML12PCM1	ML18PCM1	ML25PCM1	ML09PIM1	ML12PIM1	ML18PIM1
LENGTH (in)	37	49 1/5	73 5/6	98 3/7	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	15 3/5	20 4/5	31 2/9	41 3/5	15 3/5	20 4/5	31 2/9
TDA (ft²)	15 1/2	20 2/3	31	41 1/3	15 1/2	20 2/3	31

## GENERAL DATA

MEASURE (in)	34 27/32 x 78 23/32 x **L (in)
SHELVES (in)	16 11/16
N° SHELVES	4
EXPOSITION DECK (in)	23 13/16
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Adjustable feet
- Enamelled steel base

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.

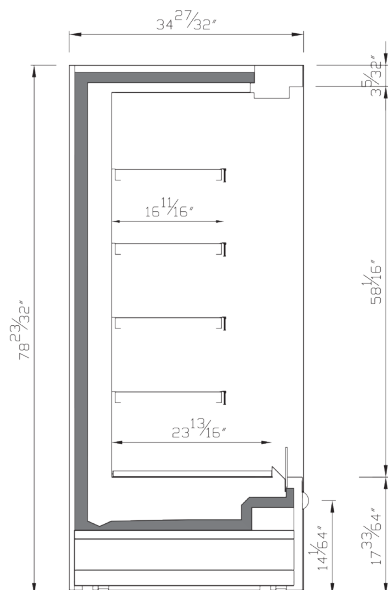

COMMERCIAL SECTION





# LOW MULTIDECK DISPLAY CASE



## EDINBURGH SERIES

**SMDG - SMPB**

Remote refrigeration  
open and closed low multidecks.

**Pg.46**



## DUBLIN SERIES

**SMDCP**

Plug in refrigeration  
doors lowmultidecks.

**Pg.50**



## GLASGOW SERIES

**SMP**

Closed plug-in refrigeration low multidecks  
with double sliding glazed doors with  
tempered and low emissivity glass.

**Pg.54**



# EDINBURGH

**SMDG · SMPB** · Remote refrigeration open and closed low multidecks



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Sliding doors with soft closing as standard Wide range of options, end panels and customization possibilities.



## **OPTIMIZED PRODUCT SIZES FOR MAXIMUM CAPACITY WITH A SMALLER FOOTPRINT**

Width 35 3/7, height 59 (in) and lengths from 49 1/5 to 147 2/3 (in).



## **FULL VISIBILITY OF THE DISPLAY PRODUCTS**

Fully transparent double glass doors or display front on open models High efficiency LED lighting.



## **PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS**








# EDINBURGH SERIES

Remote refrigeration open and closed low multidecks

SMLDG



REMOTE



FOR



## AVAILABLE MODELS

SML12DGM1

SML18DGM1

SML25DGM1

SML37DGM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	SML12DGM1	SML18DGM1	SML25DGM1	SML37DGM1
LENGTH (in)	49 1/5	73 5/6	98 3/7	147 2/3
TOTAL VOLUME (ft³)	17 1/16	25 3/4	34 1/3	51 1/2
TDA (ft²)	16	24	32	48

## GENERAL DATA

MEASURE (in)	35 9/16 x 59 1/16 x **L (in)
SHELVES (in)	11 13/16 · 13 3/4 · 15 3/4
N° SHELVES	3
EXPOSITION DECK (in)	23 5/8
SIDE PANEL THICKNESS (in)	1 4/7

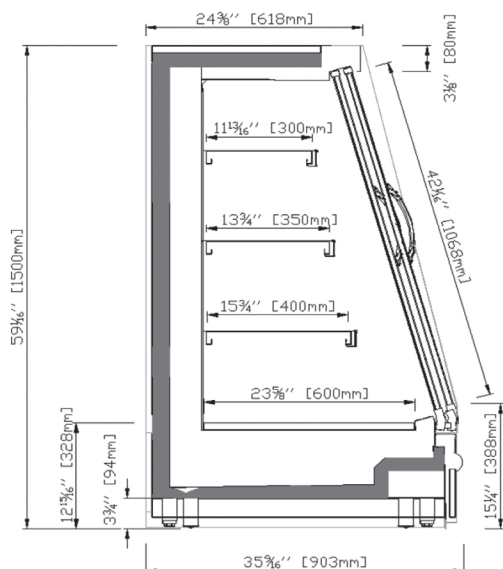

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.




# EDINBURGH SERIES

Remote refrigeration open and closed low multidecks  
SMLPB



REMOTE



FOR



## AVAILABLE MODELS

SML12PBM1

SML18PBM1

SML25PBM1

SML37PBM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	SML12PBM1	SML18PBM1	SML25PBM1	SML37PBM1
LENGTH (in)	49 1/5	73 5/6	98 3/7	147 2/3
TOTAL VOLUME (ft³)	17 1/6	25 3/4	34 1/3	51 1/2
TDA (ft²)	16	24	32	48

## GENERAL DATA

MEASURE (in)	35 5/8 x 59 x **L (in)
SHELVES (in)	11 1/2 · 13 1/2 · 17 1/2
N° SHELVES	3
EXPOSITION DECK (in)	23 1/2
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature

### Refrigeration:

- Digital temperature controller with automatic defrost system.

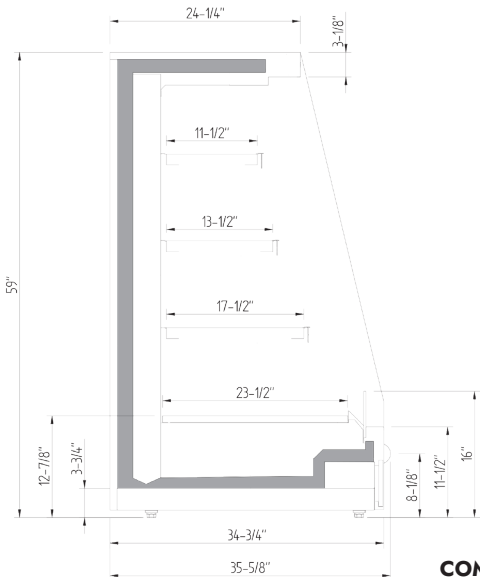

COMMERCIAL SECTION

# DUBLIN

**SMDCP** · Plug in refrigeration doors low  
multidecks



## EXCELLENCE IN THE SHOPPING EXPERIENCE

Sliding doors with soft closing as standard Wide range of options, end panels and customization possibilities.



## OPTIMIZED PRODUCT SIZES FOR MAXIMUM CAPACITY WITH A SMALLER FOOTPRINT

Width 35 3/7, height 59 and lengths from 49 1/5 to 98 3/7 (in).



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

Sliding full transparent double glass doors High efficiency LED lighting.



## PREPARED TO DISPLAY ALL TYPES OF REFRIGERATED PRODUCTS





## DUBLIN SERIES

Plug in refrigeration doors low multidecks  
SMLDCP



PLUG IN



FOR



### AVAILABLE MODELS

SML12DCPCM1 SML18DCPCM1 SML25DCPCM1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	SML12DCPCM1	SML18DCPCM1	SML25DCPCM1
LENGTH (in)	49 1/5	73 5/6	98 3/7
TOTAL VOLUME (ft³)	16	24	32
TDA (ft²)	13	18 2/7	23 2/3

### GENERAL DATA

MEASURE (in)	34 5/8 x 58 1/2 x **L (in)
SHELVES (in)	9 5/8 · 11 1/2 · 13 1/2
N° SHELVES	3
EXPOSITION DECK (in)	23 1/2
SIDE PANEL THICKNESS (in)	1 4/7

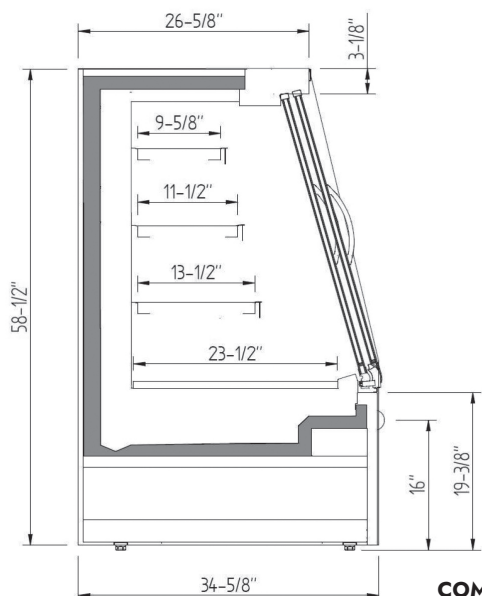

COMMERCIAL SECTION

### STANDAR FEATURES

#### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature

#### Refrigeration:

- Digital temperature controller with automatic defrost system.







# GLASGOW

**SMP** · Closed plug-in refrigeration low multidecks with double sliding glazed doors with tempered and low emissivity glass



## EXCELLENCE IN THE SHOPPING EXPERIENCE

No canopy product for easy ergonomic access to the product. Wide range of options, end panels and customization possibilities.



## OPTIMIZED PRODUCT SIZES FOR MAXIMUM CAPACITY WITH A SMALLER FOOTPRINT

Width 35 3/7, height 59 (in) and lengths from 49 1/5 to 73 5/6 (in).



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

Low front with display. High efficiency LED lighting.



## PLUG IN LOW MULTIDECK R290 PREPARED TO DISPLAY REFRIGERATED PRODUCTS







# GLASGOW SERIES

Semi vertical air curtains

SMLP



PLUG IN



FOR



## AVAILABLE MODELS

SML09PCM2

SML12PCM2

SML18PCM2

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	SML09PCM2	SML12PCM2	SML18PCM2
LENGTH (in)	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	9 1/2	12 2/3	19
TDA (ft²)	9 1/2	12 3/5	18 5/6

## GENERAL DATA

MEASURE (in)	34 7/8 x 59 1/4 x **L (in)
SHELVES (in)	9 3/4 · 11 3/4 · 13 3/4
N° SHELVES	3
EXPOSITION DECK (in)	23 1/2
SIDE PANEL THICKNESS (in)	1 4/7

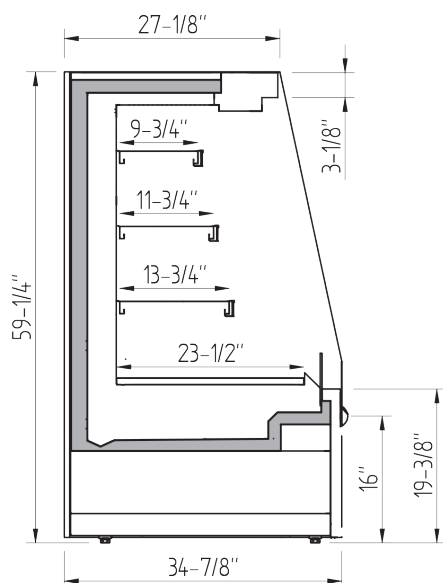

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Adjustable feet
- Enamelled steel base.
- Modulaire line design.

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainlees steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.











# REFRIGERATION SUPERMARKET COUNTERS



## **BARCELONA SERIES**

**VBC**

Barcelona supermarket display counter for meat and deli

**Pg.60**



## **VALENCIA SERIES**

**VVL**

Self-service promotional display counter

**Pg.66**



## **MALAGA SERIES**

**VML**

Refrigerated display counter for fish

**Pg.66**



## **ELEGANCE SERIES**

**VEG**

Semi-mural plug-in R 290 refrigeration elegance series display counter aesthetic

**Pg.70**



## **EXPERIENCE SERIES**

**VEX**

Experience supermarket counter for meat and deli

**Pg.74**



## **CALIFORNIA SERIES**

**VEE**

Narrow display counter for ready meals

**Pg.82**



# BARCELONA

**VBC** · Supermarket display counter for meat and deli.



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Remote (racks) and plug in models Wide range of options, end panels and customization possibilities.



## **WIDE PRODUCT RANGE WITH DESIGNS FOR ALL TYPES OF COMMERCIAL SALES**

Models with and without storage refrigerated Straight or curved glass structure Traditional or self-service sales.



## **FULL VISIBILITY OF THE DISPLAY PRODUCTS**

Illuminated glass middle shelf High efficiency double row LED lighting.



## **PREPARED TO DISPLAY ALL TYPES OF UNPACKAGED REFRIGERATED AND HOT PRODUCTS**

Meat, Deli and prepared food.





## BARCELONA SERIES

Supermarket display counter for meat & deli.

VBC | VBCRIUCP WITH STORAGE



PLUG IN

FOR



### AVAILABLE MODELS

VBC9RIUCP

VBC12RIUCP

VBC15RIUCP

VBC18RIUCP

VBC25RIUCP

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	VBC9RIUCP	VBC12RIUCP	VBC15RIUCP	VBC18RIUCP	VBC25RIUCP
LENGTH (in)	37	49 1/5	61 1/2	73 5/6	98 3/7
TOTAL VOLUME (ft³)	5	6 4/7	8 1/5	9 6/7	13 1/8
TDA (ft²)	7 1/16	9 5/9	12	14 1/3	19

### GENERAL DATA

MEASURE (in)	46 3/8 x 35 5/16 x **L (in)
SHELVES (in)	8 1/4
N° SHELVES	1
EXPOSITION DECK (in)	27 3/8
SIDE PANEL THICKNESS (in)	1 1/6

### STANDAR FEATURES

#### Exterior:

- AISI 304 Stainless Steel
- Glass sided panels
- Heavy duty ball transfer and levelling feet.

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

#### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

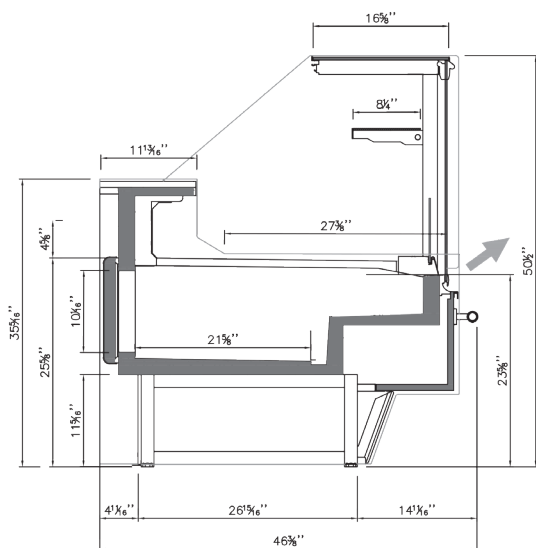

COMMERCIAL SECTION




# BARCELONA SERIES

Supermarket display counter for meat & deli.  
VBCRIUCP CORNERS WITH STORAGE



PLUG IN



FOR



## AVAILABLE MODELS

VBC90ARIUCP    VBC90CRIUCP

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VBC90ARIUCP	VBC90CRIUCP
LENGTH (in)	73	105
TOTAL VOLUME (ft³)	6 8/9	7 4/7
TDA (ft²)	—	—

## GENERAL DATA

MEASURE (in)	46 1/2 x 35 3/8 x **L (in)
SHELVES (in)	8 1/4
N° SHELVES	1
EXPOSITION DECK (in)	30 5/16
SIDE PANEL THICKNESS (in)	1 1/6

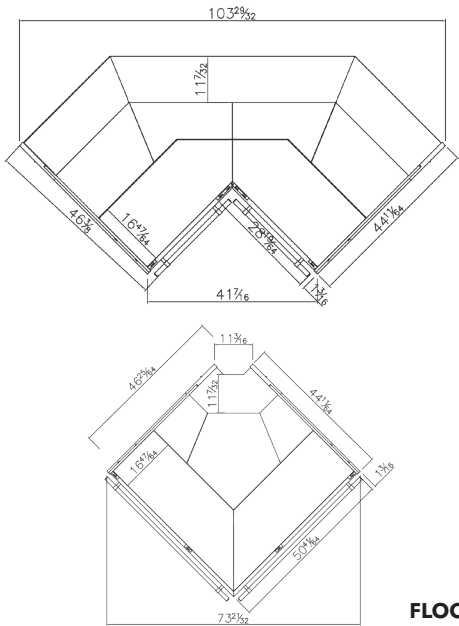

FLOOR PLAIN

## STANDAR FEATURES

### Exterior:

- AISI 304 Stainless Steel
- Glass sided panels
- Heavy duty ball transfer and levelling feet.

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.m.

## BARCELONA SERIES

Supermarket display counter for meat & deli.

VBC | VBCSIUCP WITHOUT STORAGE



PLUG IN

FOR



### AVAILABLE MODELS

VBC9SIUCP	VBC12SIUCP	VBC15SIUCP
VBC18SIUCP	VBC25SIUCP	

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	VBC9SIUCP	VBC12SIUCP	VBC15SIUCP	VBC18SIUCP	VBC25SIUCP
LENGTH (in)	37	49 1/5	61 1/2	73 5/6	98 3/7
TOTAL VOLUME (ft³)	5	6 4/7	8 1/5	9 6/7	13 1/8
TDA (ft²)	7 1/16	9 5/9	12	14 1/3	19

### GENERAL DATA

MEASURE (in)	46 1/2 x 35 3/8 x **L (in)
SHELVES (in)	8 1/4
N° SHELVES	1
EXPOSITION DECK (in)	30 5/16
SIDE PANEL THICKNESS (in)	1 1/6

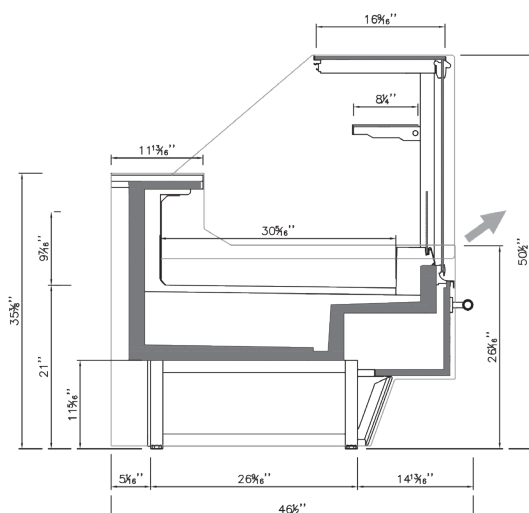

### STANDAR FEATURES

#### Exterior:

- AISI 304 Stainless Steel
- Glass sided panels
- Heavy duty ball transfer and levelling feet.

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature.

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

COMMERCIAL SECTION




# BARCELONA SERIES

Supermarket display counter for meat & deli.  
VBCSIUCP CORNERS WITHOUT STORAGE



PLUG IN



FOR



## AVAILABLE MODELS

VBC90ASIUCP    VBC90CSIUCP

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VBC90ASIUCP	VBC90CSIUCP
LENGTH (in)	73	105
TOTAL VOLUME (ft³)	6 8/9	7 4/7
TDA (ft²)	—	—

## GENERAL DATA

MEASURE (in)	46 3/8 x 35 5/16 x **L (in)
SHELVES (in)	8 1/4
N° SHELVES	1
EXPOSITION DECK (in)	30 5/16
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- AISI 304 Stainless Steel
- Glass sided panels
- Heavy duty ball transfer and levelling feet.

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.m.

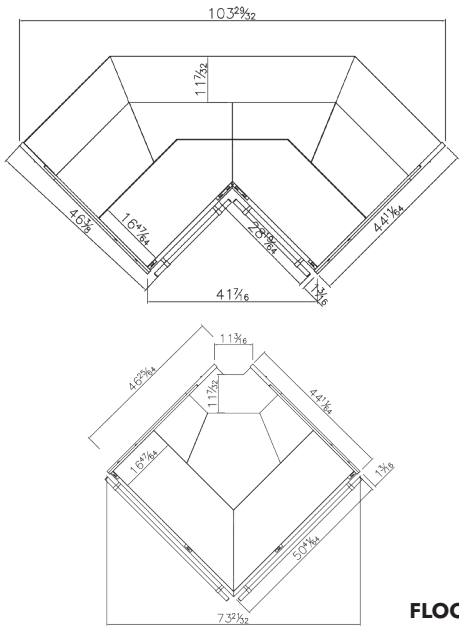

FLOOR PLAIN

# VALENCIA

VVL · Self-service promotional display counter

# MALAGA

VML · Refrigerated display counter for fish



**EXCELLENCE IN THE SHOPPING  
EXPERIENCE**




**LAYOUT MAXIMUM FLEXIBILITY**



**FULL VISIBILITY OF THE DISPLAY  
PRODUCTS**



**PROMOTIONAL DISPLAY COUNTER  
FOR IMPULSE SALES**

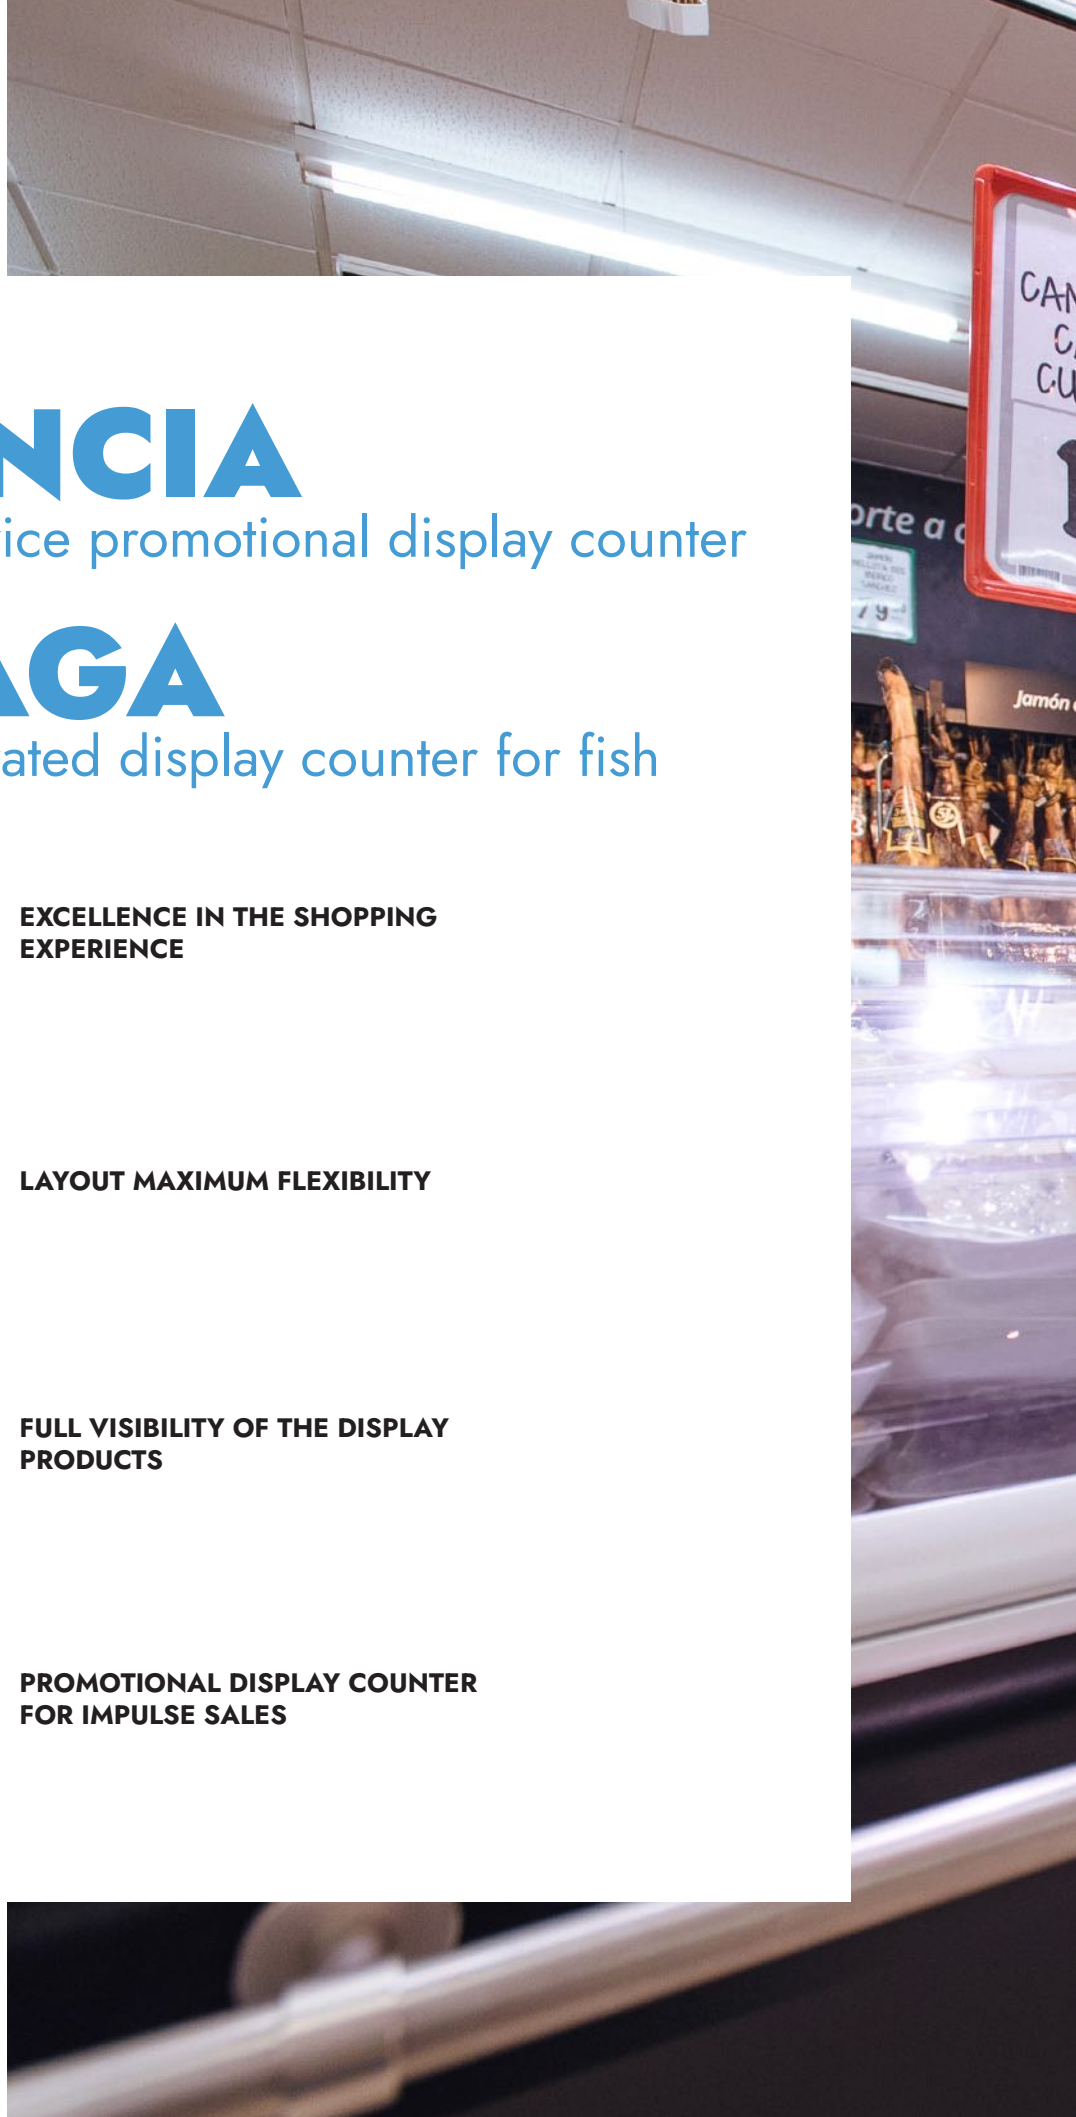





# VALENCIA SERIES

Self-service promotional display counter  
VVL



PLUG IN

FOR



## AVAILABLE MODELS

VVL10

VVL12

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VVL10	VVL12
LENGTH (in)	37	49 1/5
TOTAL VOLUME (ft³)	4 2/5	6 2/9
TDA (ft²)	9 1/6	12 1/4

## GENERAL DATA

MEASURE (in)	45 15/32 x 35 5/16 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	32 7/8
SIDE PANEL THICKNESS (in)	—

## STANDAR FEATURES

### Exterior:

- AISI 304 stainless steel exterior.
- Glass sided panels.
- Enamelled steel base.

### Interior:

- AISI 304 stainless steel interior
- Stainless Steel perforated removable panels
- Enameled steel bench. Internal drain for cleaning.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature

### Refrigeration:

- Digital temperature controller with automatic defrost system.

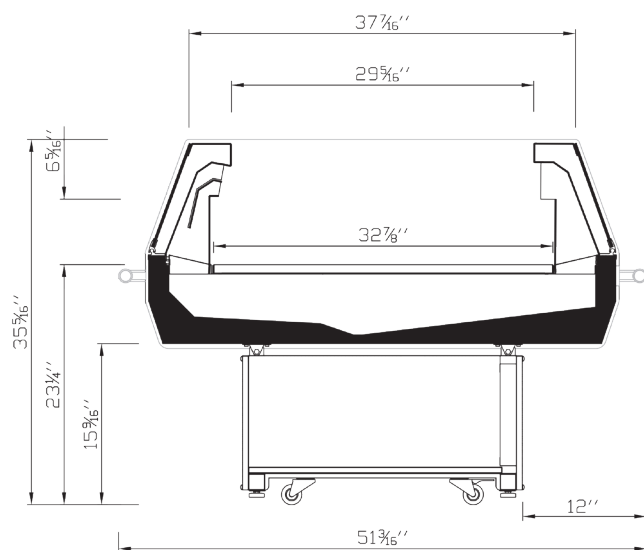

COMMERCIAL SECTION




# MÁLAGA SERIES

Refrigerated display counter for fish  
VML



PLUG IN

FOR



## AVAILABLE MODELS

VML12

VML15

VML18

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 30°F / 34°F

## GENERAL DATA

MODEL	VML12	VML15	VML18
LENGTH (in)	49 1/5	61 1/2	73 5/6
TOTAL VOLUME (ft³)	4	8 3/8	12 5/7
TDA (ft²)	8 1/2	10 2/3	12 4/5

## GENERAL DATA

MEASURE (in)	35 7/16 x 51 13/16 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	—
SIDE PANEL THICKNESS (in)	—

## STANDAR FEATURES

### Exterior:

- AISI 304 stainless steel exterior.
- AISI 304 Stainless Steel Worktop.
- Tempered curved glass.

### Interior:

- AISI 304 stainless steel interior.
- Stainless Steel perforated removable panels.
- Enameled steel bench.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- NTC temperature probes encapsulated and sealed.
- Temperature and defrosting regulated by a digital controller.

### Refrigeration:

- Evaporators treated with anticorrosion polyester epoxy.
- Manual defrosting.

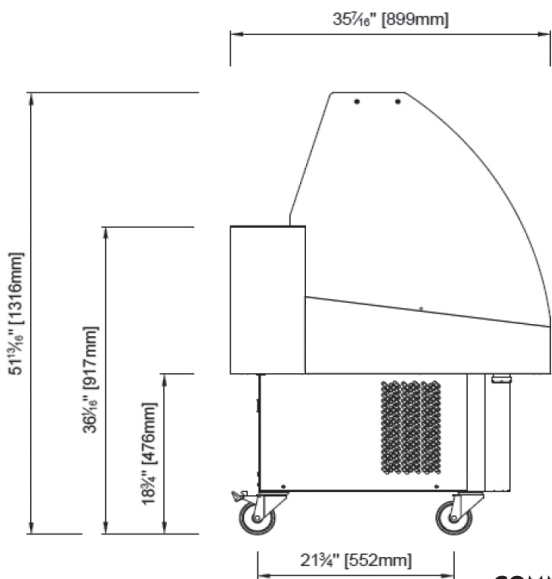

COMMERCIAL SECTION

# ELEGANCE

**VEG** · Semi-mural plug-in R 290 refrigeration  
elegance series display counters aesthetic



## EXCELLENCE IN THE SHOPPING EXPERIENCE

No canopy product for easy ergonomic access to the product.

Wide range of options, end panels and customization possibilities



## ESTHETIC TYPE COUNTERS WITH A HIGH FRONT TO SET THE SALES AREA WITH THE SUPERMARKET COUNTERS DISPLAY CASES.



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

Low front with display

High efficiency LED lighting



## PLUG IN LOW MULTIDECK R290 PREPARED TO DISPLAY REFRIGERATED PRODUCTS

Eco-friendly version







**InfriCo**



## ELEGANCE SERIES

Semi-mural plug-in R 290 refrigeration elegance series display counters aesthetic VEG



PLUG IN

FOR



### AVAILABLE MODELS

VEG9U

VEG12U

VEG15U

VEG18U

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	VEG9U	VEG12U	VEG15U	VEG18U
LENGTH (in)	37	49 1/5	61 1/2	73 5/6
TOTAL VOLUME (ft³)	11 1/6	15	18 3/4	22 1/2
TDA (ft²)	9	12	15	18

### GENERAL DATA

MEASURE (in)	41 29/32 x 49 3/8 x **L (in)
SHELVES (in)	9 3/4
N° SHELVES	1
EXPOSITION DECK (in)	29 3/16
SIDE PANEL THICKNESS (in)	1 1/6

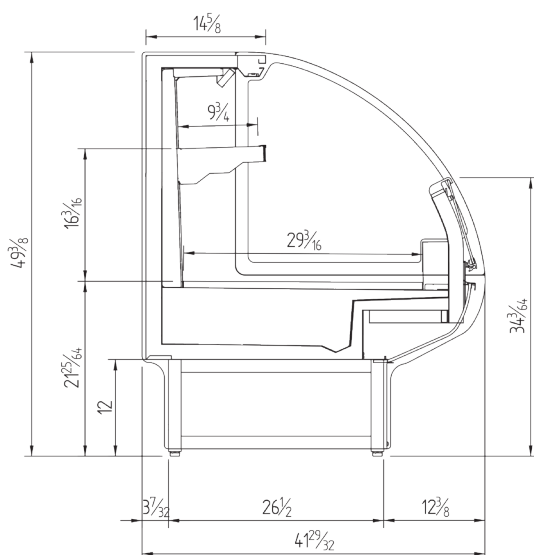

COMMERCIAL SECTION

### STANDAR FEATURES

#### Exterior:

- Full size double panel glass doors that prevent heat transmission
- Epoxy painted steel sheet
- Double panel glass sides

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

#### Refrigeration:

- Digital temperature controller with automatic defrost system.





# EXPERIENCE

**VEX** · Experience supermarket counter for meat and deli



## **EXCELLENCE IN THE SHOPPING EXPERIENCE**

Remote (racks) and plug in models.

Wide range of options, end panels and customization possibilities.



## **WIDE PRODUCT RANGE WITH DESIGNS FOR ALL TYPES OF COMMERCIAL SALES**

Straight or curved glass structure.

Traditional or self-service sales.



## **FULL VISIBILITY OF DISPLAY PRODUCTS**

High transparency glass.

High efficiency double row LED lighting.



## **PREPARED TO DISPLAY ALL TYPES OF UNPACKAGED REFRIGERATED AND HOT PRODUCTS**

Meat, Deli and prepared food





## EXPERIENCE SERIES


Experience supermarket counter for meat and deli

VEX · VEXCP

REMOTE



FOR



### AVAILABLE MODELS

VEX9CP	VEX12CP	VEX15CP
VEX18CP	VEX25CP	VEX31CP
VEX37CP		

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** Freon, CO2

**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	VEX9CP	VEX12CP	VEX15CP	VEX18CP	VEX25CP	VEX31CP	VEX37CP
LENGTH (in)	37	49 1/5	61 1/2	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	6	8	10	12	15 8/9	19 7/8	23 5/6
TDA (ft²)	13	16 5/7	20 1/3	24	31 1/6	38 2/5	45 2/3

### GENERAL DATA

MEASURE (in)	48 3/8 x 50 1/4 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	35 3/8
SIDE PANEL THICKNESS (in)	1 4/7

### STANDAR FEATURES

#### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

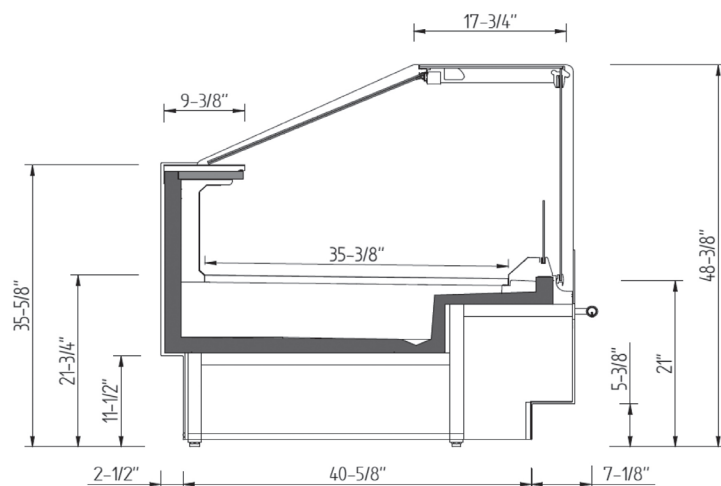

### COMMERCIAL SECTION



# EXPERIENCE SERIES

Experience supermarket counter for meat and deli  
**VEX · VEXCP CORNERS**



## AVAILABLE MODELS

VEX90AACP    VEX90ACCP

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz  
**REFRIGERANT CONNECTION:** Freon, CO2  
**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA


MODEL	VEX90AACP	VEX90ACCP
LENGTH (in)	76	109
TOTAL VOLUME (ft³)	5	7 1/3
TDA (ft²)	—	—

## GENERAL DATA

MEASURE (in)	SEE FLOOR PLAIN
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	35 3/8
SIDE PANEL THICKNESS (in)	1 4/7

## STANDAR FEATURES

- Exterior:**
- Epoxy painted steel sheet
  - Double panel glass sides
  - Adjustable feet
- Interior:**
- AISI 304 Stainless Steel.
  - Stainless Steel internal panel perforated.
  - Height and incline adjustable stainless steel shelves
- Insulation:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Electrical and electronic controllers:**
- Remote alarm signals.
  - Encapsulated and sealed NTC temperature probes.
  - Effective way to visualize temperature
- Refrigeration:**
- Digital temperature controller with automatic defrost system.

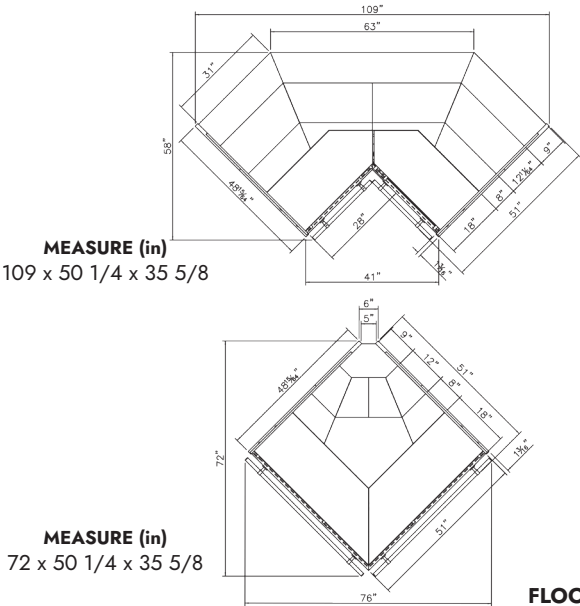

## EXPERIENCE SERIES

Experience supermarket counter for meat and deli

VEX · VEXIUCP

PLUG IN



FOR



### AVAILABLE MODELS

VEX9UCP	VEX12UCP	VEX15UCP
VEX18UCP	VEX25UCP	VEX31UCP
VEX37UCP		

**ELECTRICAL DATA:** 115 / 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

### GENERAL DATA

MODEL	VEX9UCP	VEX12UCP	VEX15UCP	VEX18UCP	VEX25UCP	VEX31UCP	VEX37UCP
LENGTH (in)	37	49 1/5	61 1/2	73 5/6	98 3/7	123	147 2/3
TOTAL VOLUME (ft³)	7 4/9	10	12 2/5	14 8/9	19 6/7	24 5/6	29 4/5
TDA (ft²)	9 3/8	12 1/2	15 3/5	18 3/4	25	31 2/9	37 1/2

### GENERAL DATA

MEASURE (in)	48 3/8 x 50 1/4 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	35 3/8
SIDE PANEL THICKNESS (in)	1 1/6

### STANDAR FEATURES

#### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

#### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz
- Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

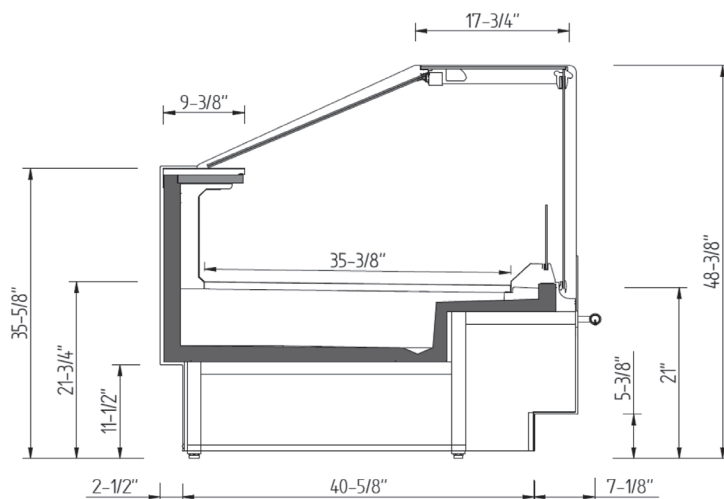

### COMMERCIAL SECTION




# EXPERIENCE SERIES

Experience supermarket counter for meat and deli  
**VEX · VEXIUCP CORNERS**



PLUG IN



FOR



## AVAILABLE MODELS

VEX90AAUCP    VEX90ACUCP

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VEX90AAUCP	VEX90ACUCP
LENGTH (in)	76	109
TOTAL VOLUME (ft³)	5	7 1/3
TDA (ft²)	—	—

## GENERAL DATA

MEASURE (in)	SEE FLOOR PLAIN
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	35 3/8
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.

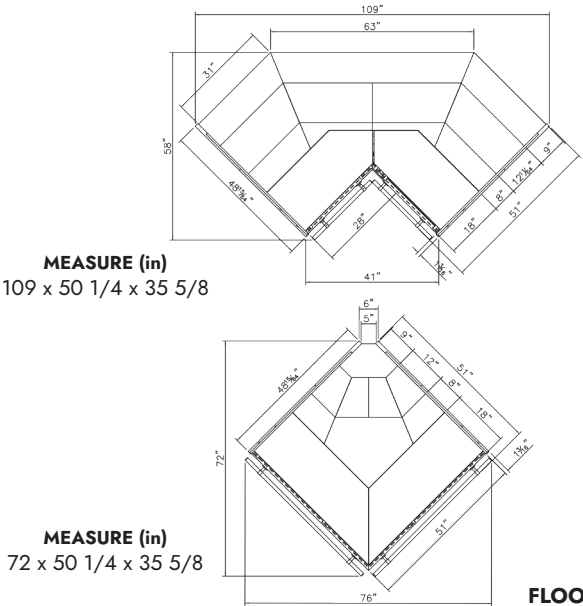

# EXPERIENCE SERIES

Experience hot display counter

VEX · VEXCPHT



WARM HOLDING CASE

HOT



## AVAILABLE MODELS

VEX12CPHT

VEX25CPHT

**ELECTRICAL DATA:** 220 V / 1Ph or 3Ph / 60 Hz

**PRODUCT TEMP:** 131°F / 140°F

## GENERAL DATA

MODEL	VEX12CPHT	VEX25CPHT
LENGTH (in)	51 4/7	100 4/5
TOTAL VOLUME (ft³)	11 1/2	22
TDA (ft²)	12	24

## GENERAL DATA

MEASURE (in)	50 55/64 x 48 5/32 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	35 7/16
SIDE PANEL THICKNESS (in)	—

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Glass sided panels
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- LED lighting in canopy and under each shelf.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature and monitor all processes through a digital screen.
- Electrical connections is 220 V/ 1ph/ 60 Hz or 220 V/ 3ph/ 60 Hz

### Control:

- Digital temperature controller.
- Forced hot air movement.

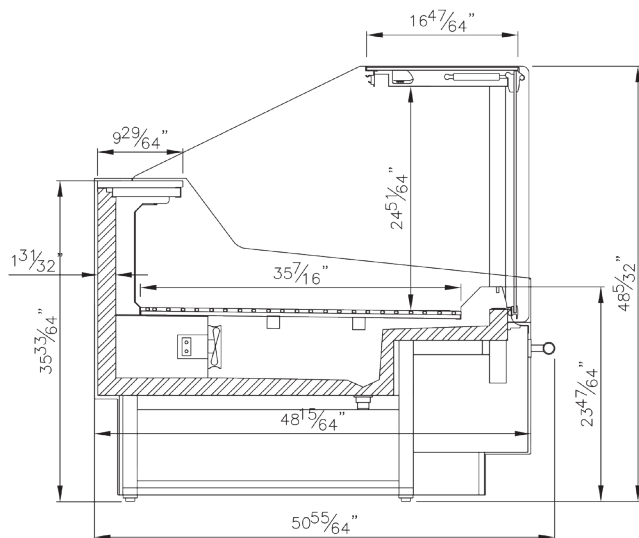

COMMERCIAL SECTION









# CALIFORNIA

VEE · Narrow display counters for ready meals



## EXCELLENCE IN THE SHOPPING EXPERIENCE

Remote (racks) and plug in models

Wide range of options, end panels and customization possibilities.



## WIDE PRODUCT RANGE WITH DESIGNS FOR ALL TYPES OF COMMERCIAL SALES, ESPECIALLY READY MEALS

Designs for display counters in traditional service for refrigerated products and salads on a self-service.

Designs for display counters in traditional service for hot products in Gastronorm trays and flat exposition deck.



## FULL VISIBILITY OF DISPLAY PRODUCTS


High transparency glass

High efficiency double row LED lighting.



## PREPARED TO DISPLAY ALL TYPES OF UNPACKAGED REFRIGERATED CONVENIENCE FOOD AND HOT PRODUCTS

Prepared food, Deli and Meat

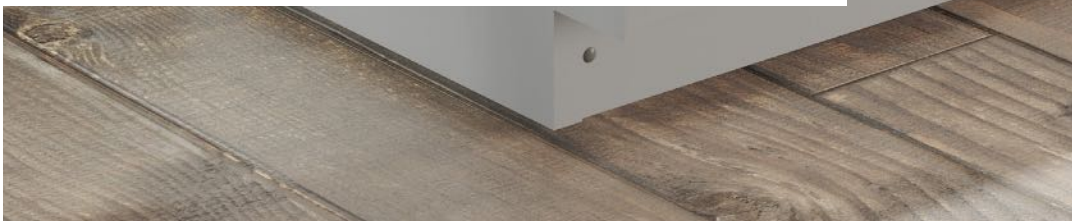





# CALIFORNIA SERIES

Counter

VEE · VEEU



PLUG IN

FOR



## AVAILABLE MODELS

VEE12U

VEE18U

VEE25U

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VEE12U	VEE18U	VEE25U
LENGTH (in)	49 1/5	73 5/6	98 3/7
USEABLE VOLUME (ft³)	8	12	15 8/9
TDA (ft²)	9	13 1/2	18

## GENERAL DATA

MEASURE (in)	36 15/32 x 63 47/64 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	23 9/16
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- LED lighting in canopy.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.
- Forced Air Evaporator.
- Forced Air circulation to desipate hot air.

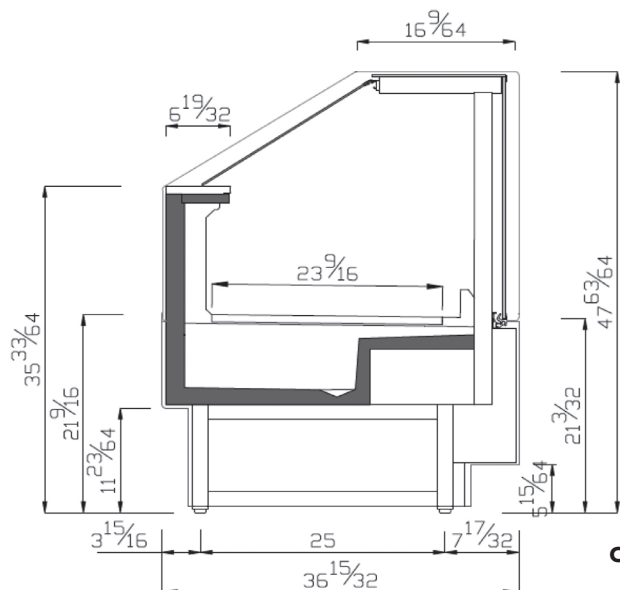

COMMERCIAL SECTION




# CALIFORNIA SERIES

Hot Display Counter  
VEE · VEEHT



WARM HOLDING CASE



AVAILABLE MODELS

VEE12HT

**ELECTRICAL DATA:** 220 V / 1Ph or 3Ph / 60 Hz

**PRODUCT TEMP:** 131°F / 140°F

GENERAL DATA

MODEL	VEE12HT
LENGTH (in)	49 1/5
TOTAL VOLUME (ft³)	8
TDA (ft²)	8

GENERAL DATA

MEASURE (in)	36 15/32 x 47 63/64 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	23 9/16
SIDE PANEL THICKNESS (in)	1 1/6

STANDAR FEATURES

Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

Refrigeration:

- Digital temperature controller with automatic defrost system.

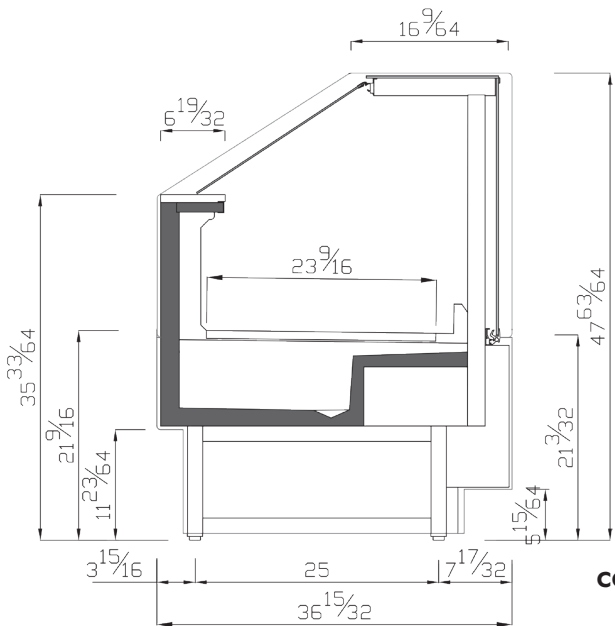

COMMERCIAL SECTION

# CALIFORNIA SERIES

Counter Tower

VEE · VEEUCA



PLUG IN



FOR



## AVAILABLE MODELS

VEE9UCA

VEE12UCA

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VEE9UCA	VEE12UCA
LENGTH (in)	37	49 1/5
USEABLE VOLUME (ft³)	6 5/7	9
TDA (ft²)	1 1/7	1 1/2

## GENERAL DATA

MEASURE (in)	36 15/32 x 59 7/32 x **L (in)
SHELVES (in)	14 25/64 · 11 15/64
N° SHELVES	2
EXPOSITION DECK (in)	23 33/64
SIDE PANEL THICKNESS (in)	1 1/6

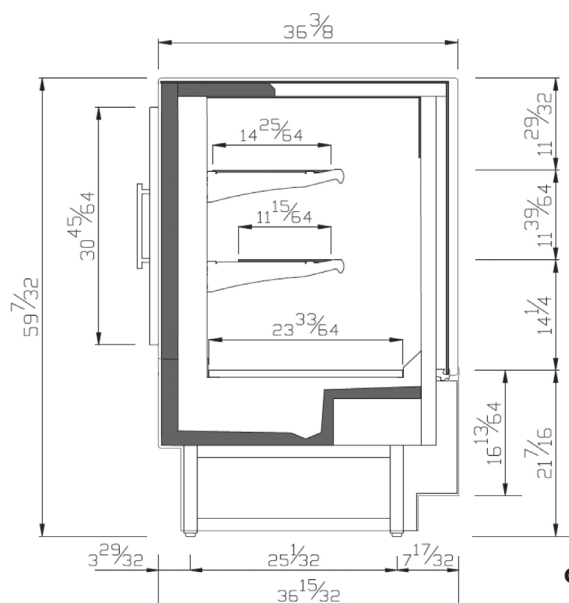

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Height and incline adjustable stainless steel shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.
- Forced Air Evaporator.
- Forced Air circulation to desipate hot air.




# CALIFORNIA SERIES


Gastronorm counter 12 x 20 Inches Trays  
VEE · VEEGC




WARM HOLDING CASE

HOT







## AVAILABLE MODELS

VEE12GC

**ELECTRICAL DATA:** 220 V / 1Ph or 3Ph / 60 Hz

**PRODUCT TEMP:** 131°F / 140°F

## GENERAL DATA

MODEL	VEE12GC
LENGTH (in)	49 1/5
TOTAL VOLUME (ft³)	8
TDA (ft²)	8

## GENERAL DATA

MEASURE (in)	36 15/32 x 47 63/64 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	20 9/64
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Glass sided panels
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- LED lighting in canopy and under each shelf.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature and monitor all processes through a digital screen.
- Electrical connections is 220 V/ 1ph/ 60 Hz or 220 V/ 3ph/ 60 Hz

### Control:

- Digital temperature controller.
- Forced hot air movement.

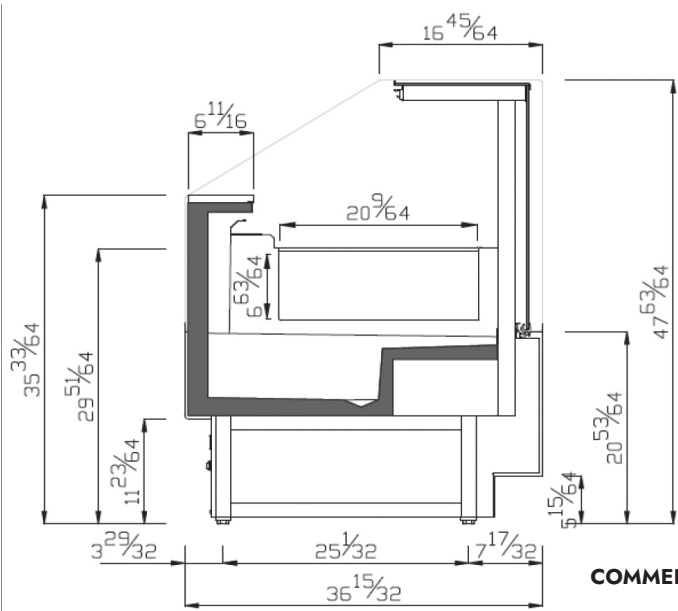

COMMERCIAL SECTION

# CALIFORNIA SERIES

Narrow counter cold trays

VEE · VEESU



PLUG IN

FOR



## AVAILABLE MODELS

VEE12SU

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 33°F / 41°F

## GENERAL DATA

MODEL	VEE12SU
LENGTH (in)	49 1/5
USEABLE VOLUME (ft³)	3 4/9
TDA (ft²)	11 1/5

## GENERAL DATA

MEASURE (in)	36 15/32 x 63 47/64 x **L (in)
SHELVES (in)	12 11/64
N° SHELVES	1
EXPOSITION DECK (in)	23 17/32
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Double panel glass sides
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature
- Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz

### Refrigeration:

- Digital temperature controller with automatic defrost system.
- Forced Air Evaporator.
- Forced Air circulation to desipate hot air.

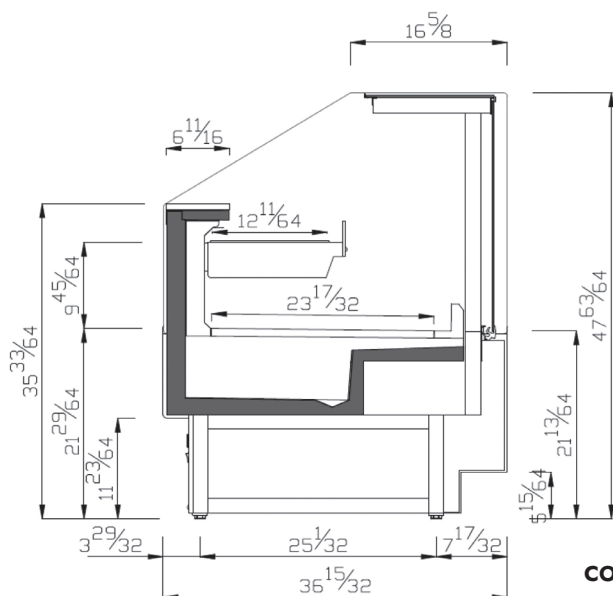

COMMERCIAL SECTION





# FROZEN FOOD





# FREEZER ISLANDS



## ISLANDS SERIES

GD · GDP

Island for frozen products.

Pg.92



# ISLANDS

GD • GDP • Island for frozen products



## EXCELLENCE IN THE SHOPPING EXPERIENCE

Improved impulse sales in the freezer area Display cases without refrigeration installation.



## COMBINE HORIZONTAL SALES

Customize your sales area: in-line, against the wall or with promotional end casessales.



## FULL VISIBILITY OF THE DISPLAY PRODUCTS

Models with product visibility from anywhere in the shop area Large panoramic front glass and Push sliding lids in panoramic islands.



## YOUR PROMOTIONAL FROZEN PRODUCT AT THE POINT-OF-SALE WITHOUT INSTALLATION

Improves attractiveness and tidiness on the freezer line R290 in an environmentally friendly installation.







# ISLANDS

Island for frozen products

GD · GDP



PLUG IN

FOR



## AVAILABLE MODELS

GD21PL1

GD25PL1

GDCPL1

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 0°F / 5°F

## GENERAL DATA

MODEL	GD21PL1	GD25PL1	GDCPL1
LENGTH (in)	82 2/3	98 3/7	82 2/3
TOTAL VOLUME (ft³)	24	28 5/7	24
TDA (ft²)	12 7/8	15 1/3	12 7/8

## GENERAL DATA

MEASURE (in)	38 7/32 x 36 7/32 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	—
SIDE PANEL THICKNESS (in)	—

## STANDAR FEATURES

### Exterior:

- Laminated sheet
- Worktop in compac Quartz white.
- Sides and decoration in water-resistant

### Interior:

- AISI 304 Stainless Steel.
- Low consumption LED lighting.
- Easy slide doors

### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed
- Good visualization of the emperature and of all processes through a digital screen

### Refrigeration:

- Digital temperature controller with automaticdefrost system

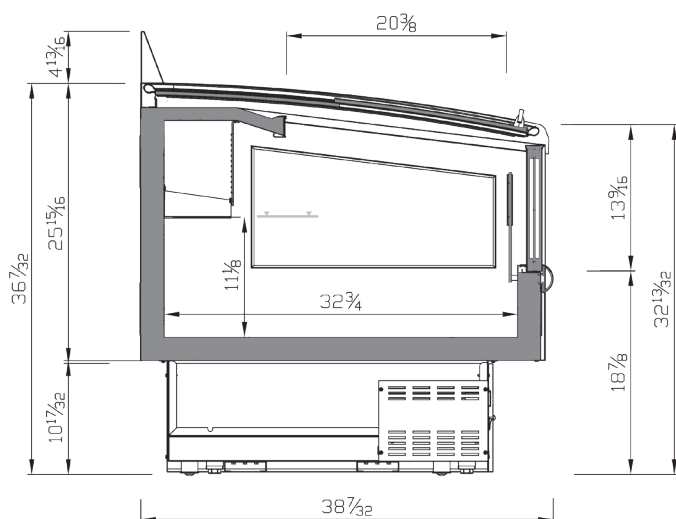

## COMMERCIAL SECTION











# PASTRY & GELATO COUNTER DISPLAY CASES



## **AMBAR SERIES**

**VBR**

Ambar series pastry  
display cases

**Pg.98**



## **COMBO SERIES**

**VCO**

Combo range display  
case for bakery

**Pg.106**



## **ARIES SERIES**

**VARH**

Gelatto display counter

**Pg.110**



## **CORAL SERIES**

**VCB**

Gelatto display counter

**Pg.110**

# AMBAR

VBR · Pastry display cases



**EXCELLENCE IN THE SHOPPING  
EXPERIENCE**




**FLEXIBILITY OF LAYOUT TO COMBINE  
DIFFERENT TYPES OF SALES WITHIN THE  
SAME LINE.**



**TWO DIFFERENT DESIGNS, WITH  
STRAIGHT AND CURVED GLASS, TO  
INTEGRATE INTO ALL SALES AREAS.**



**THE MODULAR RANGE OF PASTRY  
DISPLAY CASES.**

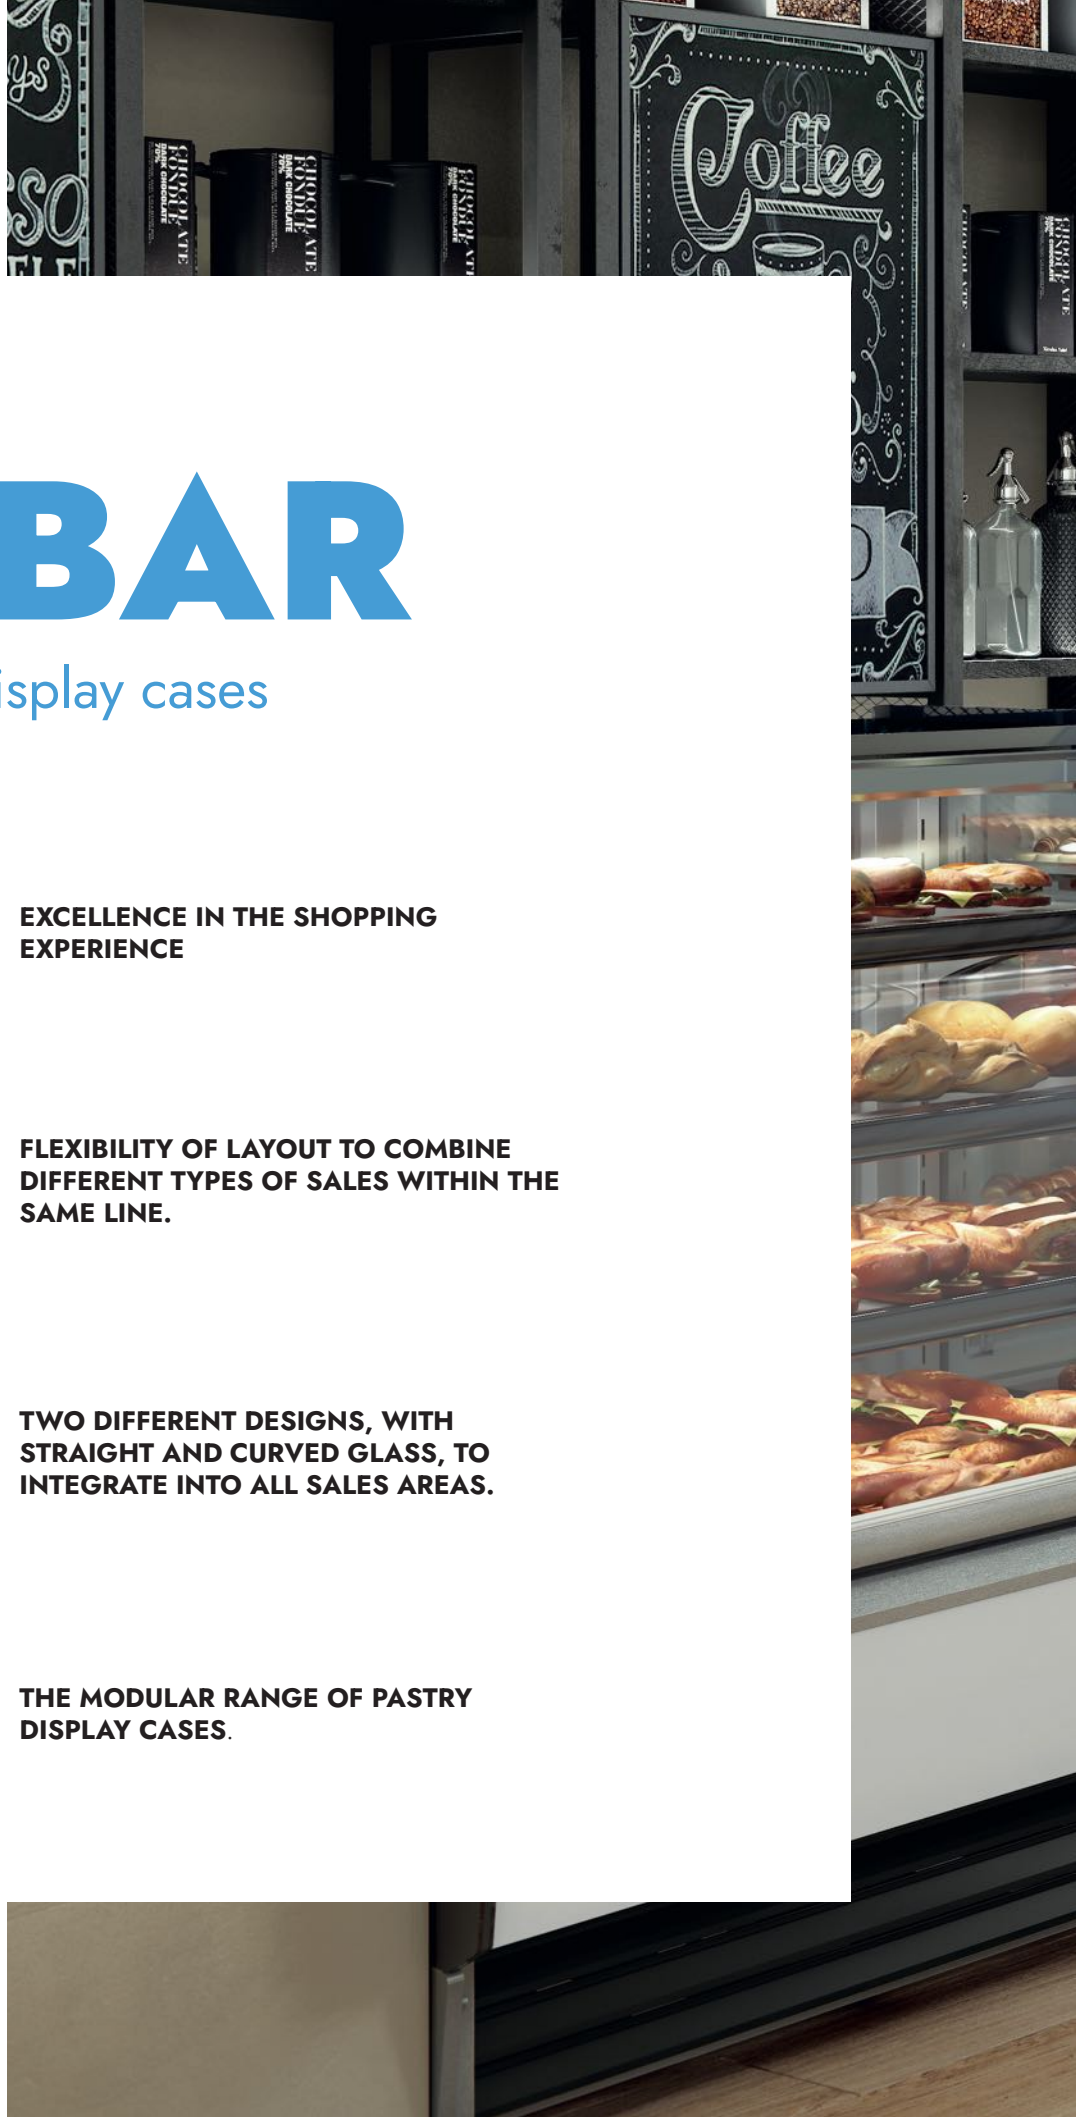







# AMBAR SERIES

Pastry display cases

VBR IR



PASTRY



PLUG IN



## AVAILABLE MODELS

VBR9IR

VBR12IR

VBR18IR

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 39°F / 45°F

## GENERAL DATA

MODEL	VBR9IR	VBR12IR	VBR18IR
LENGTH (in)	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	9 1/4	12 1/3	18 1/2
TDA (ft²)	14 1/2	19 1/3	29

## GENERAL DATA

MEASURE (in)	31 17/32 x 50 23/32 x **L (in)
SHELVES (in)	12 13/16 · 15 15/16 · 17 1/2
N° SHELVES	3
EXPOSITION DECK (in)	19 5/8
SIDE PANEL THICKNESS (in)	1 1/6

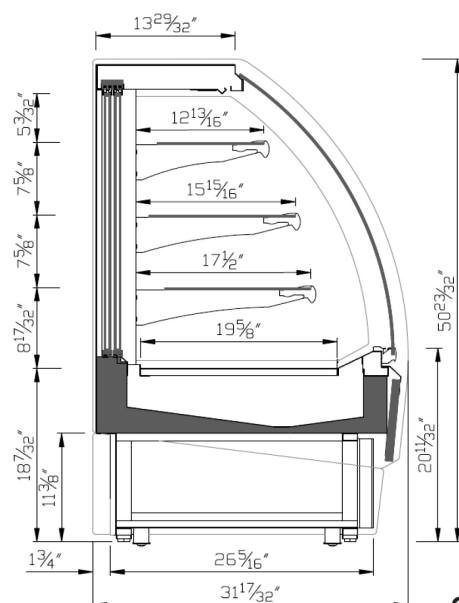

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- AISI 304 Stainless Steel.
- Glass sided panels.
- Heavy duty ball transfer and levelling feet.

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- Shelves Lighting
- Evaporation Heaters



# AMBAR SERIES

Pastry display cases


## VBR ISS



PASTRY



PLUG IN



### AVAILABLE MODELS

VBR9ISS

VBR12ISS

VBR18ISS

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 39°F / 45°F

### GENERAL DATA

MODEL	VBR9ISS	VBR12ISS	VBR18ISS
LENGTH (in)	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	9 1/4	12 1/3	18 1/2
TDA (ft²)	9 1/2	12 5/8	19

### GENERAL DATA

MEASURE (in)	31 17/32 x 50 23/32 x **L (in)
SHELVES (in)	12 13/16 · 15 15/16 · 17 1/2
N° SHELVES	3
EXPOSITION DECK (in)	19 11/16
SIDE PANEL THICKNESS (in)	1 1/6

### STANDAR FEATURES

#### Exterior:

- AISI 304 Stainless Steel.
- Glass sided panels.
- Heavy duty ball transfer and levelling feet.

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

#### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

#### Refrigeration:

- Digital temperature controller with automatic defrost system.

### OPTIONAL EQUIPMENT

- Shelves Lighting
- Evaporation Heaters

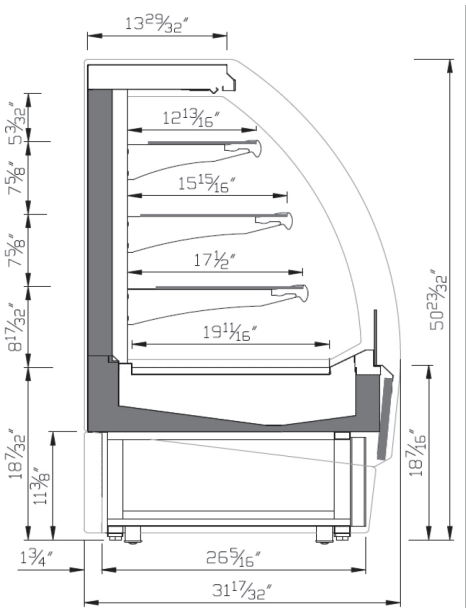

COMMERCIAL SECTION

# AMBAR SERIES

Pastry display cases

VBR IPR



PLUG IN



PASTRY



## AVAILABLE MODELS

VBR9IPR

VBR12IPR

VBR18IPR

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 39°F / 45°F

## GENERAL DATA

MODEL	VBR9IPR	VBR12IPR	VBR18IPR
LENGTH (in)	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	9 2/3	12 8/9	19 1/3
TDA (ft²)	14 1/2	19 1/3	29

## GENERAL DATA

MEASURE (in)	31 3/4 x 51 3/16 x **L (in)
SHELVES (in)	12 15/16 · 16 · 17 5/8
N° SHELVES	3
EXPOSITION DECK (in)	19 7/8
SIDE PANEL THICKNESS (in)	1 1/6

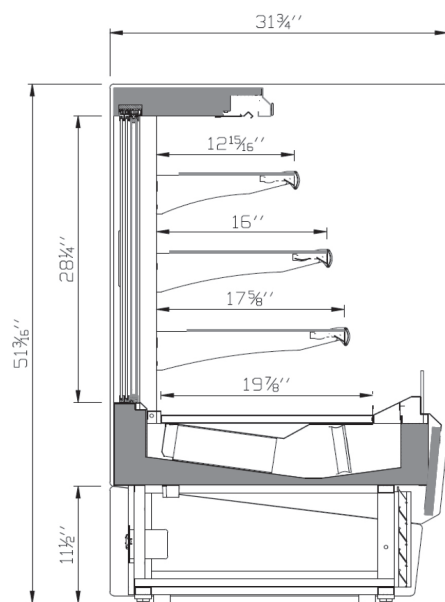

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- AISI 304 Stainless Steel.
- Glass sided panels.
- Heavy duty ball transfer and levelling feet.

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

### Refrigeration:

- Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

- Shelves Lighting
- Evaporation Heaters



# AMBAR INOX SERIES

## Pastry display cases


### VBR FG



PASTRY



PLUG IN



#### AVAILABLE MODELS

VBR9FG

VBR12FG

VBR18FG

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 39°F / 45°F

#### GENERAL DATA

MODEL	VBR9FG	VBR12FG	VBR18FG
LENGTH (in)	37	49 1/5	73 5/6
TOTAL VOLUME (ft³)	9 2/3	12 8/9	19 1/3
TDA (ft²)	14 1/2	19 1/3	29

#### GENERAL DATA

MEASURE (in)	31 3/4 x 51 3/16 x **L (in)
SHELVES (in)	12 15/16 · 16 · 17 5/8
N° SHELVES	3
EXPOSITION DECK (in)	19 7/8
SIDE PANEL THICKNESS (in)	1 1/6

#### STANDAR FEATURES

##### Exterior:

- AISI 304 Stainless Steel.
- Glass sided panels.
- Heavy duty ball transfer and levelling feet.

##### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

##### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

##### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.

##### Refrigeration:

- Digital temperature controller with automatic defrost system.

#### OPTIONAL EQUIPMENT

- Shelves Lighting
- Evaporation Heaters

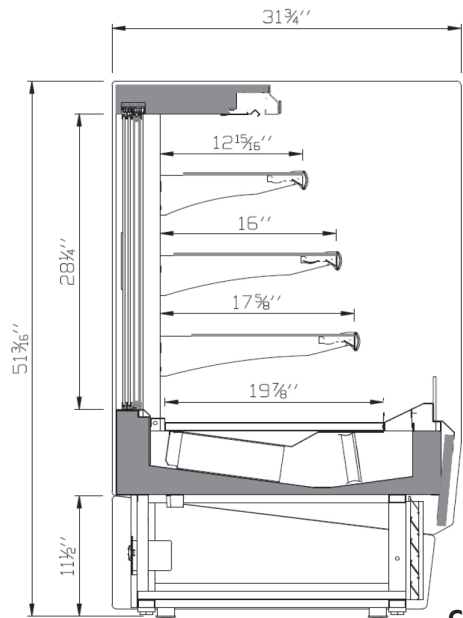

COMMERCIAL SECTION

# AMBAR SERIES

Pastry hot display case

VBR PHT



PLUG IN



HOT · PASTRY



## AVAILABLE MODELS

VBR9PHT

VBR12PHT

VBR18PHT

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz


**PRODUCT TEMP:** 131°F / 140°F

## GENERAL DATA

MODEL	VBR9PHT	VBR12PHT	VBR18PHT
LENGTH (in)	38 1/2	50 4/5	75 2/5
USEABLE VOLUME (ft³)	5 1/2	7 2/7	11
TDA (ft²)	14 1/2	19 1/3	29

## GENERAL DATA

MEASURE (in)	31 3/4 x 51 3/16 x **L (in)
SHELVES (in)	14 3/4 · 14 3/4
N° SHELVES	2
EXPOSITION DECK (in)	19 7/8
SIDE PANEL THICKNESS (in)	—

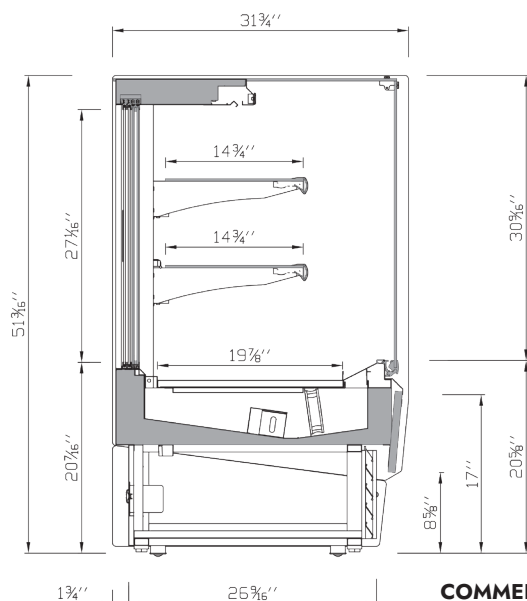

## STANDAR FEATURES

### Exterior:

- Epoxy painted steel sheet
- Glass sided panels
- Adjustable feet

### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Electrical connections is 115 V/ 1ph/ 60 Hz With Nema 5P20 Plug.

### Control:

- Digital temperature controller.
- Forced hot air movement.



## AMBAR SERIES

Food hot display case Grab & Go  
VBR PC



### WARM HOLDING CASE

HOT



### AVAILABLE MODELS

VBR9PC

VBR12PC

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**PRODUCT TEMP:** 149°F / 158°F

Hot air recirculation and heaters in each shelf to ensure the right temperature of the packaged product regardless of his size or shape.

### GENERAL DATA

MODEL	VBR9PC	VBR12PC
LENGTH (in)	37	49 1/5
USEABLE VOLUME (ft³)	5 1/2	7 2/7
TDA (ft²)	14 1/2	19 1/3

### GENERAL DATA

MEASURE (in)	31 3/4 x 51 23/64 x **L (in)
SHELVES (in)	14 19/64 · 14 19/64
N° SHELVES	2
EXPOSITION DECK (in)	19 31/32
SIDE PANEL THICKNESS (in)	—

### STANDAR FEATURES

#### Exterior:

- Epoxy painted steel sheet
- Glass sided panels
- Adjustable feet

#### Interior:

- AISI 304 Stainless Steel.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves

#### Insulation:


- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

#### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Electrical connections is 220 V/ 1ph/ 60 Hz NEMA 6P20 and 220 V/ 3ph/ 60 Hz NEMA 6P20

#### Control:

- Digital temperature controller.
- Forced hot air movement.

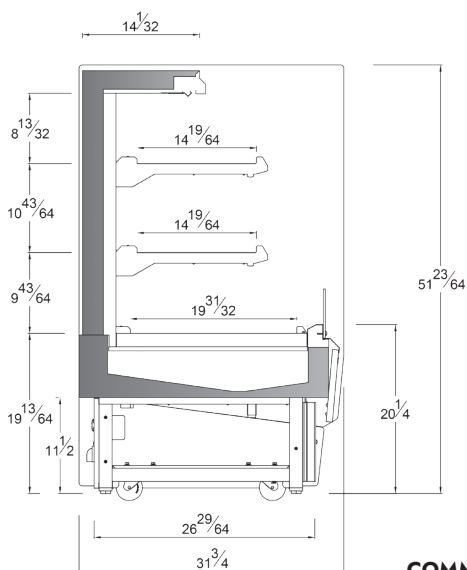

COMMERCIAL SECTION



# COMBO

VCO · Combo range display case for bakery



**DUAL SERVICE DISPLAY CASE:**




**NEUTRAL UPPER PART FOR THE  
DISPLAY AND SALE OF NEUTRAL  
BAKERY PRODUCT.**



**BOTTOM PART FOR SELF-SERVICE  
REFRIGERATED PRODUCT SALES.**



**THE PERFECT MIX FOR CROSS-  
SELLING IN YOUR SALES AREA.**

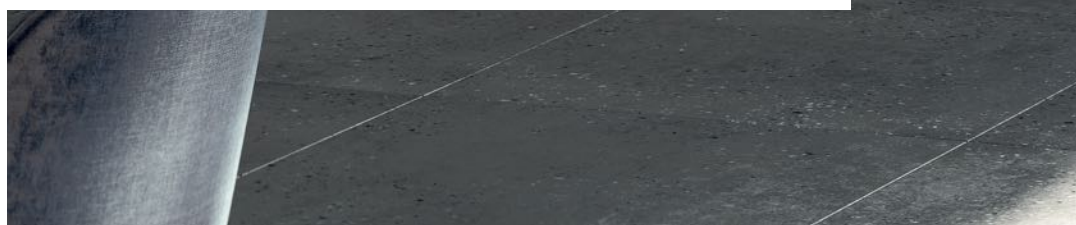





infrico


# COMBO SERIES

Combo range display case for bakery  
VCO



PLUG IN

FOR



## AVAILABLE MODELS

VCO9

VCO12

VCO15

VCO18

**ELECTRICAL DATA:** 115 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290


**PRODUCT TEMP:** 39°F / 45°F

## GENERAL DATA

MODEL	VCO9	VCO12	VCO15	VCO18
LENGTH (in)	37	49 1/5	61 1/2	73 5/6
TOTAL VOLUME (ft³)	6 1/7	6 4/7	8 1/5	9 6/7
TDA (ft²)	17 1/4	23	28 3/4	34 1/2

## GENERAL DATA

MEASURE (in)	34 59/64 x 57 11/64 x **L (in)
SHELVES (in)	12 3/64
N° SHELVES	1
EXPOSITION DECK (in)	22 49/64
SIDE PANEL THICKNESS (in)	1 1/6

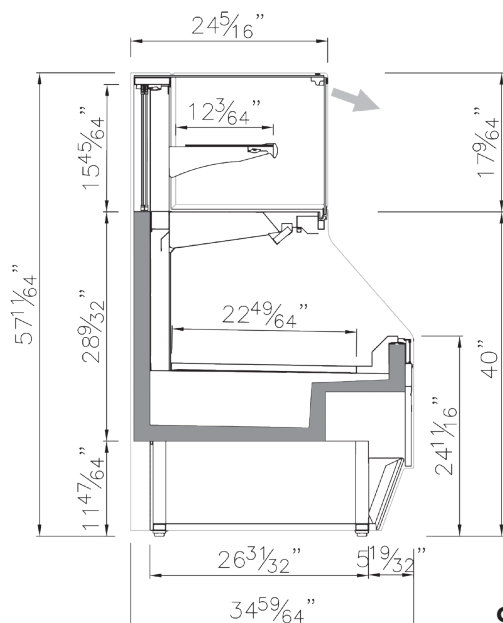

COMMERCIAL SECTION

## STANDAR FEATURES

### Exterior:

- Sides & decoration in water-resistant.
- Glass sided panels.
- Heavy duty ball transfer and levelling feet.

### Interior:

- Low consumption LED lighting.
- Stainless Steel internal panel perforated.
- Inclination and height adjustable shelves.

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- NTC temperature probes encapsulated and sealed.
- Effective way to visualize temperature and monitor all processes through A digital screen.

### Refrigeration:

- Digital temperature controller with automatic defrost system.
- Constant circulation of air for prevent the acumulation of heat in the housing of the unit.







# ARIES

VARH · Gelatto display counter

# CORAL

VCB · Gelatto display counter



Two different designs, with straight and curved glass, to integrate into all sales areas.




Freezing design with two completely independent circuits. The first prevents frost accumulation on the ice cream and the second produces a temperature drop with uniform temperatures.



Tested under demanding environmental conditions to provide the best performance in all environmental conditions.



Display counter for the sale of icecream in traditional assisted service.

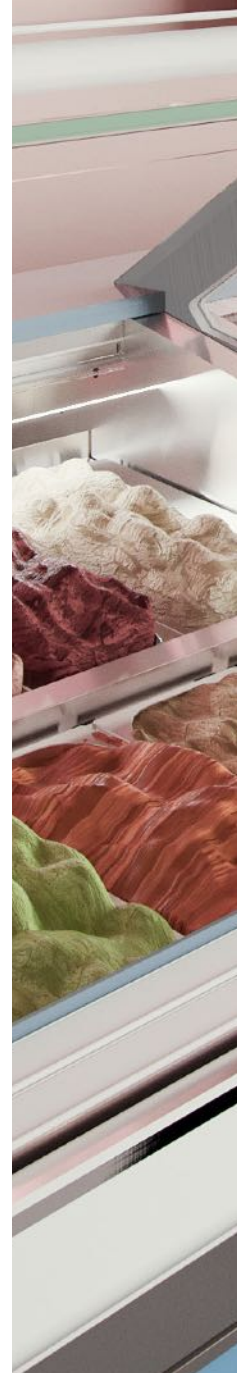





**Infrico**

# ARIES SERIES

Gelatto display counter

VARH



GELATTO



PLUG IN



## AVAILABLE MODELS

VAR12H

VAR15H

VAR18H

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 0°F / 5°F

## GENERAL DATA

MODEL	VAR12H	VAR15H	VAR18H
LENGTH (in)	41 1/5	61 1/2	73 5/6
TOTAL VOLUME (ft³)	6 3/7	8	9 2/3
TDA (ft²)	9 1/7	11 2/5	13 2/3

## GENERAL DATA

MEASURE (in)	45 x 51 1/2 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	—
SIDE PANEL THICKNESS (in)	1 1/6

## STANDAR FEATURES

### Exterior:

- Laminated sheet.
- Worktop in compac Quartz White
- Sides and decoration in water-resistand MDF

### Interior:

- AISI 304 Stainless Steel.
- Low consumption LED Lighting
- Rear nighth curtain

### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

### Electrical and electronic controllers:

- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

### Refrigeration:


Digital temperature controller with automatic defrost system.

## OPTIONAL EQUIPMENT

Tray combination (14 1/6 x 6 1/2 x 6)

Tray combination (14 1/6 x 9 5/6 x 3 1/7)

SECCION VAR H+ UL

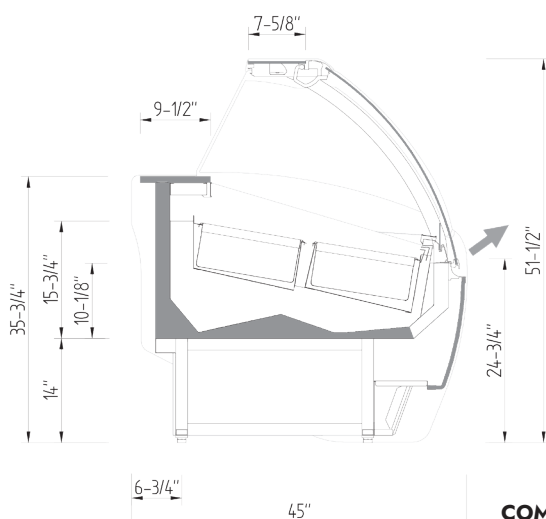

COMMERCIAL SECTION



# CORAL SERIES

## Gelatto display counter

### VCBUH



#### PLUG IN

GELATTO



#### AVAILABLE MODELS

VCB12UH

VCB15UH

VCB18UH

**ELECTRICAL DATA:** 220 V / 1Ph / 60 Hz

**REFRIGERANT CONNECTION:** R-290

**PRODUCT TEMP:** 0°F / 5°F

#### GENERAL DATA

MODEL	VCB12UH	VCB15UH	VCB18UH
LENGTH (in)	49 1/5	61 1/2	73 5/6
TOTAL VOLUME (ft³)	6 3/7	8	9 2/3
TDA (ft²)	9 1/7	11 2/5	13 2/3

#### GENERAL DATA

MEASURE (in)	41 3/8 x 47 3/16 x **L (in)
SHELVES (in)	—
N° SHELVES	—
EXPOSITION DECK (in)	—
SIDE PANEL THICKNESS (in)	4/5

#### STANDAR FEATURES

##### Exterior:

- Laminated sheet.
- Worktop in compac Quartz White
- Sides and decoration in water-resistand MDF

##### Interior:

- AISI 304 Stainless Steel.
- Low consumption LED Lighting
- Rear nigh curtain

##### Insulation:

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.

##### Electrical and electronic controllers:


- Remote alarm signals.
- Encapsulated and sealed NTC temperature probes.
- Effective way to visualize temperature.
- Cord and NEMA 6-20P plug. Electrical connections is 220V/ 1ph/ 60 Hz

##### Refrigeration:

- Digital temperature controller with automatic defrost system.

#### OPTIONAL EQUIPMENT

- Tray combination (14 1/6 x 6 1/2 x 6)
- Tray combination (14 1/6 x 9 5/6 x 3 1/7))

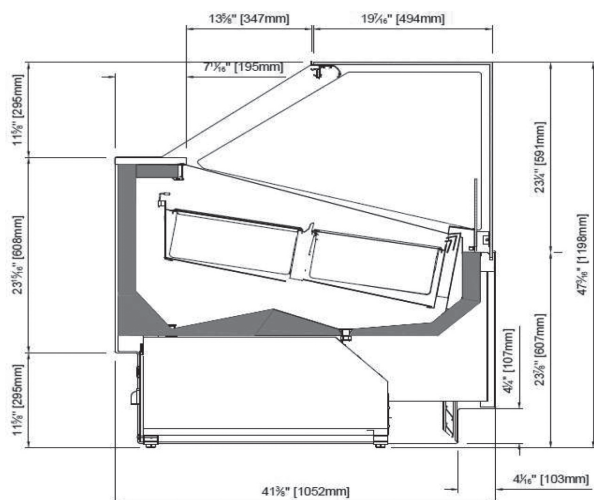

COMMERCIAL SECTION



nosotros te lo preparamos  
Para cualquier encargo  
consulta con nuestro  
personal

Alcampo

Alcampo a favor  
en este momento de servicios-chamarras  
se marcan los alimentos en los  
siguientes lugares:  
Nuestro personal con guantes de látex,  
ropa blanca, mascarilla, guantes, mascarilla, ropa  
limpia, guantes y productos desinfectantes.  
Alcampo








# PHOTO BOOK

A selection of our best national and international facilities

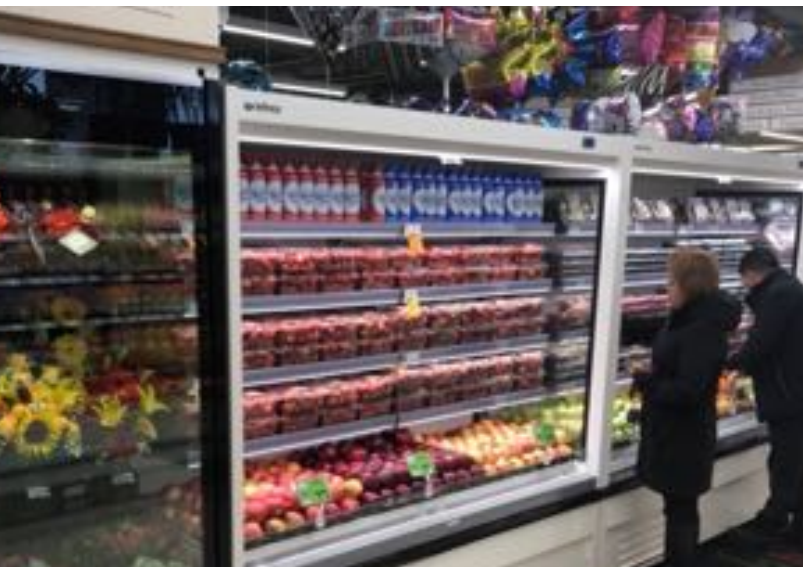





Montevideo - Uruguay



Supermercados Nativo



12.900 Ft<sup>2</sup>












Sevilla - España




Grupo Mas



12.900 Ft<sup>2</sup>

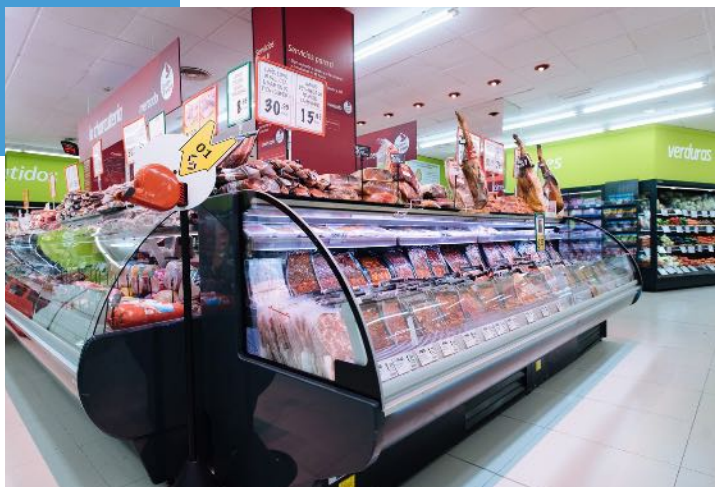



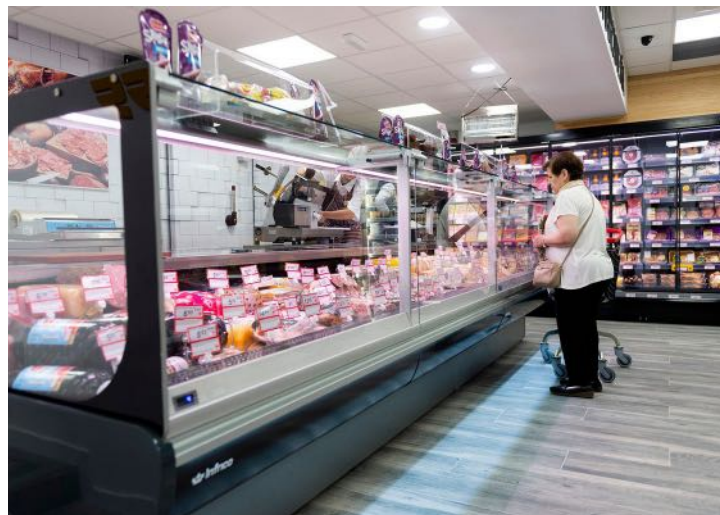



**MR.CHOP**



Sevilla - España




Delicatessen



2.700 Ft<sup>2</sup>





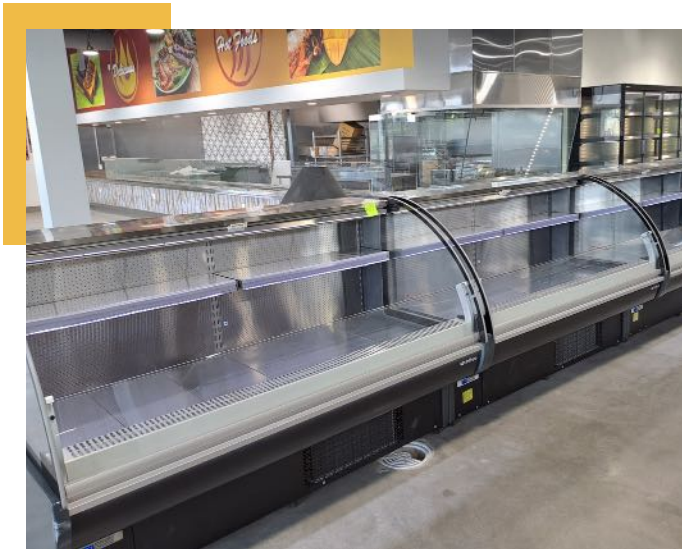





Chicago - USA



Cermak Fresh Market



80.000 Ft<sup>2</sup>



Gala





Wicklow town, Irlanda



Kings Gala



2.700 Ft<sup>2</sup>

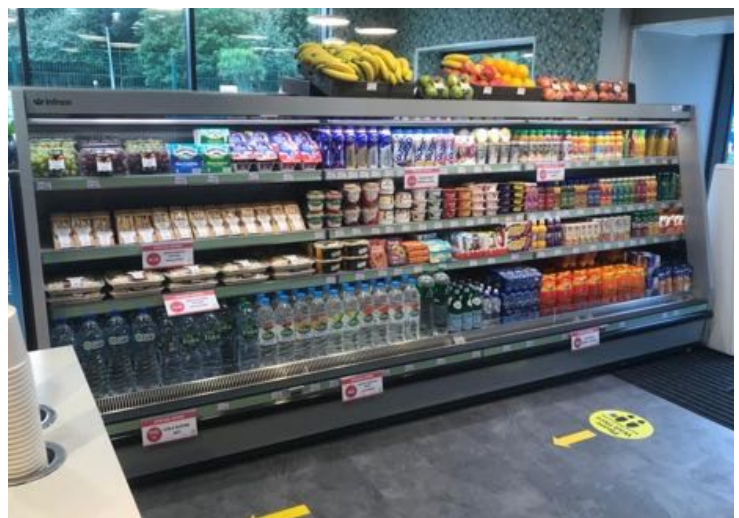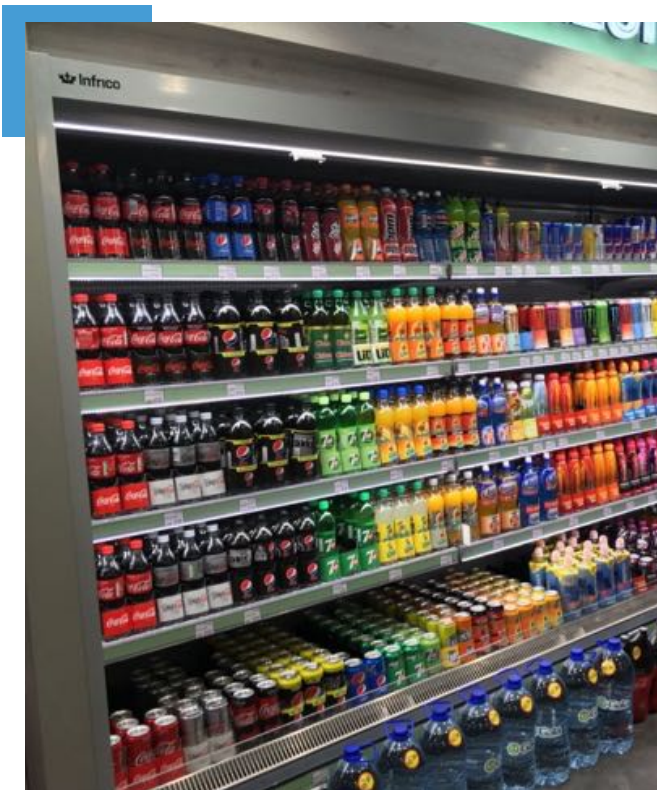





Neiva - Colombia



Supermercados Éxito



80.700 Ft<sup>2</sup>









Glan-Münchweiler, Alemania



Norma Markt



10.700 Ft<sup>2</sup>

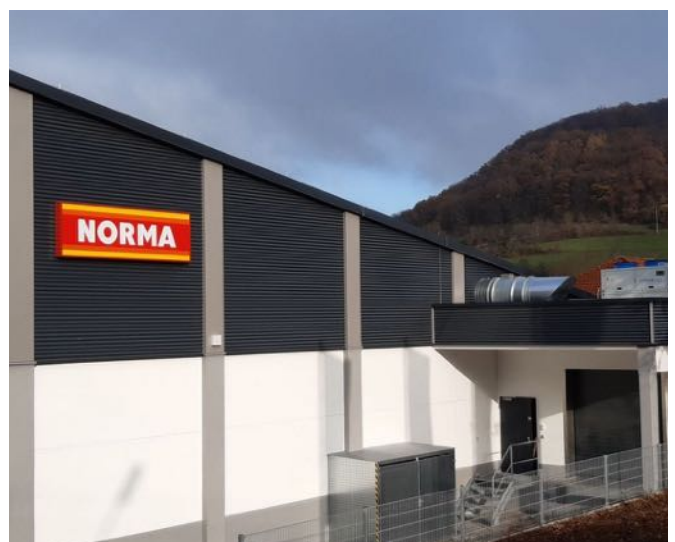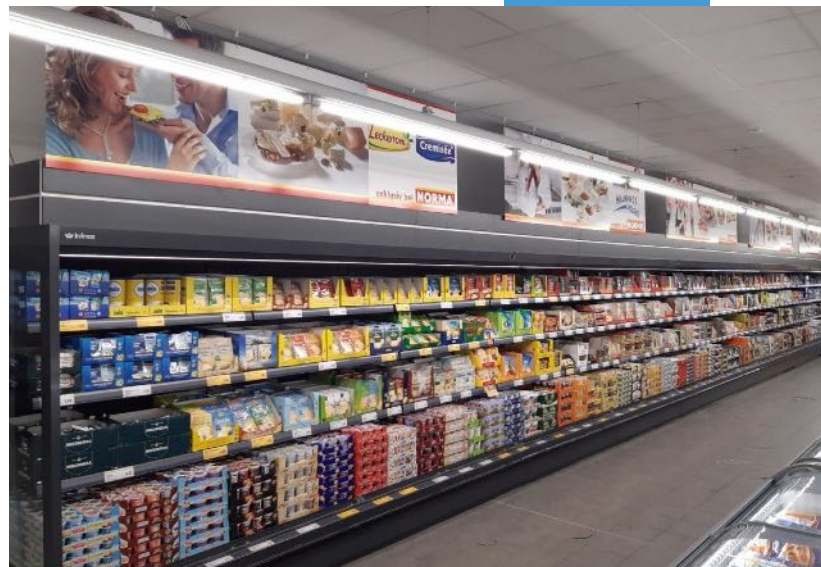

# CUSTOMER SERVICE

FOR ORIGINAL FACTORY  
PARTS & AUTHORIZED  
SERVICE: 1-855-340-4637

Our technical and customer service team is focused on providing you with the care, knowledge and support you will need with the repair and delivery of spare parts.

[www.infrico.us](http://www.infrico.us)





# Infrico USA Limited warranty

## 2022 INFRICO USA LIMITED WARRANTY INFRICO USA

(further on stated as "INFRICO") warrants to the original purchaser of every new INFRICO refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specific by INFRICO and upon proper installation and start-up in accordance with the instruction packet supplied with each INFRICO unit. INFRICO's obligation under this warranty is limited to the following conditions upon each date of invoice:

Parts ..... Three (3) years  
Labor ..... Three (3) years  
Compressor ..... Six (6) years

All parts covered under this specific above stated warranty that are determined as failures by INFRICO, are limited to the repair or replacement, including labor charges of defective parts or assemblies.

## WARRANTY CLAIM PROCEDURE

All claims for labor or parts must be made directly through INFRICO. All claims should include model number of the unit, the serial number of the cabinet, proof of purchase, and all pertinent information supporting the existence of the alleged defect. Warranty starts the day of shipment.

Based on the reported case, INFRICO will program the service attention either by sending an authorized technician to the place indicated by the Customer in order to solve the situation or will send the necessary spare parts for its repair.

This contract does not apply outside the limits of the USA and CANADA. Nor does it apply to any part which has been subject to misuse, neglect, alteration, accident or to any damage caused by transportation, flood, fire, or the acts of God. This contract is not effective unless the INFRICO Warranty Claim Card, furnished to the distributor, is properly filled out and mailed to [service@infrico.com](mailto:service@infrico.com) within 24 HOURS from the date of delivery. The term "Original Purchaser" as used herein shall be deemed to refer to that person, firm, association, or company for whom the refrigeration unit refers to herein is originally installed.

## WHAT IS NOT COVERED BY THIS WARRANTY

INFRICO's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty.

## No consequential damages:

INFRICO is not responsible for economic loss; profit loss or special indirect or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account of refrigeration failure.

## Warranty is not transferable:

This warranty is not assignable and applies only in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose.

## Improper use:

INFRICO assumes no liability for parts or labor coverage for component failure or other damages resulting from improper usage or installation or failure to clean and/or maintain product as set forth in the warranty packet provided with the unit.

## Alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, acts of God:

INFRICO is not responsible for the repair or replacement of any parts that INFRICO determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, act of God or improper electrical connections. INFRICO is not responsible for the repair or replacement of failed or damaged components resulting from electrical power failure, the use of extension cords, low voltage, or voltage drops to the unit.

## No implied warranty of merchantability or fitness for a particular purpose:

There aren't any other warranties expressed, implied or statutory, except the warranties as described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.

## Outside USA & CANADA:

This warranty does not apply to, and INFRICO is not responsible for, any warranty claims made on products sold or used outside the United States of America and Canada.

# NOTES



We make **SHOPPING** easier











WE MAKE  
**SHOPPING**  
*easier*





## DEPARTMENTS

### Sales

[sales@infrico.com](mailto:sales@infrico.com)  
305-777-9599 x700

### Marketing Department

[marketingusa@infrico.com](mailto:marketingusa@infrico.com)  
305-777-9599 x702

### National Service Department

[service@infrico.com](mailto:service@infrico.com)  
305-777-9599 x701

### Parts & Logistics Department

[logistics@infrico.com](mailto:logistics@infrico.com)  
305-777-9599 x704

### Customer Service Support

[customerservice@infrico.com](mailto:customerservice@infrico.com)  
305-777-9599 x702

### NORTH AMERICA CORPORATE DIVISION

INFRICO USA CORP 11200 NW 25  
TH STREET, Sweetwater FL 33172  
855.340.4637 F: 305.777.9598



USA

   InfricoUSA