4. Undercounters & Worktops

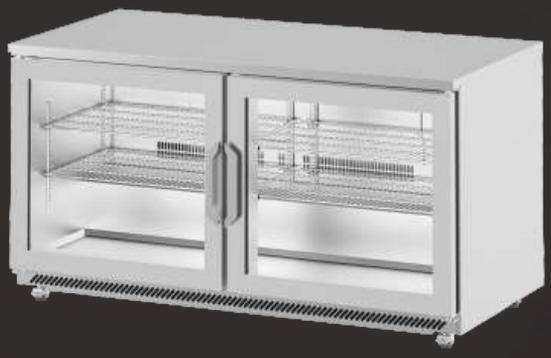

Undercounter Refrigerators and Freezers

Models	Description	Page
IUC-UC27R	1 Solid Door Refrigerator - 8 ft³	48
IUC-UC36R	2 Solid Door Refrigerator - 11 ft³	48
IUC-UC48R	2 Solid Door Refrigerator - 14 ft³	48
IUC-UC60R	2 Solid Door Refrigerator - 17 ft³	48
IUC-UC72R	3 Solid Door Refrigerator - 21 ft³	48
IUC-UC27RCR	1 Glass Door Refrigerator - 8 ft³	48
IUC-UC36RCR	2 Glass Door Refrigerator - 11 ft³	48
IUC-UC48RCR	2 Glass Door Refrigerator - 14 ft³	48
IUC-UC60RCR	2 Glass Door Refrigerator - 17 ft³	48
IUC-UC72RCR	3 Glass Door Refrigerator - 21 ft³	48
IUC-UC27F	1 Solid Door Freezer - 8 ft³	48
IUC-UC36F	2 Solid Door Freezer - 11 ft³	48
IUC-UC48F	2 Solid Door Freezer - 14 ft³	48
IUC-UC60F	2 Solid Door Freezer - 17 ft³	48

Shallow Depth Worktop Refrigerators and Freezers

Models	Description	Page
IUC-UC27RW	1 Solid Door Refrigerator - 8 ft³	50
IUC-UC36RW	2 Solid Door Refrigerator - 11 ft³	50
IUC-UC48RW	2 Solid Door Refrigerator - 14 ft³	50
IUC-UC60RW	2 Solid Door Refrigerator - 17 ft³	50
IUC-UC72RW	3 Solid Door Refrigerator - 21 ft³	50
IUC-UC27RWCR	1 Glass Door Refrigerator - 8 ft³	50
IUC-UC36RWCR	2 Glass Door Refrigerator - 11 ft³	50
IUC-UC48RWCR	2 Glass Door Refrigerator - 14 ft³	50
IUC-UC60RWCR	2 Glass Door Refrigerator - 17 ft³	50
IUC-UC72RWCR	3 Glass Door Refrigerator - 21 ft³	50
IUC-UC27FW	1 Solid Door Freezer - 8 ft³	50
IUC-UC36FW	2 Solid Door Freezer - 11 ft³	50
IUC-UC48FW	2 Solid Door Freezer - 14 ft³	50
IUC-UC60FW	2 Solid Door Freezer - 17 ft³	50

WorkTop Refrigerators and Freezers

Models	Description	Page
IUC-MR41	1 Solid Door Refrigerator - 7.8 ft³	52
IUC-MR67	2 Solid Door Refrigerator - 17 ft³	52
IUC-MR93	3 Solid Door Refrigerator - 27 ft³	52

Models	Description	Page
IUC-MR41BT	1 Solid Door Freezer - 7.8 ft³	52
IUC-MR67BT	2 Solid Door Freezer - 17 ft³	52

Specifications

Triple chamber snap in door gasket for easy cleaning. AISI 430 Stainless Steel Interior & Exterior cabinet construction. AISI 304 Stainless Steel TopT.



Double handle door

Standard expansion valve in freezers.

Pull-out side mounted condensing unit for easy service.

UC27R CR

UC48R

UC72RCR

Undercounters / Shallow Depth Worktop refrigerators & freezers

Exterior
- AISI 430 stainless steel
- AISI 304 stainless steel top

Interior
- AISI 430 stainless steel

Insulation
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation - Low GWP & Zero ODP effect

Shelving
- (2) Two plastic coated wire shelves per section.

Doors
- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice, (Models F)
- Field reversible doors
- Door opening WxH: 23-1/4"x21-7/8" (UC27F); 19-5/8"x21-7/8" (UC48F); 25-5/8"x21-7/8"(UC60F)

Refrigeration
- Temperature regulated by thermostatic control
- Hot gas defrost, (Models BT, F)
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system

Protected digital Controller, with automatic Defrost.

Each guide supports up to 132 lb.

Omega reinforcement in W and MR models

"4" Blacksplash standard

UC60RW CR

MR93

Worktop refrigerators & freezers

Exterior
- AISI 430 stainless steel
- AISI 304 stainless steel top

Interior
- AISI 430 stainless steel
- Internal drain plug for easy cleaning
- Sealed interior floors and rounded cabinet corners

Insulation
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Shelving
- (2) Two plastic coated wire shelves per section.

Doors
- Polyurethane insulated doors
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice, (Models BT, F)
- Field reversible doors
- Doors locks
- Door opening WxH: 21-5/8" x 20-5/8"

Refrigeration
- Digital temperature controller with automatic defrost system
- Hot gas defrost, (Models BT)
- Energy-saving non-electric condensate pan
- Extractable condensing unit for easy service
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- 100°F ambient

Protected digital Controller, with automatic Defrost



Divider bars are available for varyng size pan distribution

Optional divider bar (cod: 10UC27134)



Optional divider bar (cod: 10UC2749)

MOD.	Overall Dimensions			Doors	(°F)	(ft³)	(HP)	(Amps) 115V	(Lbs)	DOE
IUC-MR41	41-3/8	32-5/8	39	1	33°F / 38°F	7.8	1/4	4.1	362	**Hydrocarbon R-290**
IUC-MR67	67-3/8	32-5/8	39	2	33°F / 38°F	17.0	1/3	4.6	510	**Hydrocarbon R-290**
IUC-MR93	93-1/4	32-5/8	39	3	33°F / 38°F	27.0	1/3	4.6	690	**Hydrocarbon R-290**
IUC-MR41BT	41-3/8	32-5/8	39	1	0°F	7.8	1/2	5.0	370	**Hydrocarbon R-290**
IUC-MR67BT	67-3/8	32-5/8	39	2	0°F	17.0	3/4	7.0	510	**Hydrocarbon R-290**

Height already includes 7-7/8" for casters

WorkTop Freezers

MR Series

IUC-MR67BT

MR41BT

STANDARD FEATURES

ELECTRICAL DOE	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug
OPTIONS Cap.10 [Accessories & parts]	Stainless Steel wire shelves Drawer kit Single Overshelf	Double Overshelf 4" Whithout Backsplash Granite Top