



NUMBER	DTI-19608UL
MODEL	VRP
EDITION	0
DATE	02/08/2019
VERSION	00



MODEL

VRP

MODULES


Edition : 0 Date: 02/08/2019

Code : DTI-19608UL

version: 00

In accordance with:
UL471 and NSF7

SIDES

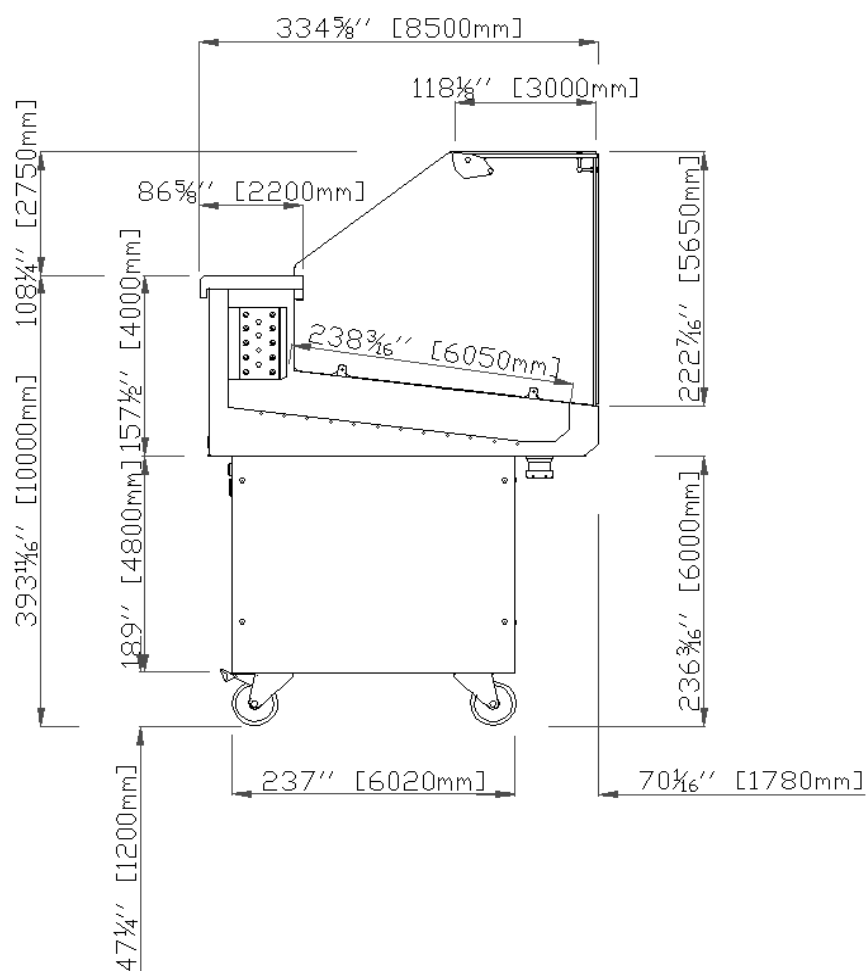

MERCHANDISING DATA

MODELS

VRP13

Length (with sides included)	in	52
	mm	1320
Refrigerated area	Ft ²	8
	m ²	0,75
Useful volume	Ft ³	4
	Lts	115
TDA - Total Display Area	Ft ²	6 1/2
	m ²	0,60
Nº of shelves		-
Control		DIGITAL
Weight	Lbs	379
	Kg	172
Packaging dimensions	in	56 2/7 x
		51 4/7 x
		41 1/3
	mm	1430 x 1310 x 1050

Volts / Frequency
115v / 60Hz.

NOISE LEVEL
63dB

REFRIGERANT
R290a

MODEL
VRP

REFRIGERATION DATA - REGULATION AND CONTROL

INTERIOR TEMPERATURE	SET	-1 °C	30 °F
	DIFFERENCIAL	3	
DEFROST TYPE		NATURAL	
Nº DEFROST / DAY			
MAXIMUM DEFROST TIME			
END DEFROST TEMPERATURE		0 °C	32 °F
MINIMUM DEFROST TIME			

In accordance with:	UL471 and NSF7
---------------------	----------------

Room Temperature	Relative humidity	Climate class
+ 30 °C 86 °F	55 %	4

TEMPERATURE CLASSIFICATION



	Climate class	4
PRODUCT TEMPERATURE	-1 °C	30,2 °F
MEDIUM PRODUCT TEMPERATURE	0 °C	32 °F
EVAPORATION	STATIC	
CONDENSATION	VENTILATED	
EVAPORATION TRAY	-	

INSTALLATION BASE FURNITURE DATA

			MODEL
			VRP13
COMPRESSOR	Nº		1
	W		233
	A		1,4
REFRIGERANT			R290a
	gr		90
EVAPORATOR FANS	Nº		-
	W		-
	A		-
CONDENSER FANS	Nº		1
	W		7,8
	A		0,07
ANTI FOG RESISTANCE	W		-
	A		-
CANOPY LIGHTING	LED	W	12
		A	0,10
POWER		W	252,8
		A	1,57
CONSUMPTION		kWh/24h	3,54

LEGS, WHEELS, DRAINS, ELECTRIC BOX

MODEL
VRP

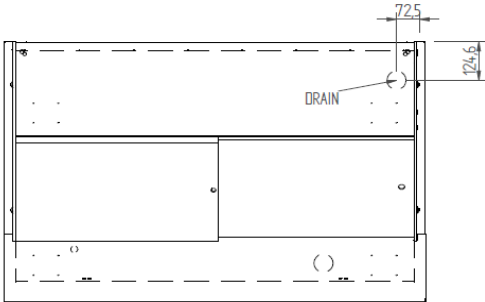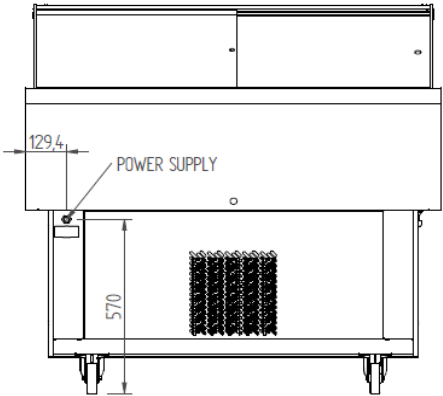

	A		B		C		D	
	in	mm	in	mm	in	mm	in	mm
VVL12	5	129,4	22 4/9	570	2 6/7	72,5	5	124,6