




Model:

VCO STARBUCKS CASE

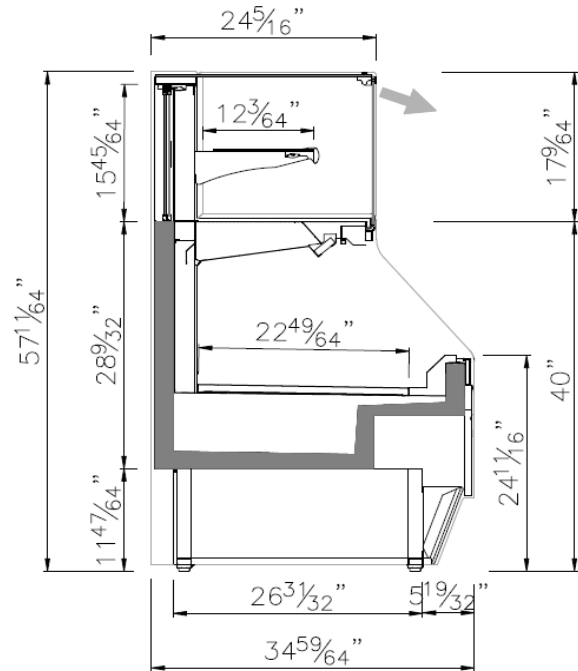

ESTANDAR FEATURES



EXTERIOR

- ⊗ Sides & decoration in water-resistant.
- ⊗ Glass sided panels.
- ⊗ Heavy duty ball transfer and levelling feet.
- ⊗ Enamelled steel base.
- ⊗ Modulaire line.



INTERIOR

- ⊗ Low consumption LED lighting.
- ⊗ Stainless Steel internal panel perforated.
- ⊗ Inclination and height adjustable shelves.
- ⊗ Front and shelves 40 mm price ticket rail.
- ⊗ LED lighting in canopy and under each shelf.



INSULATION

- ⊗ CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- ⊗ Low GWP & Zero ODP effect.



ELECTRICAL AND ELECTRONIC CONTROLLERS

- ⊗ Remote alarm signals.
- ⊗ NTC temperature probes encapsulated and sealed.
- ⊗ Effective way to visualize temperature and monitor all processes through A digital screen.
- ⊗ Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz (digital control).



REFRIGERATION

- ⊗ Digital temperature controller with automatic defrost system.
- ⊗ Ventilated condensation system.
- ⊗ Constant circulation of air for prevent the acumulation of heat in the housing of the unit.

GENERAL DATA


	MODEL			
	VCO9	VCO12	VCO15	VCO18
LENGTH (in)	37	49 1/5	61 1/2	73 5/6
SIDE PANEL THICKNESS (in)	1 1/6			
TOTAL VOLUME (Ft ³)	10	13 1/2	16 4/5	20 1/5
TDA - AREA TOTAL DISPLAY (Ft ²)	17 1/4	23	28 3/4	34 1/2
UNIT WEIGHT (lb)	507	578	672	772
CREATED DIMENSIONS (in)	43 x 39 x 67	55 1/2 x 39 x 67	68 1/9 x 39 x 67	80 x 39 x 67

INSTALLATION DETAILS

DATA TABLE

MODEL	VCO9	VCO12	VCO15	VCO18
A (in)	9 5/6	9 5/6	9 5/6	9 5/6
B (in)	11 2/9	11 2/9	11 2/9	11 2/9
C (in)	13 8/9	13 8/9	13 8/9	13 8/9
D (in)	19 3/5	19 3/5	19 3/5	19 3/5

FOOT | WHEELS POSITION

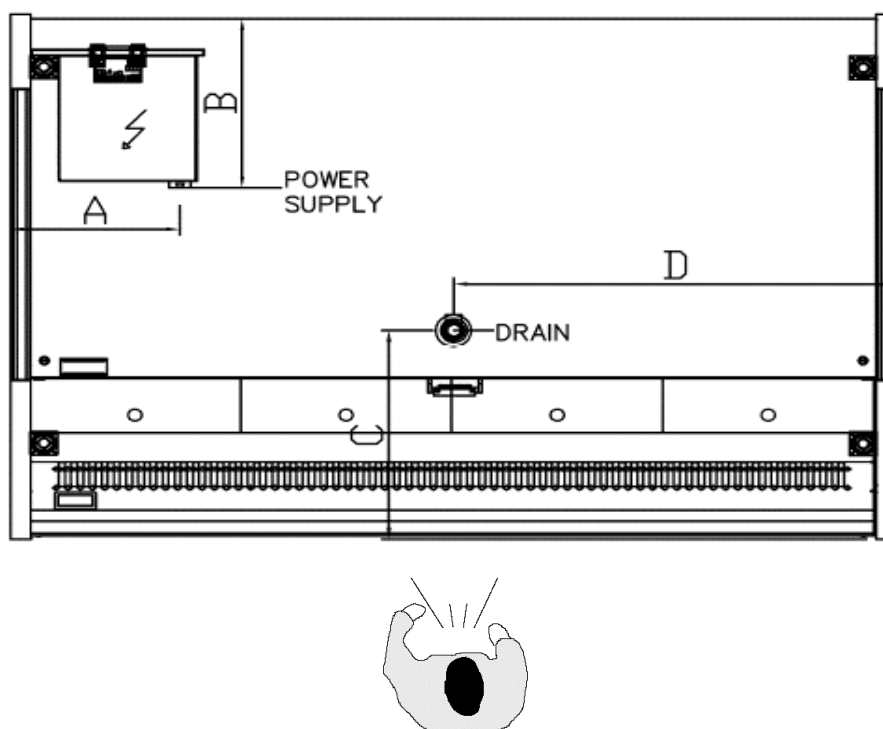

TECHNICAL CONFIGURATION

		MEDIUM TEMPERATURE [30°F/45°F]
INTERIOR TEMPERATURE	SET POINT	35°F
	DIFFERENTIAL	2
DEFROST TYPE		HOT GAS
N° DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		46°F
MAXIMUM DEFROSTING TIME		30'

In compliance with UL471 and NSF7

Ambient Temp.	Humidity
+75 °F	55 %

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION	-

VOLTAGE	115V/60Hz
SOUND LEVEL	≤70 dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL			
		VCO9	VCO12	VCO15	VCO18
COMPRESSOR	N°	1	1	1	1
	V/Hz	115/60	115/60	115/60	115/60
	Btu/h	4281	6083	5988	6651
	W	609	708	879	1092
	hp	1/3	3/4	1/2	3/4
REFRIGERANT	A	6,88	6,88	8,44	10,92
	Type	R290			
	lb	0,26	0,29	0,33	0,33
COIL FANS	N°	1	2	2	2
	V/Hz	115/60	115/60	115/60	115/60
	W	4,8	4,8	4,8	4,8
	A	0,04	0,04	0,04	0,04
CONDESATOR FANS	N°	2	2	2	2
	V/Hz	115/60	115/60	115/60	115/60
	W	11,0	11,0	11,0	11,0
	A	0,43	0,43	0,43	0,43
LIGHTING LED	W	27	36	45	54
	A	0,23	0,31	0,39	0,47
DRAIN RESISTANCE	W	450	450	450	450
	A	3,91	3,91	3,91	3,91
TOTAL AMPERES	115 V	A	11,92	12,04	13,67
		W	1113	1226	1406
TOTAL CONSUMPTION	kWh/24h	17,4	19,1	21,9	25,4
MCA/MOP	MCA	14,60	14,65	16,60	19,70
	MOP	20,28	20,32	23,83	29,41