




Model:
VEG U SERIES
SELF CONTAINED



ESTANDAR FEATURES

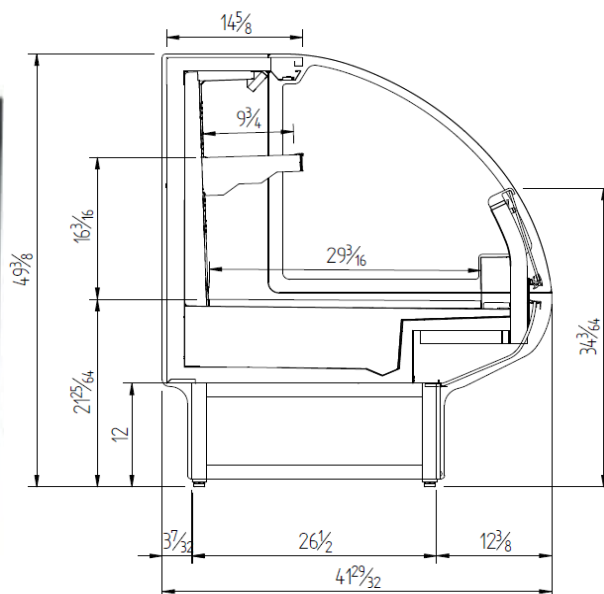

EXTERIOR

- ⊗ AISI 304 Stainless Steel.
- ⊗ Glass sided panels.
- ⊗ Heavy duty ball transfer and levelling feet.
- ⊗ Enamelled steel base.
- ⊗ Modulaire line.
- ⊗ Doors with double glass without serigraphy that provide low heat transmission.



INTERIOR

- ⊗ AISI 304 Stainless Steel.
- ⊗ Stainless Steel internal panel perforated.
- ⊗ Inclination and height adjustable shelves.
- ⊗ Front and shelves 40 mm price ticket rail.
- ⊗ LED lighting in canopy and under each shelf.



INSULATION

- ⊗ CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- ⊗ Low GWP & Zero ODP effect.



ELECTRICAL AND ELECTRONIC CONTROLLERS

- ⊗ Remote alarm signals.
- ⊗ NTC temperature probes encapsulated and sealed.
- ⊗ Effective way to visualize temperature
- ⊗ Cord and NEMA 5-20P plug. Electrical connections is 115V/ 1ph/ 60 Hz (digital control).



REFRIGERATION

- ⊗ Digital temperature controller with automatic defrost system.
- ⊗ Ventilated condensation system.
- ⊗ Constant circulation of air for prevent the acumulation of heat in the housing ot the unit.

GENERAL DATA



	MODEL			
	VEG09U	VEG12U	VEG15U	VEG18U
LENGTH (in)	37	49 1/5	61 1/2	73 5/6
SIDE PANEL THICKNESS (in)	1 1/6			
TOTAL VOLUME (Ft ³) VBR_IR	14 1/2	19 1/3	24 1/6	29
TDA - AREA TOTAL DISPLAY (Ft ²)	9	12	15	18
UNIT WEIGHT (lb)	419	485	529	606
CREATED DIMENSIONS (in)	44 2/7 x 55 1/3 x 43 1/3	44 2/7 x 55 1/3 x 52 3/4	44 2/7 x 55 1/3 x 67 5/7	44 2/7 x 55 1/3 x 80

INSTALLATION DETAILS

DATA TABLE

MODEL	VEG09U	VEG12U	VEG15U	VEG18U
A (in)	7	7	7	7
B (in)	23 2/9	23 2/9	23 2/9	23 2/9
C (in)	5 1/2	5 1/2	5 1/2	5 1/2

FOOT | WHEELS POSITION

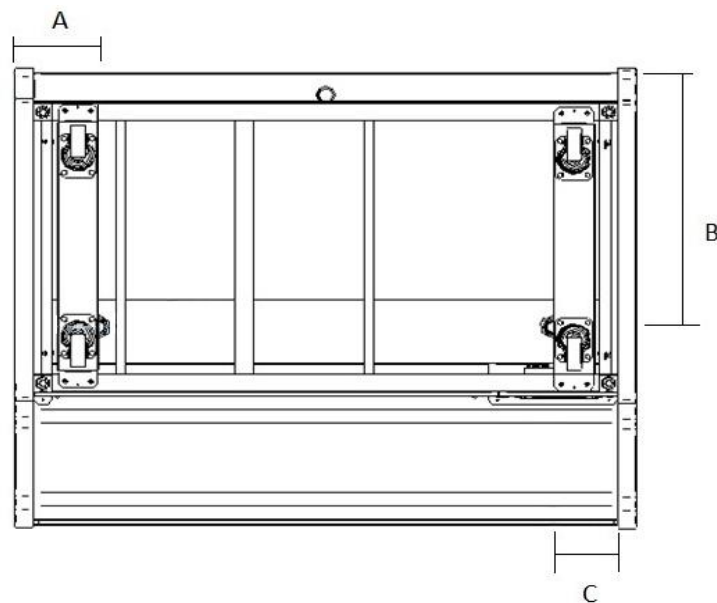

TECHNICAL CONFIGURATION

INTERIOR TEMPERATURE	SET POINT	MEDIUM TEMPERATURE [30°F/45°F] 32°F
	DIFFERENTIAL	3
DEFROST TYPE	NATURAL	
N° DEFROSTS / 24h	4	
END OF DEFROSTING TEMPERATURE	46°F	
MAXIMUM DEFROSTING TIME	15'	

In compliance with UL471 and NSF7

Ambient Temp.	Humidity
+75 °F	55 %

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX

VOLTAGE	115V/60Hz
SOUND LEVEL	≤70 dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL				
		VEG09U	VEG12U	VEG15U	VEG18U	
COMPRESSOR	N°	1	1	1	2	
	V/Hz	115/60	115/60	115/60	115/60	
	Btu/h	3557	5033	4917	6651	
	W	562	649	789	1092	
	hp	1	1	1	1 1/2	
	A	6,64	6,64	7,65	10,92	
REFRIGERANT	Type	R290				
	lb	0,20	0,29	0,32	0,33	
COIL FANS	N°	1	2	2	3	
	V/Hz	115/60	115/60	115/60	115/61	
	W	4,8	4,8	4,8	4,8	
	A	0,04	0,04	0,04	0,04	
CONDESATOR FANS	N°	1	2	2	3	
	V/Hz	115/60	115/60	115/60	115/61	
	W	11,0	11,0	11,0	11,0	
	A	0,43	0,43	0,43	0,43	
LIGHTING LED	W	14	18	22	27	
	A	0,12	0,16	0,19	0,23	
TOTAL	115 V	A	7,2	7,7	8,8	
		W	592	699	843	
TOTAL CONSUMPTION		kWh/24h	9,2	10,9	13,1	35,2
MCA/MOP		MCA	8,88	9,46	10,73	29,04
		MOP	15,41	15,87	18,14	36,89