

11. Vitrinas Pastelería Pastry Display Cases

VOLCANES, UNA GRAN FUERZA PRODUCTIVA

Desde enriquecer el suelo hasta la creación de nuevas masas de tierra. Desempeñan un papel vital en el enfriamiento periódicamente fuera del planeta.

Cuando la ceniza volcánica y compuestos como el dióxido de azufre son liberados en la atmósfera, pueden reflejar algunos de los rayos del sol de vuelta al espacio, lo que reduce la cantidad de energía térmica absorbida por la atmósfera.

Este proceso, conocido como "oscurecimiento global", por lo tanto tiene un efecto de enfriamiento en el planeta.

VOLCANOES, A GREAT PRODUCTIVE FORCE

From enriching the soil to the creation of new land masses. They play a vital role in periodically cooling off the planet.

When volcanic ash and compounds such as sulphur dioxide are released into the atmosphere, they reflect some of the sun's rays back into space, which reduces the amount of thermal energy absorbed by the atmosphere.

This process, known as "global dimming", therefore has a cooling effect on the planet.







Vitrina expositora para pastelería

Pastry display case







Vitrina expositora para pastelería

Serie
LYON
Series

CARACTERÍSTICAS TÉCNICAS

Control Digital



Mayor **precisión en el sistema de control de la temperatura y humedad**. Mayor facilidad para el ajuste del intervalo de temperaturas que deseamos conseguir.



Comprobación de fuga de gas

Todos las unidades condensadoras son **comprobados al 100%, en cámara de Helio** para la detección de la fuga de gas.



Iluminación

Incorporación de **iluminación LED**, llegando a **reducir el consumo energético entre un 80% y 90%** Iluminación en todos los niveles y frente para realzar los productos.

TECHNICAL CHARACTERISTICS

Digital control

Higher **precision in managing temperature settings**. Greater ability to adjust of temperature ranges as per the end user's requirement.

Leak detection system

All condenser units are **tested 100%, in helium chambers** to refrigerant leak detections.

Lighting


LED lighting incorporated, **reducing energetic consumption between 80% and 90%** respect to a traditional light bulb.

Estante opcional
Optional shelf

VLY 15



VLY 15

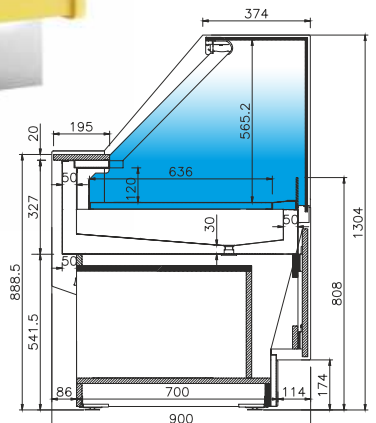

MOD.



Costados
Sides
(mm)



Potencia
Power
(W)



Bandejas
Trays
(300x400)



Bandejas
Trays
(600x400)



Superficie
Exposición
(m²)



Estantes
Shelving



Compresor
Compressor
(HP)



Consumo
Consumption
(kWh/24h)



Potencia
frigorífica
Cooling capacity
(W a -10°C)



Control



Refrigerante
Coolant

MOD.	Costados Sides (mm)	Potencia Power (W)	Bandejas Trays (300x400)	Bandejas Trays (600x400)	Superficie Exposición (m ²)	Estantes Shelving	Compresor Compressor (HP)	Consumo Consumption (kWh/24h)	Potencia frigorífica Cooling capacity (W a -10°C)	Control	Refrigerante Coolant
VLY9	30+30	750	4	2	0,60	1 OPC.	1/4	5,8	298	Digital	R-134a
VLY12	30+30	795	6	3	0,80	1 OPC.	1/3	7	395	Digital	R-134a
VLY15	30+30	870	6	3	1,00	1 OPC.	3/8	8,2	464	Digital	R-134a
VLY18	30+30	920	8	4	1,20	1 OPC.	1/2	9,3	568	Digital	R-134a
VLY25	30+30	1010	12	6	1,60	1 OPC.	5/8	11,2	684	Digital	R-134a



Pastry display case

Serie
LYON
Series

REFRIGERACIÓN



Refrigeración

Sistema de **Condensación Ventilada**.

Desescarche automático.

Bandeja **evaporativa** automática.

REFRIGERATION

Refrigeration system

System of **Ventilated Condensation**.

Automatic **defrost**.

Automatic **evaporative** tray.

VLY 9



MOD.

Puertas correderas traseras
Rear sliding doors

VLY 9	[PUEVLY9CT]
VLY 12	[PUEVLY12CT]
VLY 15	[PUEVLY15CT]

MOD.

Puertas correderas traseras
Rear sliding doors

VLY 18	[PUEVLY18CT]
VLY 25	[PUEVLY25CT]

MOD.

Estante
Shelf

VLY 9	[ESTVCB9]
VLY 12	[ESTVCB12]
VLY 15	[ESTVCB15]
VLY 18	[ESTVCB18]
VLY 25	[ESTVCB25]



VLY 9


938 x 900 x 1305 mm.
Temp. +4°C / +8°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz

Medidas sin costados
Measures without sides




VLY 12

1250 x 900 x 1305 mm.
Temp. +4°C / +8°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz




VLY 15

1562 x 900 x 1305 mm.
Temp. +4°C / +8°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz



VLY 18

1875 x 900 x 1305 mm.
Temp. +4°C / +8°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz



VLY 25

1250 x 900 x 1305 mm.
Temp. +4°C / +8°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz

Fotografías no contractuales / Non contractual pictures.

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.

Los datos técnicos están sujetos a posibles variaciones que serán actualizadas periódicamente en las fichas técnicas del producto, disponibles en la web.

The technical data are subject to possible variations that will be updated periodically in the technical data sheets of the product, which are available on the website.


www.infrico.com



493



Decoración Standard / Standar Decorations

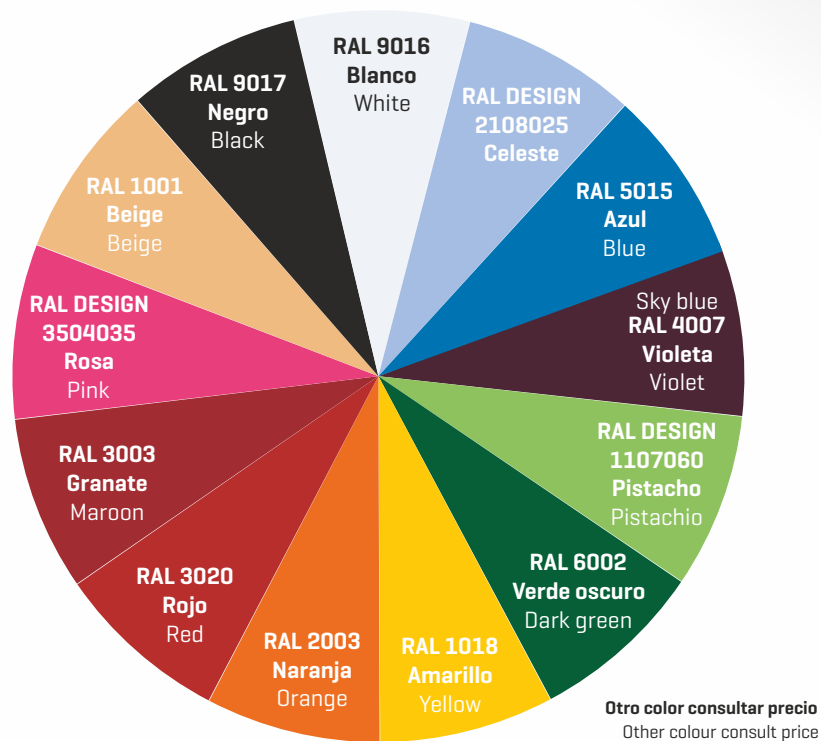

Colores fuera de carta / Colors outside of letter

Color	Tipo Type	Incremento plazo de entrega Increase delivery time	Suplemento PVP [x pedido] PVP supplement [x order]
RAL	Epoxi	+10 días laborables/ Work days	
	Líquida/Liquid	+10 días laborables/ Work days	
NO RAL	Epoxi	Consultar/Consulter	Consultar/Consulter
	Líquida/Liquid	Consultar/Consulter	Consultar/Consulter