

MODELS: SSVSFCG4 SSVSFCG6 **SELF-SERVICE:**
Three levels refrigerated case – without depth.

General Strengths

- ✓ **All condenser units are tested 100%, in helium chambers for refrigerant leak detections.**
- ✓ **Infrico Self-Service has been designed to allow food service in the smallest space possible, or the creation of independent zones depending on the type of food, so the user can freely serve himself without any queue.**
- ✓ **All doors include double chamber door gaskets, easy to remove and snap in.**
- ✓ **Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.**
- ✓ **Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.**
- ✓ **LED lighting and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.**



SSVFCG4

MODELS	Dimensions (mm)			Nº Doors	Nº Trays	Chamber Volume (L)	Gross Volume (L)	Temp. regime (°C)	Ref.	Gas charge (gr.)	Net Weight (Kg.)
	Length	Depth	Height								
SSVSFCG4	1450	730	1262	2	6	676	1334	+4°C / +12°C	R452A	400	910
SSVSFCG6	2200	730	1262	3	9	1059	2024	+4°C / +12°C	R452A	600	152

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: SSVSFCG4 SSVSFCG6 ***SELF-SERVICE:
 Three levels refrigerated case – without depth.***

STANDARD FEATURES

➤ **Exterior**

- AISI 304 Series Stainless Steel.
- Sliding doors on the service side and 4+4 folding doors on the customer side.

➤ **Interior**

- AISI 304 Series Stainless Steel.
- Interior with wide corners unions to facilitate cleaning.
- Three levels without depth.
- LED Lighting.

➤ **Insulation**

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.


➤ **Shelves**

- Includes (3) plastid-coated wire shelves,
- Guides and shelves easy to take off for cleaning.

➤ **Regulation**

- Temperature regulated by a digital controler,
- Automatic defrost,
- System of Ventilated Condensation,
- System of Ventilated Evaporation,
- Evaporative pan in Stainless Steel,
- Evaporator coil coated with anti-corrosion material,
- Climatic class 4 (30°C, 55%RH).

➤ **Electrical**

- Electrical connection: 220 V / 1 ph / 50 Hz. 

OPTIONAL

- Glass shelf.
- Electrical connection 220 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.

Review: 01 Date: 30/08/2018 SSVSFCG4, SSVSFCG6_FT.En.0.1

MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Power (W)	Comp. (HP)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Container 20'/40'/40'HC	Trailer
	Length	Depth	Height								
SSVSFCG4	1550	830	1362	122	920	3/8	1048	13,2	4,0	7 / 15 / 15	24
SSVSFCG6	2300	830	1362	172	1170	5/8	1425	16,8	5,1	7 / 14 / 14	16

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico
 Ctra. de Aguilar A-318 por Moriles km. 15,5 - A-3132.
 14900 Lucena (Córdoba)
 Spain

www.infrico.com
info@infrico.com
 Tel. 00 34 957 51 03 03
 Fax. 00 34 957 51 03 04


APPROVALS: _____

AVAILABLE AT: _____






MODELS: SSVSFCG4 SSVSFCG6 *SELF-SERVICE:
 Three levels refrigerated case - without depth.*


GENERAL VIEW



SSVSFCG4

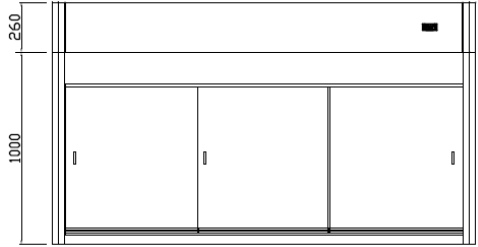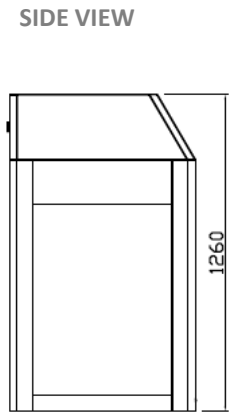


SSVSFCG6

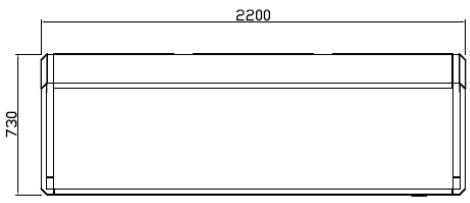

SSVSFCG

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
SSVSFCG4	27	48	-	-	-
SSVSFCG6	27	48	-	-	-

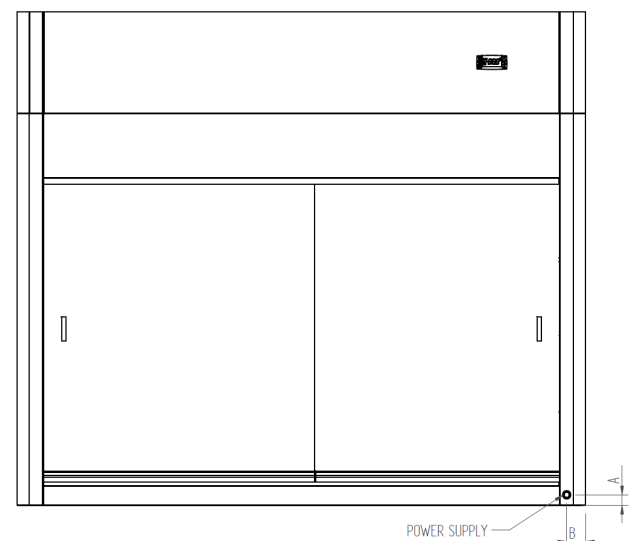

Review: 01 Date: 30/08/2018 SSVSFCG4, SSVSFCG6_FT_En.0.1

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE