

MODELS: VBR6SS	VBR9SS	VBR12SS	VBR18SS	SHOW CASES: Ambar Line – Self Service
-----------------------	---------------	----------------	----------------	--

General Strengths

- ✓ *This modular line is designed for pastry. Apart from standard colours, customers can easily collocate other decorative panels.*
- ✓ *The control systems have a higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.*
- ✓ *All condenser units are tested 100%, in helium chambers to refrigerant leak detections.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*
- ✓ *LED lighting incorporated, reducing energetic consumption. Provides a much better light quality.*



VBR12SS



VBR6SS

MODELS	Dimensions (mm)			Lateral Thickness (mm)	Nº Doors	Nº Shelves	Chamber Volume (L)	Gross Volume (L)	Regimen Temp. (°C)	Ref.	Ref. Weight (gr.)	Net Weight (Kg.)
	Width	Depth	High									
VBR6SS	625	810	1300	20 + 20	-	3	180	660	+4°C / +8°C	R452A	260	160
VBR9SS	938	810	1300	20 + 20	-	3	274	990	+4°C / +8°C	R452A	400	180
VBR12SS	1250	810	1300	20 + 20	-	3	365	1320	+4°C / +8°C	R452A	450	194
VBR18SS	1875	810	1300	20 + 20	-	3	548	1970	+4°C / +8°C	R452A	550	212

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: VBR6SS	VBR9SS	VBR12SS	VBR18SS	SHOW CASES: <i>Ambar Line – Self Service</i>
-----------------------	---------------	----------------	----------------	--

STANDARD FEATURES

➤ Modular line

➤ Exterior

- AISI 304 Series Stainless Steel,
- AISI 304 Series Stainless Steel upper worktop,
- Double lateral glass sides,
- Enamelled steel base,
- Water resistant frontal and decoration DM lacqued,
- Injected back with polyurethane,
- LED lighting frontal decoration,
- Night curtain,

➤ Interior

- Base of enamelled steel tube,
- Exposition surface area and shelves with LED lighting,
- Stainless steel internal panel perforated,
- Profiles in anodized aluminium.
- Night curtain standard and front brackets.

➤ Insulation

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ Refrigeration

- Temperature and defrost regulated by a digital controller.
- Digital control in the front
- System of ventilated condensation.
- System of Forced Evaporation.
- Double stainless steel evaporative pan, first with hot, gas second with electrical resistance,
- Climate class 3 (25°C, 60%HR).

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz



OPTIONAL

- Electrical connection 220 V / 1 ph / 60 Hz,
- Electrical connection 115 V / 1 ph / 60 Hz.


MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Power (W)	Comp. (HP)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Level Noise (dB)	Container 20'/40'/40'HC	Trailer
	Width	Depth	High									
VBR6SS	700	920	1520	185	825	1/3	817	18,2	3,2	56,0	18 / 38 / 38	47
VBR9SS	1020	920	1520	205	1000	1/2	1096	20,0	5,5	57,1	10 / 22 / 44	52
VBR12SS	1320	920	1520	240	1060	3/4	1315	21,2	5,9	58,8	8 / 18 / 36	44
VBR18SS	2080	920	1520	247	1340	1	1840	26,8	6,2	60,4	6 / 12 / 12	14

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE


MODELS: VBR6SS	VBR9SS	VBR12SS	VBR18SS	SHOW CASES: <i>Ambar Line – Self Service</i>
-----------------------	---------------	----------------	----------------	--

PLAN VIEW


FRONT VIEW

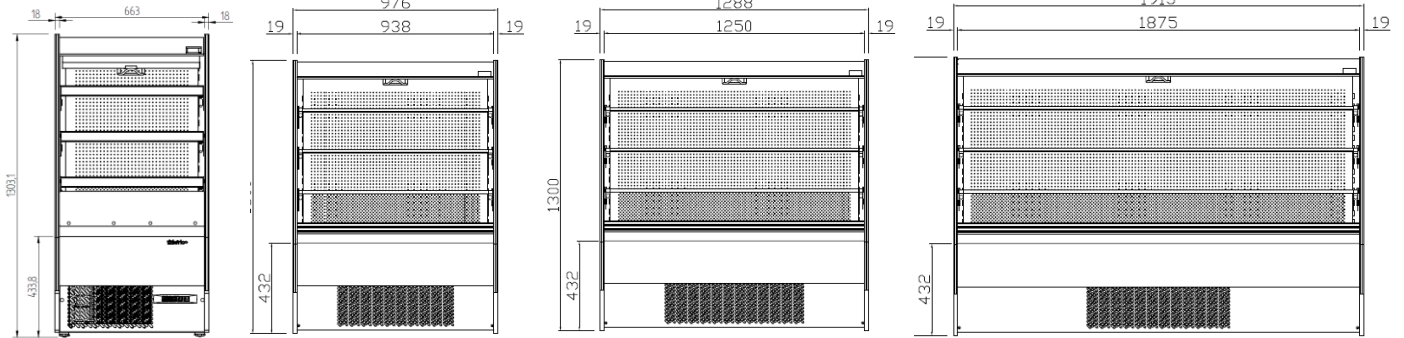

TOP VIEW

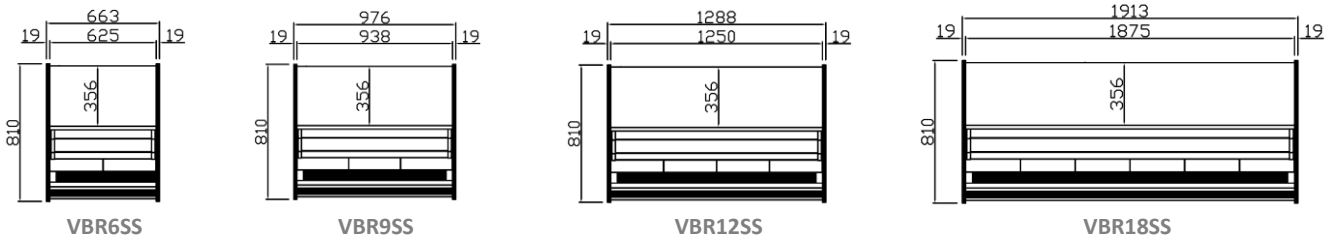


SIDE VIEW

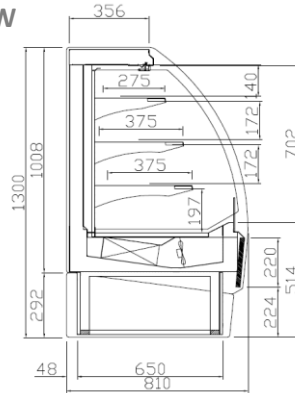

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
VBR6SS	145	486	113	-	-
VBR9SS	145	486	113	-	-
VBR12SS	168	486	220	-	-
VBR18SS	168	486	220	-	-

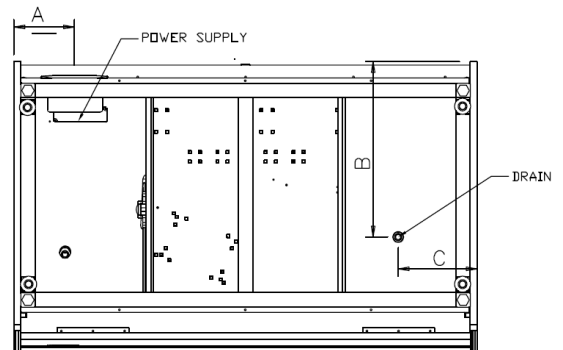

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE