

MODELS: VEB4CP VEB6CP	VEB7CP VEB8CP	VEB9CP	BAR AND DISPLAY EXHIBITOR CASE AND PLATE
--	--------------------------------	---------------	---



VEB4CP



VEB6CP

General Strengths

- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb.

MODELS	Dimensions (mm)			Nº Doors	Surface Exposure (m ²)	Chamber Volume (L)	Gross Volume (L)	Regimen Temp. (°C)	Ref.	Ref. Weight (gr.)	Net Weight (Kg.)
	Length	Depth	Height								
VEB4CP	810	395	195	1	0,23	9,2	62,4	+4°C / +8°C	R134a	180	17
VEB6CP	1162	395	195	1	0,34	13,6	90	+4°C / +8°C	R134a	200	19
VEB7CP	1338	395	195	1	0,40	16,0	100	+4°C / +8°C	R134a	240	21
VEB8CP	1514	395	195	1	0,46	18,4	120	+4°C / +8°C	R134a	220	23
VEB9CP	1690	395	195	1	0,51	20,4	130	+4°C / +8°C	R134a	280	25

MODELS: VEB4CP VEB6CP	VEB7CP VEB8CP	VEB9CP	BAR AND DISPLAY EXHIBITOR CASE AND PLATE
--	--------------------------------	---------------	---

STANDARD FEATURES

➤ Exterior

- Flat glass.

➤ Interior

- Interior of AISI 304 Stainless Steel,
- Illumination LED in the profile superior.

➤ Insulation

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m³,
- Zero ODP and Low GWP.

➤ Doors

- Holding back doors 180°

➤ Refrigeration

- Temperature regulated by a digital controller,
- Manual defrost,
- System of ventilated condensation,
- System of Cold board+Tube Evaporation.
- Climate class 4 (30°C, 55HR).

➤ Electrical

- Conexión eléctrica: 220 V / 1 ph / 50 Hz.




OPTIONAL

- Electrical connection 220 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.

MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Power (W)	Comp. (HP)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Container 20'/40'/40'HC	Trailer
	Length	Depth	Height								
VEB4CP	950	470	270	22	130	1/6	140	2,1	0,9	192 / 400 / 450	545
VEB6CP	1250	470	270	24	130	1/6	140	2,1	0,9	168 / 344 / 387	477
VEB7CP	1450	470	270	26	130	1/6	140	2,1	0,9	128 / 264 / 297	414
VEB8CP	1600	470	270	28	130	1/6	140	2,1	0,9	120 / 256 / 288	369
VEB9CP	1800	470	270	30	130	1/6	140	2,1	0,9	120 / 248 / 279	324

MODELS: **VEB4CP** **VEB7CP** **VEB9CP**
VEB6CP **VEB8CP**
BAR AND DISPLAY EXHIBITOR CASE AND PLATE

GENERAL VIEW

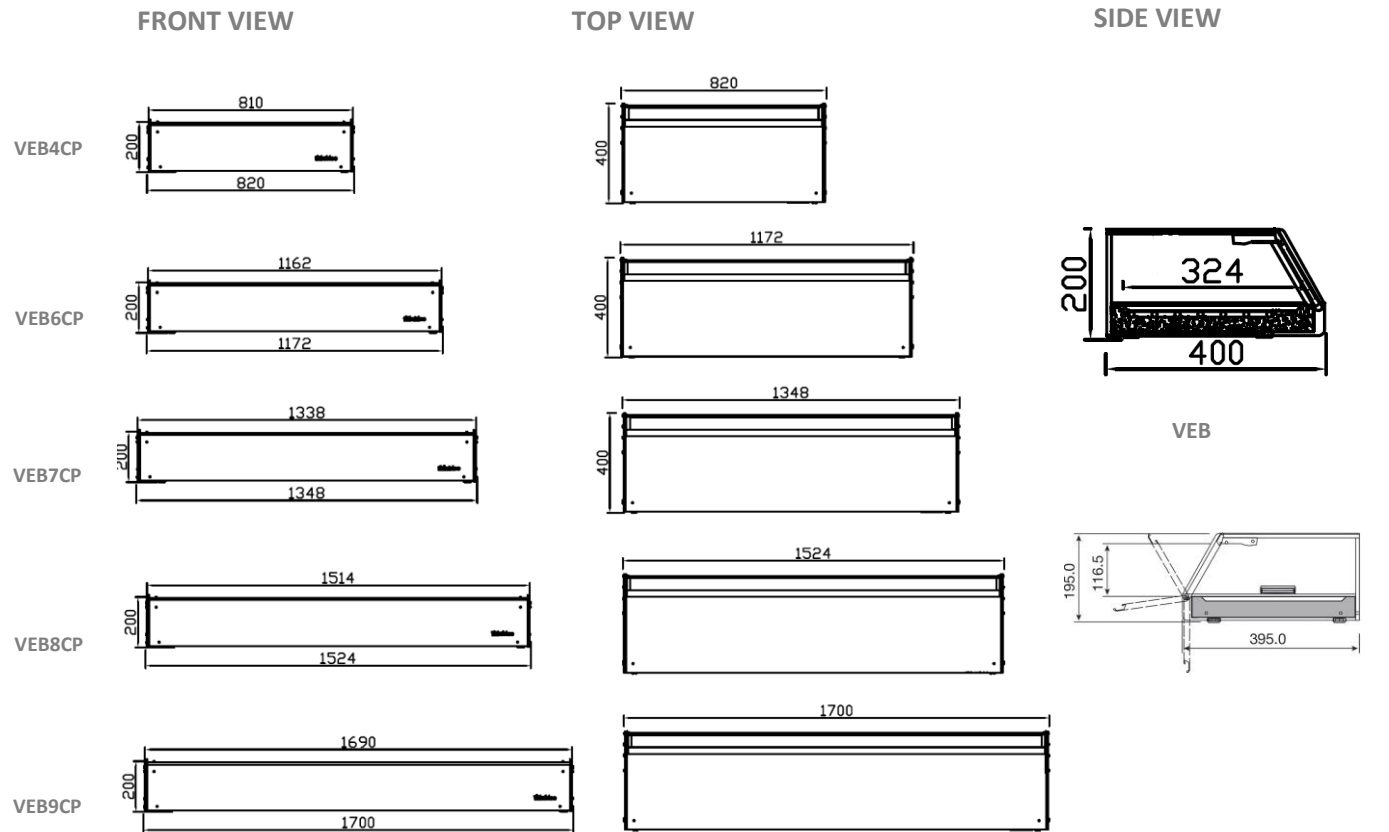

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	D (mm)
VEB4CP	38,0	44	-	-	-
VEB6CP	38,0	44	-	-	-
VEB7CP	38,0	44	-	-	-
VEB8CP	38,0	44	-	-	-
VEB9CP	38,0	44	-	-	-

