

MODELS: <b>VEG9</b>	<b>VEG12</b>	<b>VEG15</b>	<b>VEG18</b>	<b>Elegance series – promotional cases.</b>
---------------------	--------------	--------------	--------------	---

**Strengths**

- ✓ *Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All condenser units are tested 100%, in helium chambers to refrigerant leak detections.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*



VEG15

MODEL	Dimensions (mm)			Sides thickness (mm)	Exposure surface (m <sup>2</sup> )	Cabinet volume (L)	Gross volume (L)	Temp. regime (°C)	Ref.	Net weight (Kg.)
	Largo	Fondo	Alto							
VEG9	938	1075	1260	30+30	0,93	319	1270	+2°C/+5°C	R452A	154
VEG12	1250	1075	1260	30+30	1,25	425	1693	+2°C/+5°C	R452A	186
VEG15	1562	1075	1260	30+30	1,56	531	2116	+2°C/+5°C	R452A	194
VEG18	1875	1075	1260	30+30	1,87	638	2540	+2°C/+5°C	R452A	206

MODELS: <b>VEG9</b>	<b>VEG12</b>	<b>VEG15</b>	<b>VEG18</b>	<b>Elegance series – promotional cases.</b>
---------------------	--------------	--------------	--------------	---

**STANDARD FEATURES**

➤ **Exterior**

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- Enamelled steel base.
- Lacquered DM decoration.
- Night curtain.

➤ **Interior**

- Plastic coated steel interior.
- Enamelled steel exposure surface.

**OPTIONAL**

- Electrical connection 230 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.

➤ **Insulation**

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m<sup>3</sup>.
- Zero ODP and Low GWP.

➤ **Refrigeration**

- End defrost temperature regulated by a digital controller.
- Hot gas defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 3 (25°C, 60%RH).

➤ **Electrical**


- Electrical connection: 230 V / 1 ph / 50 Hz.



MODEL	Dimensions palletizing (mm)			Pallet weight (Kg.)	Power (W)	Comp. (HP)	Cooling power (W at -10°C)	Consumption (kWh/24h)	Container 20'/40'/40'HC	Trailer
	Length	Depth	Height							
VEG9	1100	1125	1405	190	1015	5/8	1096	16,2	10 / 10 / 20	24
VEG12	1340	1125	1405	220	1070	3/4	1315	17,1	8 / 17 / 17	20
VEG15	1720	1125	1405	240	1310	7/8	1506	21,0	6 / 13 / 13	15
VEG18	2030	1125	1405	275	1405	1	1840	28,1	5 / 11 / 11	13

MODELS: **VEG9** **VEG12** **VEG15** **VEG18** *Elegance series – promotional cases.*

**GENERAL VIEW**

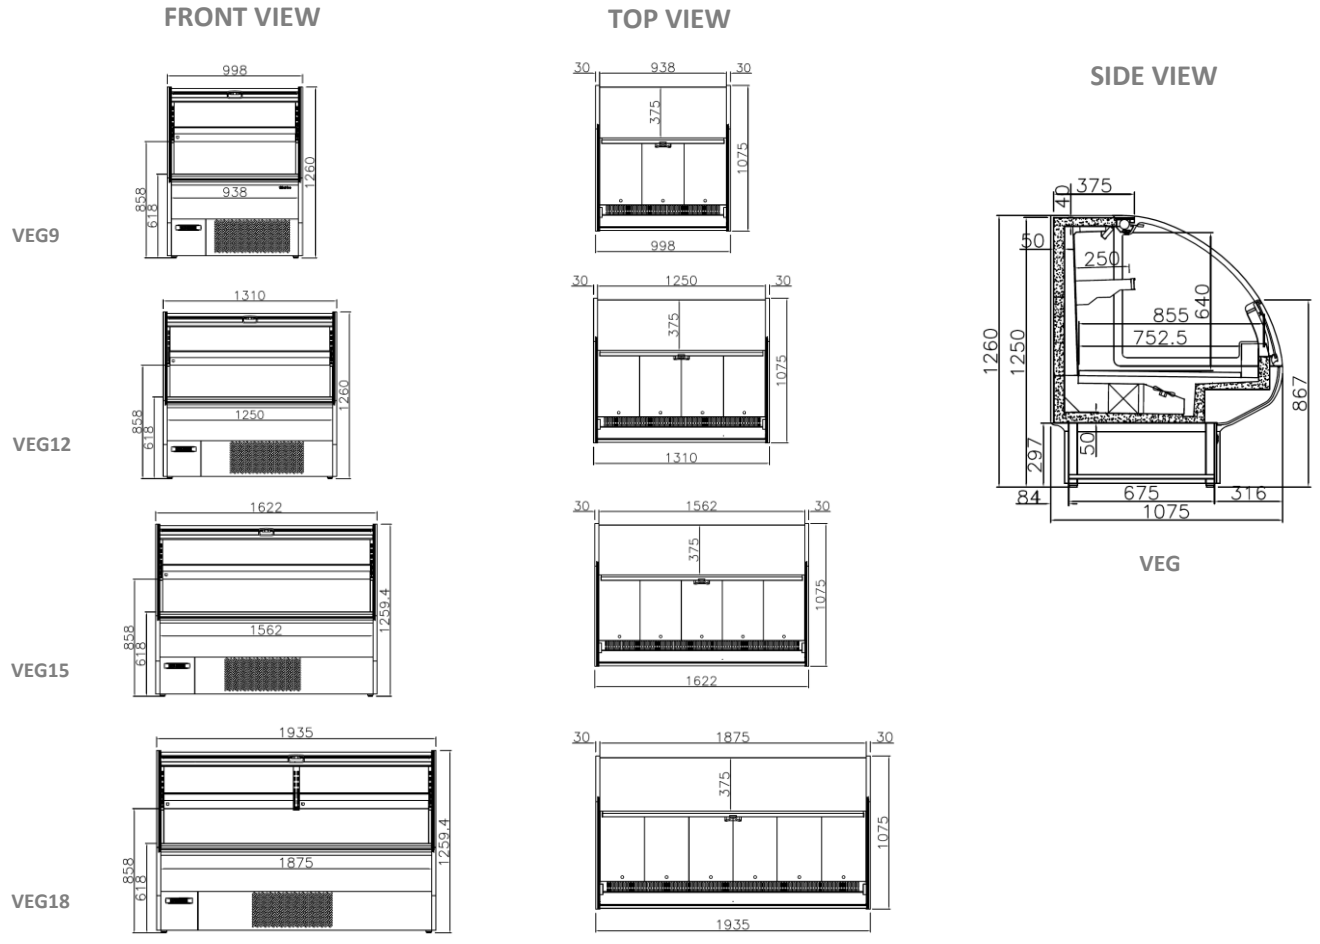

**CONNECTIONS**

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
VEG9	938	185	545	635	155
VEG12	1250	185	545	635	155
VEG15	1562	185	545	635	155
VEG18	1875	185	545	635	155

