

MODELS: VEU9R/RCP VEU12R/RCP	VEU15R/RCP VEU18R/RCP	VEU25R/RCP VEU31R/RCP	VEU37R/RCP	Ventilated with storage curved glass. Europa Series.
---	--	--	-------------------	---

Strengths

- ✓ **Combination of different cooling system modules: ventilated, half-static and static. Modules with or without cooled storage. Angles and counters to adapt the line to a space.**
- ✓ **Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.**
- ✓ **All condenser units are tested 100%, in helium chambers to refrigerant leak detections.**
- ✓ **LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.**
- ✓ **Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.**



VEU18RCP



VEU18R

MODELS	Dimensions (mm)			Sides thickness (mm)	Nº Doors	Exposure surface (m2)	Gross chambre (L)	Gross volume (L)	Temp. regime (°C)	Ref.	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Height									
VEU9R/RCP	938	1285	1310	30 + 30	1	0,86	159	1580	0°C/+6°C	R452A	350	154
VEU12R/RCP	1250	1285	1310	30 + 30	2	1,14	213	2100	0°C/+6°C	R452A	400	186
VEU15R/RCP	1562	1285	1310	30 + 30	2	1,43	266	2630	0°C/+6°C	R452A	450	194
VEU18R/RCP	1875	1285	1310	30 + 30	3	1,72	319	3160	0°C/+6°C	R452A	550	206
VEU25R/RCP	2500	1285	1310	30 + 30	4	2,29	425	4210	0°C/+6°C	R452A	650	240
VEU31R/RCP	3125	1285	1310	30 + 30	5	2,86	531	5265	0°C/+6°C	R452A	-	250
VEU37R/RCP	3750	1285	1310	30 + 30	6	3,43	638	6315	0°C/+6°C	R452A	-	360

MODELS: VEU9R/RCP VEU12R/RCP	VEU15R/RCP VEU18R/RCP	VEU25R/RCP VEU31R/RCP	VEU37R/RCP	Ventilated with storage curved glass. Europa Series.
---	--	--	-------------------	---

STANDARD FEATURES

➤ Modular lines

- Different cooling system modules can be combined using complete dividers.
- Designed for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

➤ Exterior

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- Galvanised steel exposure surface.
- Lacquered DM decoration.
- Folding secured curved glass.

➤ Interior

- Plastic coated steel interior.
- Enamelled steel base.
- LED lighted shelf and exposure surface.
- Storage door clearance of 425x255 mm.

OPTIONAL

- ☐ Stainless steel exposure surface.
- ☐ Night curtains.
- ☐ Heated glass.

➤ Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ Refrigeration

- Temperature and defrost regulated by a digital controller.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.



- ☐ Heated glass.
- ☐ Range of decoration colours (consult).
- ☐ Electrical connection 230 V / 1 ph / 60 Hz.
- ☐ Electrical connection 115 V / 1 ph / 60 Hz.

MODELS	Palletizing Dimensions (mm)			Palet weight (Kg.)	Power (W)	Comp. (HP)	Cool power (W a -10°C)	Consume (kWh/24h)	Inten. (A)	Container 20' / 40' / 40'HC	Trailer
	Length	Depth	Height								
VEU9R/RCP	1100	1385	1500	190	755	1/2	817	10,6	3,1	8 / 17 / 17	22
VEU12R/RCP	1340	1330	1500	200	1015	5/8	1096	14,2	3,5	4 / 8 / 8	10
VEU15R/RCP	1700	1330	1530	215	1070	3/4	1315	15,0	4,5	4 / 8 / 8	10
VEU18R/RCP	2030	1330	1530	279	1310	1	1506	18,3	5,5	4 / 8 / 8	10
VEU25R/RCP	2660	1330	1500	329	1585	1 + 1/6	2009	22,2	6,1	2 / 4 / 4	5
VEU31R/RCP	3275	1340	1500	380	310	-	2600	4,3	1,6	1 / 3 / 3	4
VEU37R/RCP	3900	1340	1500	570	370	-	3000	5,2	1,1	1 / 3 / 3	3

MODELS: **VEU9R/RCP**
VEU12R/RCP

VEU15R/RCP
VEU18R/RCP


VEU25R/RCP
VEU31R/RCP

VEU37R/RCP


Ventilated with storage curved glass. Europa Series.

GENERAL VIEW


FRONT VIEW

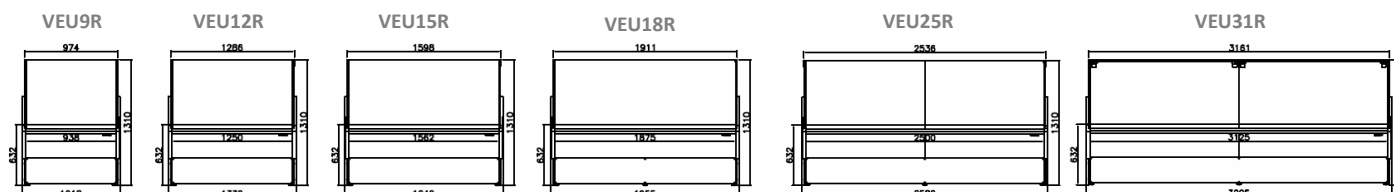


TOP VIEW

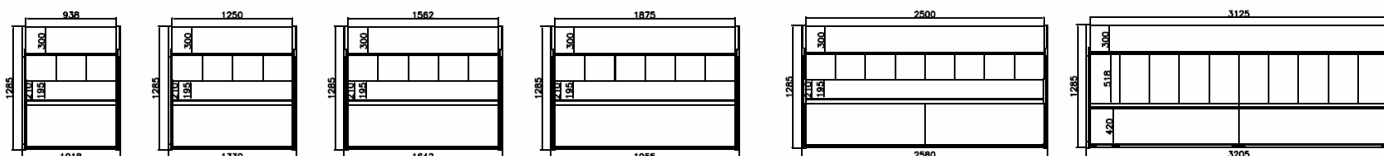


VEU37R

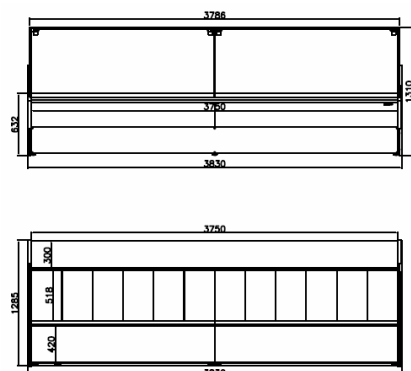

SIDE VIEW

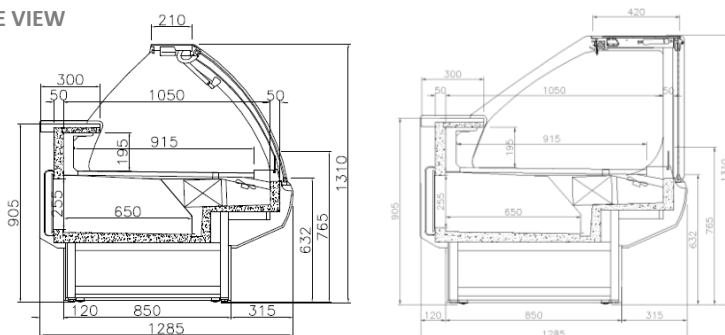

CONNECTIONS

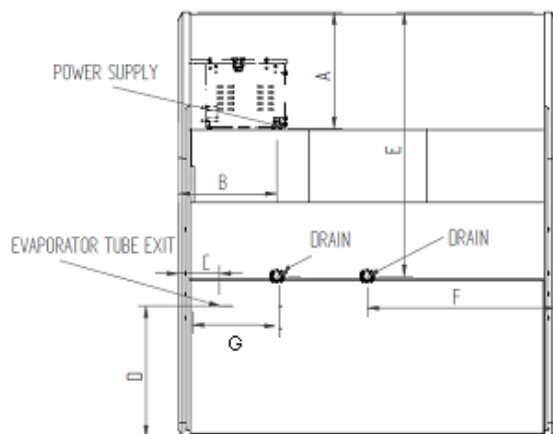

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
VEU9R/RCP	303	260	108	341	687	500	-
VEU12R/RCP	303	260	108	341	687	625	-
VEU15R/RCP	303	260	108	341	687	781	-
VEU18R/RCP	303	260	108	341	687	938	-
VEU25R/RCP	303	260	108	341	687	1250	-
VEU31R/RCP	303	260	108	341	687	150	150
VEU37R/RCP	303	260	108	341	687	150	150