

MODELS:	VMB9R VMB12R	VMB15R VMB18R	VMB25R
---------	-----------------	------------------	--------

Marbella series – Ventilated with storage.



VMB15R

Strengths

- ✓ *Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All condenser units are tested 100%, in helium chambers to refrigerant leak detections.*
- ✓ *LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*

MODEL	Dimensions (mm)			Nº Shelves	Nº Doors	Exposure surface (m ²)	Cabinet volume (L)	Gross volume (L)	Temp. regime (°C)	Ref.
	Length	Depth	Height							
VMB9R	998	953	1300	1	1	0,62	103	1250	0°C/+6°C	R452
VMB12R	1310	953	1300	1	2	0,83	138	1642	0°C/+6°C	R452
VMB15R	1622	953	1300	1	2	1,03	172	2033	0°C/+6°C	R452
VMB18R	1935	953	1300	1	3	1,24	206	2425	0°C/+6°C	R452
VMB25R	2560	953	1300	1	4	1,65	275	3210	0°C/+6°C	R452

MODELS:	VMB9R VMB12R	VMB15R VMB18R	VMB25R	Marbella series – Ventilated with storage.
---------	-----------------	------------------	--------	---

STANDARD FEATURES

Exterior

- Plastic coated steel exterior.
- Stratified polilaminate worktop.
- Enamelled exhibition steel surface.
- Curved tempered security glass system.

Interior

- Laminated steel interior.
- Enamelled steel base.
- (1) middle shelf (without light).
- LED lighting for exhibition surface.

OPTIONAL

- Shelf LED lighting.
- Frontal decoration LED lighting.
- Sliding back doors.
- Range of decoration colours (consult).
- Electrical connection 230 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.

Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

Refrigeration

- Temperature and defrost regulated by a digital controller.
- Defrost end temperature control.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.




MODEL	Dimensions palletizing (mm)			Power (W)	Comp. (HP)	Cooling power (W at -10°C)	Consumption (kWh/24h)
	Length	Depth	Height				
VMB9R	1080	1100	1415	700	1/2	817	9,8
VMB12R	1392	1100	1415	950	5/8	1096	13,3
VMB15R	1704	1100	1415	1000	3/4	1315	14,0
VMB18R	2017	1100	1415	1230	1	1506	17,2
VMB25R	2642	1100	1415	1460	1 + 1/6	2009	20,4


MODELS:	VMB9R VMB12R	VMB15R VMB18R	VMB25R	<i>Marbella series – Ventilated with storage.</i>
---------	-----------------	------------------	--------	---

GENERAL VIEW

FRONT VIEW

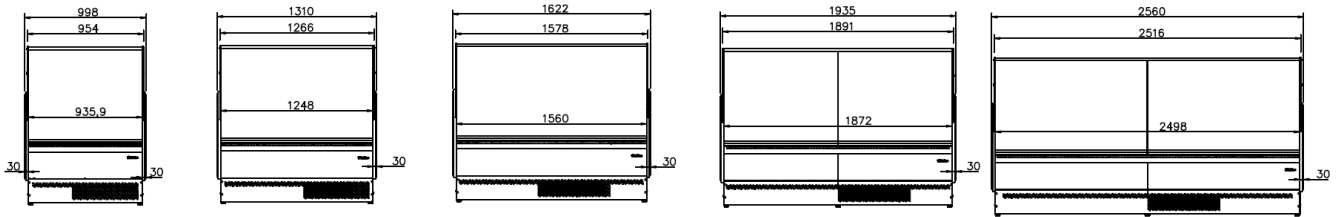

TOP VIEW

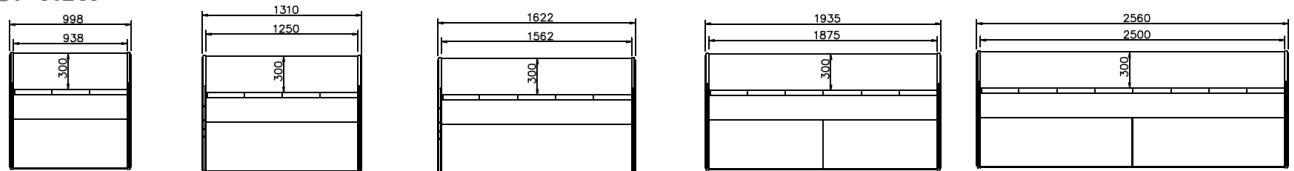

VMB9R


VMB12R

VMB15R


VMB18R

VMB25R

SIDE VIEW

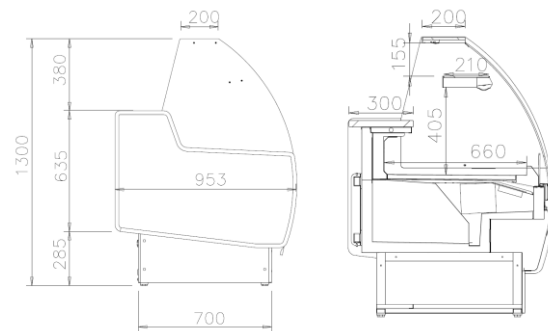

CONNECTIONS

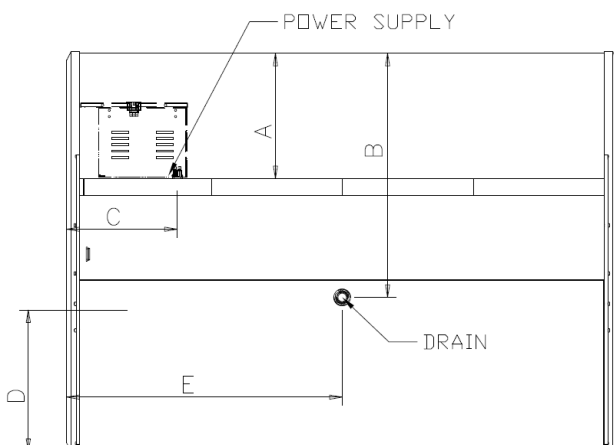

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
VMB9R	300	583	263	338	469
VMB12R	300	583	263	338	625
VMB15R	300	583	263	338	781
VMB18R	300	583	263	338	937,5
VMB25R	300	583	263	338	1250