

LP4060

Dimensión (An x Pr x Al) *Puerta abierta / mm 600x700(1135*)x1228
 Dimensions (W x D x H) *Door Open /
 Dimensions (L x P x H) *Porte ouverte

Dimensión embalaje (An x Pr x Al) / mm 700x800x1250
 Packaging dimensions (W x D x H) /
 Dimensions de l'emballage (L x P x H)

Peso bruto / Gross weight / Poids brut Kg 80

Peso neto / Net weight / Poids net Kg 74

Volumen / Volume / Volume mc 0,6



Dimensión Cesto/ Basket dimensions/ Dimensions du panier	mm	500x600
Max puerta / Max door / Max porte	mm	405
Max altura vasos / platos / Max glass / plate height / Hauteur max verres / assiettes	mm	380
Guías del cesto / Basket guides / Glissières du panier	plano / flat / plat	
Construcción general / General construction / Construction générale	Doble pared / Double wall / Double paroi	
Construcción puerta / Door construction / Construction de la porte	Doble pared / Double wall / Double paroi	

Construcción cuba / Tank construction / Construction de la cuve	Embutido/ Deep drawn/ Embouti
Volumen cuba / Tank volume / Volume de la cuve	L 23
Pot. Res. de la cuba / Tank heating element power , Puissance de la résistance de cuve	W 2.100
Filtro de cuba / Tank filter / Filtre de cuve	Sí - inox/ Yes - inox/ Oui - inox

LP4060

Tipología de bomba / Pump type / Typologie de pompe		Doble flujo / Dual flow / Double flux
Pot. bomba de lavado / Wash pump power / Puiss. de la pompe de lavage	W	700
Arranque suave / Soft start / Démarrage progressif		✓
Temp. cuba de lavado / Wash tank temperature / Temp. de la cuve de lavage	°C	60

Tipología calderín / Boiler type / Typologie de chaudière		Sin presión / Without pressure / Sans pression
Volumen calderín / Boiler volume / Volume de la chaudière	L	7,0
Dispositivo de contraflujo / Backflow device / Dispositif de clapet anti-retour		De ruptura / Break tank / Rés.de rupture
Pot. Res. del calderín / Boiler heating element power / Puissance de la résistance de la chaudière	W	7.000


Bomba de aclarado / Rinse pump / Pompe de rinçage		YES
Pot. bomba de aclarado / Rinse pump power / Puis. de la pompe de rinçage	W	200
Temp calderín / Boiler temperature / Temp. de la chaudière	°C	80
Cons. de agua / Water consumption / Consommation d'eau	l x Cesto	2,4
Presión de agua necesaria / Required water pressure / Pression d'eau requise	bar	1 - 6

LP4060	
Sistema de desagüe / Drain system / Système de vidange	Drenaje parcial / Partial drain / Vidange partielle
Bomba desagüe / Drain pump / Pompe de vidange	✓
Dos. de abrillantador / Rinse aid dispenser / D. de produit de rinçage	✓
Dosificador de deter. Detergent dispenser / Doseur de détergent	✓
Bomba de aclarado/ Rinse pump/ Pompe de rinçage	✓

Ciclos de lavado / Wash cycles / Cycles de lavage	sec	120-240-360-720
Ciclo especial / Special cycle / Cycle spécial	prog	n°6
Autolimpieza de la cuba / Tank self-cleaning / Autonettoyage cuve		✓

Pot. máx. funcionamien W Max.operating power / Puis. Max. en fonctionnement		9.800
Conexión eléctrica / Electrical connection / Raccordement électrique	V-ph-Hz	400V 3N 50Hz
Fusible / Fuse / Fusible	A	16

LP4060

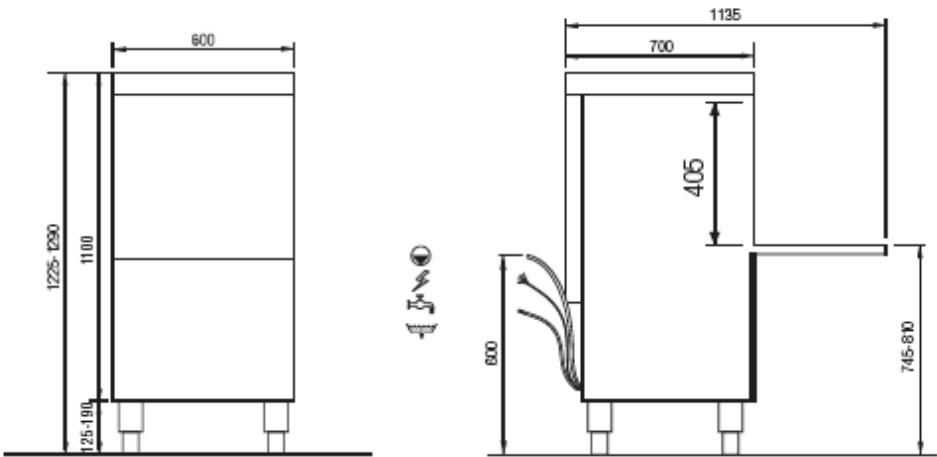

Cesto universal / Universal rack / Universel verres	Rejilla para bandejas / Tray rack / Grille pour plateaux	Cable eléctrico / Power cable / Câble électrique	Mang. de desagüe / Drain hose / Tuyau de vidange	Mang. de carga / Inlet hose / Tuyau d'alimentation
1	opcional 1	✓	✓	✓