

LP8570

Dimensión (An x Pr x Al) *Puerta abierta /	mm	853x857(1400*)x
Dimensions (W x D x H) *Door Open /		1959(*2274)
Dimensions (L x P x H) *Porte ouverte		

Dimensión embalaje (An x Pr x Al) /	mm	1000x950x2200
Packaging dimensions (W x D x H) /		
Dimensions de l'emballage (L x P x H)		

Peso bruto / Gross weight / Poids brut	Kg	191
--	----	-----

Peso neto / Net weight / Poids net	Kg	181
------------------------------------	----	-----

Volumen / Volume / Volume	mc	2,10
---------------------------	----	------



Dimensión Cesto/ Basket dimensions/ Dimensions du panier	mm	700x700
Max puerta / Max door / Max porte	mm	850
Max altura vasos / platos / Max glass / plate height / Hauteur max verres / assiettes	mm	800
Construcción general / General construction / Construction générale	Doble pared / Double wall / Double paroi	
Construcción puerta / Door construction / Construction de la porte	Doble pared / Double wall / Double paroi	

Construcción cuba / Tank construction / Construction de la cuve	Embutido/ Deep drawn/ Embouti	
Volumen cuba / Tank volume / Volume de la cuve	L	68
Pot. Res. de la cuba / Tank heating element power , Puissance de la résistance de cuve	W	8.000
Filtro de cuba / Tank filter / Filtre de cuve	Sí - inox/ Yes - inox/ Oui - inox	

www.infrico.com

info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



LP8570

Tipología de bomba / Pump type / Typologie de pompe		Doble flujo / Dual flow / Double flux
Pot. bomba de lavado / Wash pump power / Puiss. de la pompe de lavage	W	3.000
Temp. cuba de lavado / Wash tank temperature / Temp. de la cuve de lavage	°C	55 (55-65)

Tipología calderín / Boiler type / Typologie de chaudière		Sin presión / Without pressure / Sans pression
Volumen calderín / Boiler volume / Volume de la chaudière	L	12
Dispositivo de contraflujo / Backflow device / Dispositif de clapet anti-retour		De ruptura / Break tank / Rés.de rupture
Pot. Res. del calderín / Boiler heating element power / Puissance de la résistance de la chaudière	W	8.000


Bomba de aclarado / Rinse pump / Pompe de rinçage		YES
Pot. bomba de aclarado / Rinse pump power / Puis. de la pompe de rinçage	W	200
Temp calderín / Boiler temperature / Temp. de la chaudière	°C	80 (80-85)
Cons. de agua / Water consumption / Consommation d'eau	l x Cesto	4
Presión de agua necesaria / Required water pressure / Pression d'eau requise	bar	1 - 6

LP8570	
Sistema de desagüe / Drain system / Système de vidange	Drenaje parcial / Partial drain / Vidange partielle
Bomba desagüe / Drain pump / Pompe de vidange	✓
Dos. de abrillantador / Rinse aid dispenser / D. de produit de rinçage	✓
Dosificador de deter. Detergent dispenser / Doseur de détergent	✓
Bomba de aclarado/ Rinse pump/ Pompe de rinçage	✓

Ciclos de lavado / Wash cycles / Cycles de lavage	sec	120-240-360-720
Ciclo especial / Special cycle / Cycle spécial	prog	n°6
Autolimpieza de la cuba / Tank self-cleaning / Autonettoyage cuve		✓

Pot. máx. funcionamien Max.operating power / Puis. Max. en fonctionnement	W	10.700
Conexión eléctrica / Electrical connection / Raccordement électrique	V-ph-Hz	400V 3N 50Hz
Fusible / Fuse / Fusible	A	25

LP8570

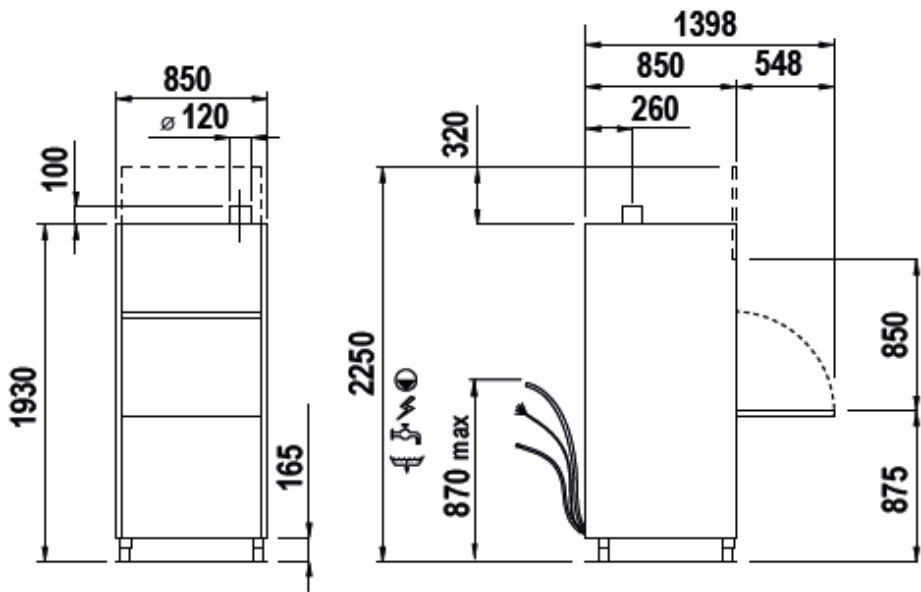

Cesto universal / Universal rack / Universel verres	Rejilla para bandejas / Tray rack / Grille pour plateaux	Cable eléctrico / Power cable / Câble électrique	Mang. de desagüe / Drain hose / Tuyau de vidange	Mang. de carga / Inlet hose / Tuyau d'alimentation
1	opcional	1	✓	✓