

TA31102


Dimensión (An x Pr x Al) *Puerta abierta / mm 1.968 x 770 x 1.615
 Dimensions (W x D x H) *Door Open / (2088*)
 Dimensions (L x P x H) *Porte ouverte

Dimensión embalaje (An x Pr x Al) / mm 2.100x920x1800
 Packaging dimensions (W x D x H) /
 Dimensions de l'emballage (L x P x H)

Peso bruto / Gross weight / Poids brut Kg 300

Peso neto / Net weight / Poids net Kg 260

Volumen / Volume / Volume mc 3,8

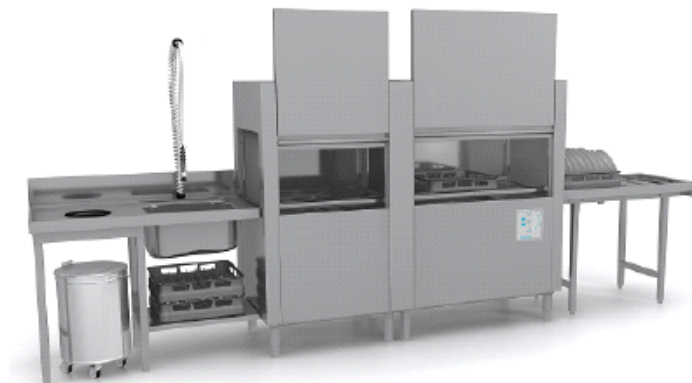

Dimensión Cesto/ Basket dimensions/ Dimensions du panier	mm	500x500
Altura útil de la cámara de lavado / Useable wash chamber height / Hauteur utile de la chambre de lavage	mm	450
Construcción general / General construction / Construction générale	Doble pared / Double wall / Double paroi	
Construcción puerta / Door construction / Construction de la porte	Doble pared y aislado / Double skin and insulated / Double paroi et isolé	

Construcción cuba / Tank construction / Construction de la cuve		Embutido/ Deep drawn/ Embouti
Construcción de la cuba de prelavado / Pre-wash tank construction / Construction d cuve de pré-lavage		Embutido/ Deep drawn/ Embouti
Volumen cuba / Tank volume / Volume de la cuve	L	70
Pot. Res. de la cuba / Tank heating element power , Puissance de la résistance de cuve	W	10.500
Filtros superficie cuba lavado Wash tank surface strainers / Filtres surface cuve lavage		Acero inoxidable / Stainless steel / Acier inoxydable
Filtros cuba extraíbles / Wash drawer strainers / Filtres cuve extractibles		Acero inoxidable / Stainless steel / Acier inoxydable
Volumen cuba prelavado / Pre-wash tank volume / Volume cuve pré-lavage	L	70
Resistencia cuba prelavado / Pre-wash tank heating eleme Résistance cuve pré-lavage	W	-
Filtros superficie cuba prelava Pre-wash tank surface straine Filtres surface cuve pré-lavage		Acero inoxidable / Stainless steel / Acier inoxydable
Filtros cuba prelavado extraíb Pre-wash drawer strainers / F cuve pré-lavage extractibles		Acero inoxidable / Stainless steel / Acier inoxydable

TA31102

Tipología de bomba / Pump type / Typologie de pompe		Doble flujo / Dual flow / Double flux
Pot. bomba de lavado / Wash pump power / Puiss. de la pompe de lavage	W	1.500
Caudal bomba de lavado / Wash pump flow rate / Débit de la pompe de lavage	Lt/min	720
Temperatura de lavado / Wash temperature / Température de lavage	°C	60
Tipo de bomba de prelavado / Pre-wash pump type / Type de pompe de pré-lavage		Doble flujo / Dual flow / Double flux
Pot. de la bomba de prelava. / wash pump power / Puissance de la pompe de pré-lavage	W	1.500
Temperatura de prelavado / Pre-wash temperature / Température de pré-lavage	°C	45

Volumen calderín / Boiler volume / Volume de la chaudière	L	17
Resistencia calderín (entrada 50 °C) estándar / Boiler heating element (50°C inlet) standard / Résistance chauffe-eau (entrée 50 °C) standard	W	16.000
Resistencia calderín (entrada 10 °C estándar) / Boiler heating element (10°C inlet) standard / Résistance chauffe-eau (entrée 10 °C) standard		31.000
Resistencia calderín (entrada 10 °C + recuperación) / Boiler heating element (10°C inlet + recovery) / Résistance chauffe-eau (entrée 10 °C + récupération)	W	23.500
Sistema antirretorno / Back-flow system / Système anti-retour		Valve


Bomba de aclarado / Rinse pump / Pompe de rinçage		single rinse
Prelavado / Pre-rinse / Prérinçage		-
Temperatura de aclarado / Rinse temperature / Température de rinçage	°C	82
Cons. de agua de aclarado / Rinse water consumption / Cons d'eau de rinçage	Liter/hour	300
Temp. de entrada del agua / Inl. water temperature / Temp. d'entrée d'eau	°C	Cold:10-40°C Hot:45-60°C
Pres. de agua externa ópti. / Optimal external water pres./ Pres. d'eau externe optimale	bar	from 2 to 4

Sistema de desagüe / Drain system / Système de vidange		overflow
Diámetro de desagüe / Drain size / Diamètre vidange	G	1' 1/2"
Prod. – velocidad 1 / Prod. – speed 1 / Prod. – vitesse 1	r/h	210
Prod. – velocidad 2 / Prod. – speed 2 / Prod. – vitesse 2	r/h	110

TA31102

Nivel de ruido / Noise level / Niveau sonore	db	< 70
Pot.del transportador / Conveyor power / Puissance du convoyeur	W	200
Conexión eléctrica / Electrical connection / Connexion électrique	V - ph - Hz	400V 3N 50Hz
Pote. eléctrica máx. (50 °C) / Max. electric power (50°C) standard / Puissance électri max. (50 °C) standard	W	30.000
Potencia eléctrica máx. (10 °C) / Max. electric power (10°C) / Puissance électrique max. (:	W	45.000
Potencia eléctrica máx. (10 °C + recuperación) / Max. electric power (10°C + recovery) / Puissance électrique max. (+ récupération)	W	37.770

Cesta para platos / Plates rack / Panier à assiettes	Cesta para cubiertos / Cutlery basket / Panier à couverts	Cesta para platos / Flat rack / Panier pla	Cable eléctrico / Power cable / Câble électrique	Mang. de desagüe / Drain hose / Tuyau de vidange	Mang. de carga / Inlet hose / Tuyau d'alimentation
1	1	1	✓	✓	✓

[illegible]

www.infrico.com
info@infrico.com


Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice







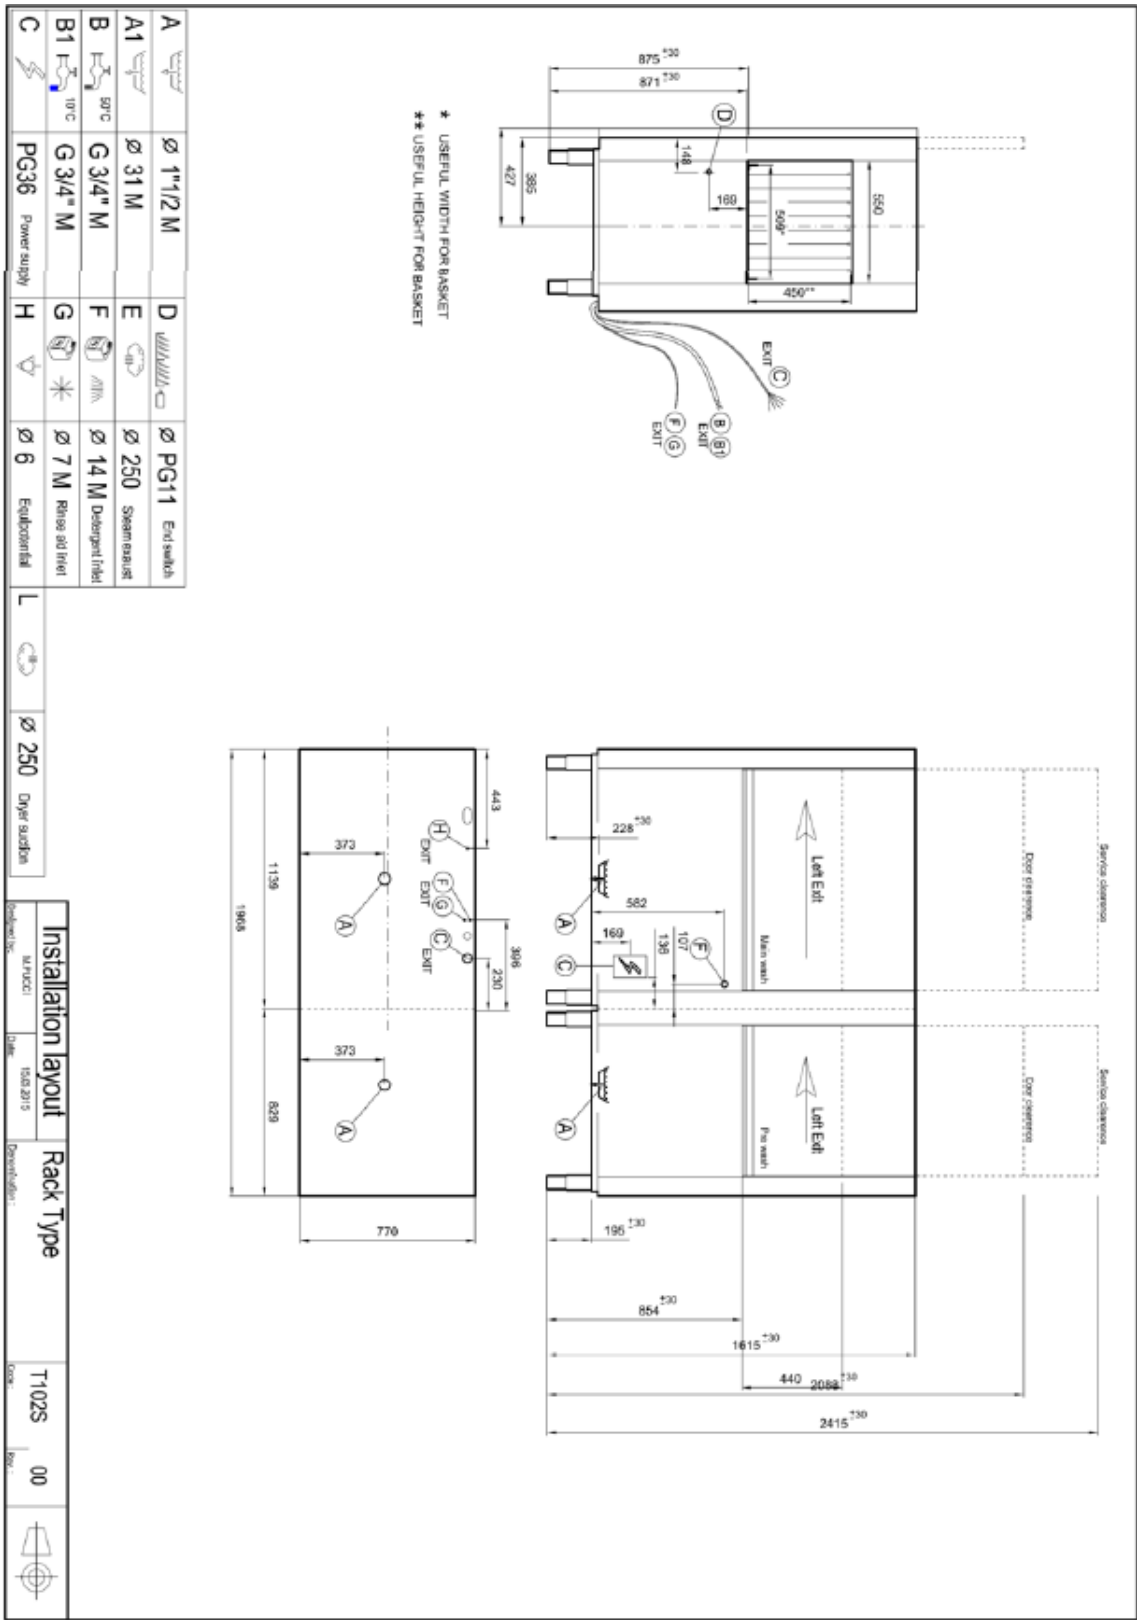

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

