


Documentación Técnica

Modelo:

VBC_RU+

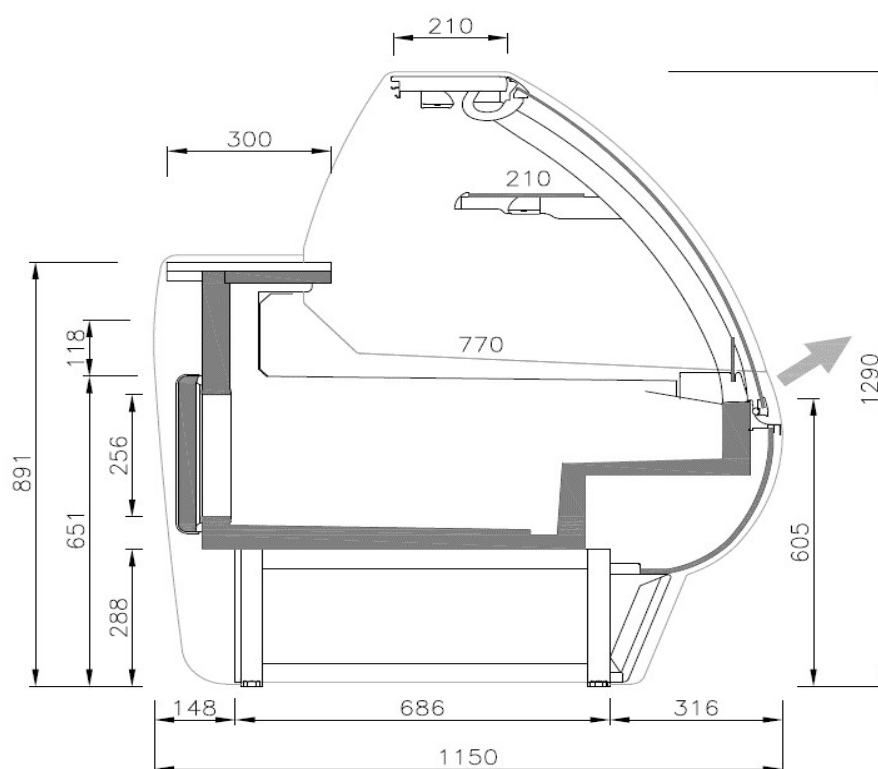



DATOS GENERALES

	MODELO						
	VBC09RU+	VBC12RU+	VBC15RU+	VBC18RU+	VBC25RU+	VBC31RU+	VBC37RU+
	M1	M1	M1	M1	M1	M1	M1
LONGITUD [mm]	938	1250	1562	1875	2500	3125	3750
ESPESOR LATERALES [mm]	30+30						
CONTROL	DIGITAL						
AREA REFRIGERADA [m ²]	0,92	1,23	1,53	1,84	2,45	3,06	3,68
VOLUMEN UTIL [lts.]	82	109	137	164	219	273	328
TDA - AREA TOTAL DISPLAY [m ²]	0,64	0,85	1,07	1,28	1,71	2,13	2,56
PESO BRUTO [kg]	190	200	240	275	300	420	570
DIM. EN TRANSPORTE [mm]	1100 x 1220 x 1500	1410 x 1220 x 1530	1740 x 1220 x 1500	2080 x 1220 x 1530	2660 x 1220 x 1530	3310 x 1220 x 1530	3930 x 1220 x 1530

DETALLES INSTALACIÓN

TABLA DE DATOS	MODELO	VBC09	VBC12	VBC15	VBC18	VBC25	VBC31	VBC37
	A (mm)	303	303	303	303	303	303	303
	B (mm)	260	260	260	260	260	260	260
	C (mm)	108	108	108	108	108	108	108
	D (mm)	341	341	341	341	341	341	341
	E (mm)	687	687	687	687	687	687	687
	F (mm)	500	625	781	938	1250	1500	1500

DESAGÜES

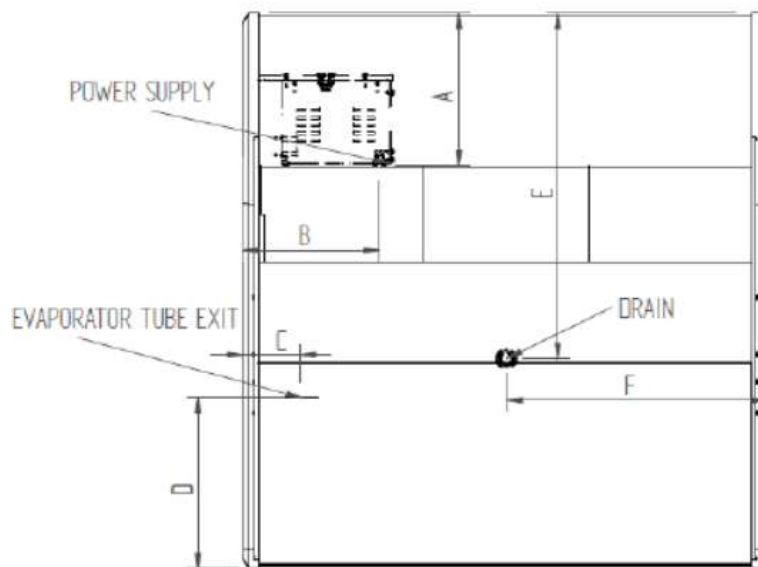

CONFIGURACIÓN TÉCNICA

		M1 [-1°C/+5°C]
TEMPERATURA INTERIOR	SET POINT	2°C
	DIFERENCIAL	4°C
TIPO DE DESESCARCHE		NATURAL
Nº DESESCARCHES x DIA		4
TEMPERATURA FIN DESESCARCHE		8°C
TIEMPO MAXIMO DESESCARCHE		30'

De conformidad con EN ISO23953-1/-2

T Ambiente	Humedad Relativa	Clase climática
+25 °C	60 %	3

EVAPORACIÓN	VENTILADA
CONDENSACIÓN	VENTILADA
EVAP. BANDEJA RECOGIDA AGUA	AUXILIAR

TENSIÓN	220 V/50 Hz
NIVEL SONORO	-

DATOS INSTALACIÓN


EQUIPAMIENTO BASE		MODELO						
		VBC09RU+	VBC12RU+	VBC15RU+	VBC18RU+	VBC25RU+	VBC31RU+	VBC37RU+
Longitud (mm)		938	1250	1562	1875	2500	3125	3750
COMPRESOR	Nº	1	1	1	1	1	2	2
	W	336	440	485	567	972	972	972
	A	3,04	2,9	2,7	2,7	4,96	4,96	4,96
REFRIGERANTE	Tipo	R290						
	gr	90	120	145	140	150	150+150	150+150
VENTILADORES EVAPORADOR	Nº	1	1	2	2	3	6	7
	W	4,8	4,8	4,8	4,8	4,8	4,8	4,8
	A	0,04	0,04	0,04	0,04	0,04	0,04	0,04
VENTILADORES CONDENSADOR	Nº	1	2	2	2	2	4	4
	W	25	25	25	25	25	25	25
	A	0,425	0,425	0,425	0,425	0,425	0,425	0,425
ILUMINACION LED	W	27	36	45	54	75	93	112
	A	0,12	0,16	0,20	0,25	0,34	0,42	0,51
RESISTENCIA EVAPORACIÓN [*]	W	450	450	450	450	450	450	450
	A	2	2	2	2	2	2	2
POTENCIA	W	393	531	590	681	1111	2166	2190
	A	3,63	3,95	3,83	3,88	6,27	12,28	12,41
CONSUMO	kWh/24h	5,18	7,01	7,78	8,98	14,67	28,59	28,90

[*] NOTA: El equipo requiere dos puntos de alimentación independientes, una para el mueble base y otra para la bandeja evaporativa.

Data Sheet

Model:

VBC_RU+

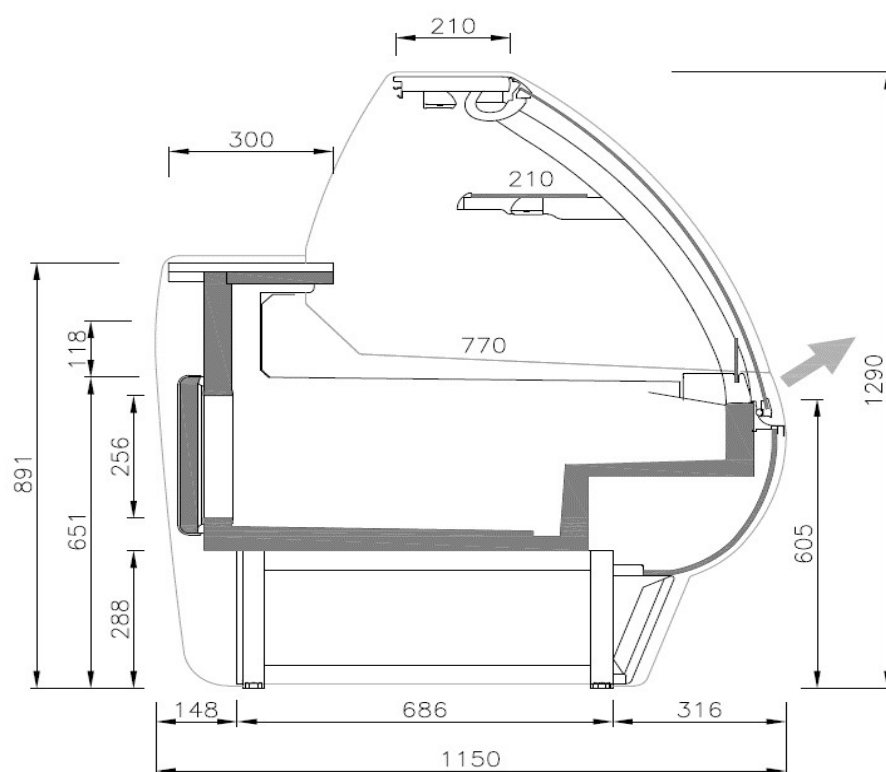

GENERAL DATA



	MODEL						
	VBC09RU+	VBC12RU+	VBC15RU+	VBC18RU+	VBC25RU+	VBC31RU+	VBC37RU+
	M1	M1	M1	M1	M1	M1	M1
LENGTH [mm]	938	1250	1562	1875	2500	3125	3750
SIDE WALL THICKNESS [mm]	30+30						
ELECTRONIC CONTRL	DIGITAL						
REFRIGERATED AREA [m ²]	0,92	1,23	1,53	1,84	2,45	3,06	3,68
USEABLE VOLUME [lts.]	82	109	137	164	219	273	328
TDA - AREA TOTAL DISPLAY [m ²]	0,64	0,85	1,07	1,28	1,71	2,13	2,56
WEIGHT [kg]	190	200	240	275	300	420	570
DIMESIONS IN TRANSPORT [mm]	1100 x 1220 x 1500	1410 x 1220 x 1530	1740 x 1220 x 1500	2080 x 1220 x 1530	2660 x 1220 x 1530	3310 x 1220 x 1530	3930 x 1220 x 1530

INSTALLATION DETAILS

MODELO	VBC09	VBC12	VBC15	VBC18	VBC25	VBC31	VBC37
A (mm)	303	303	303	303	303	303	303
B (mm)	260	260	260	260	260	260	260
C (mm)	108	108	108	108	108	108	108
D (mm)	341	341	341	341	341	341	341
E (mm)	687	687	687	687	687	687	687
F (mm)	500	625	781	938	1250	1500	1500

DATA TABLE

DRAINAGE

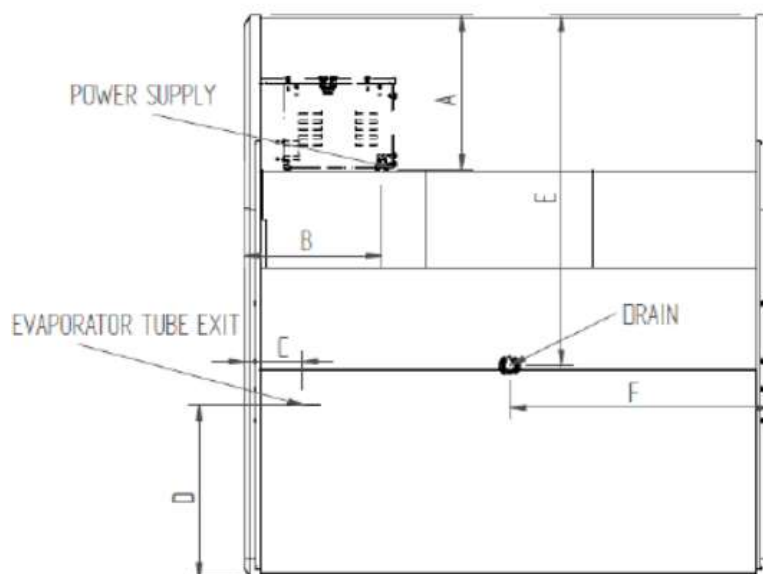

TECHNICAL CONFIGURATION

		M1 [-1°C/+5°C]
INTERIOR TEMPERATURE	SET POINT	2°C
	DIFFERENTIAL	4°C
DEFROSTING SYSTEM		NATURAL
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	-

INSTALLATION DATA

BASE EQUIPMENT		MODEL						
		VBC09RU+	VBC12RU+	VBC15RU+	VBC18RU+	VBC25RU+	VBC31RU+	VBC37RU+
Length (mm)		938	1250	1562	1875	2500	3125	3750
COMPRESSOR	N°	1	1	1	1	1	2	2
	W	336	440	485	567	972	972	972
	A	3,04	2,9	2,7	2,7	4,96	4,96	4,96
REFRIGERANT	Type	R290						
	gr	90	120	145	140	150	150+150	150+150
COIL FANS	N°	1	1	2	2	3	6	7
	W	4,8	4,8	4,8	4,8	4,8	4,8	4,8
	A	0,04	0,04	0,04	0,04	0,04	0,04	0,04
CONDESATOR FANS	N°	1	2	2	2	2	4	4
	W	25	25	25	25	25	25	25
	A	0,425	0,425	0,425	0,425	0,425	0,425	0,425
LIGHTING	W	27	36	45	54	75	93	112
	A	0,12	0,16	0,20	0,25	0,34	0,42	0,51
EVAPORATION HEATHER (*)	W	450	450	450	450	450	450	450
	A	2	2	2	2	2	2	2
POWER	W	393	531	590	681	1111	2166	2190
	A	3,63	3,95	3,83	3,88	6,27	12,28	12,41
ENERGY CONSUMPTION	kWh/24h	5,18	7,01	7,78	8,98	14,67	28,59	28,90

(*) NOTE: The equipment requires two independet power points, one for the base unit and one for the evaporative tray.

CONFIGURACIÓN TÉCNICA

		M1 [-1°C/+5°C]
TEMPERATURA INTERIOR	SET POINT	2°C
	DIFERENCIAL	4°C
TIPO DE DESESCARCHE		NATURAL
N° DESESCARCHES x DIA		4
TEMPERATURA FIN DESESCARCHE		8°C
TIEMPO MAXIMO DESESCARCHE		30'

De conformidad con EN ISO23953-1/-2

T Ambiente	Humedad Relativa	Clase climática
+25 °C	60 %	3

EVAPORACIÓN	VENTILADA
CONDENSACIÓN	VENTILADA
EVAP. BANDEJA RECOGIDA AGUA	AUXILIAR

TENSIÓN	220 V/50 Hz
NIVEL SONORO	-

DATOS INSTALACIÓN

EQUIPAMIENTO BASE		MODELO						
		VBC09RU+	VBC12RU+	VBC15RU+	VBC18RU+	VBC25RU+	VBC31RU+	VBC37RU+
Longitud (mm)		938	1250	1562	1875	2500	3125	3750
COMPRESOR	N°	1	1	1	1	1	2	2
	W	336	440	485	567	972	972	972
	A	3,04	2,9	2,7	2,7	4,96	4,96	4,96
REFRIGERANTE	Tipo	R290						
	gr	90	120	145	140	150	150+150	150+150
VENTILADORES EVAPORADOR	N°	1	1	2	2	3	6	7
	W	4,8	4,8	4,8	4,8	4,8	4,8	4,8
	A	0,04	0,04	0,04	0,04	0,04	0,04	0,04
VENTILADORES CONDENSADOR	N°	1	2	2	2	2	4	4
	W	25	25	25	25	25	25	25
	A	0,425	0,425	0,425	0,425	0,425	0,425	0,425
ILUMINACION LED	W	27	36	45	54	75	93	112
	A	0,12	0,16	0,20	0,25	0,34	0,42	0,51
RESISTENCIA EVAPORACIÓN (*)	W	450	450	450	450	450	450	450
	A	2	2	2	2	2	2	2
POTENCIA	W	393	531	590	681	1111	2166	2190
	A	3,63	3,95	3,83	3,88	6,27	12,28	12,41
CONSUMO	kWh/24h	5,18	7,01	7,78	8,98	14,67	28,59	28,90

(*) NOTA: El equipo requiere dos puntos de alimentación independientes, una para el mueble base y otra para la bandeja evaporativ