

MODELS:	VBC31R/S CP	VBC37R/S CP	Barcelona series – ventilated with/without storage, flat glass remote group.
---------	-------------	-------------	---

Strengths

- ✓ **Combination of different cooling system modules: ventilated, half-static and static. Modules with or without cooled storage. Angles and counters to adapt the line to a space.**
- ✓ **Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.**
- ✓ **All condenser units are tested 100%, in helium chambers to refrigerant leak detections.**
- ✓ **LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.**
- ✓ **Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.**



VBC31R/S CP

MODEL	Dimensions (mm)			Sides thickness (mm)	Nº Doors	Exposure surface (m ²)	Cabinet volume (L)	Gross volume (L)	Temp. regime (°C)	Ref.	Net weight (Kg.)
	Length	Depth	Height								
VBC31R/S CP	3125	1150	1290	30 + 30	5	1,74	460	4636	0°C/+6°C	R452A	240
VBC37R/S CP	3750	1150	1290	30 + 30	6	2,08	571	5563	0°C/+6°C	R452A	360

MODELS: VBC31R/S CP	VBC37R/S CP	Barcelona series – ventilated with/without storage, flat glass remote group.
----------------------------	--------------------	---

STANDARD FEATURES

➤ **Modular line**

- Different cooling system modules can be combined using complete dividers.
- Designed for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

➤ **Exterior**

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- AISI 304 stainless steel exposure surface.
- Lacquered DM decoration.
- Folding secured curved glass.

➤ **Interior**

- Plastic coated steel interior.
- Enamelled steel base.
- LED lighted middle shelf and exposure surface.
- Storage door clearance of 425x255 mm.

➤ **Insulation**

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ **Refrigeration**

- Temperature and defrost regulated by a digital controller.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

➤ **Electrical**

- Electrical connection: 230 V / 1 ph / 50 Hz.




OPTIONAL

- Sliding back doors.
- Night curtains.
- Heated glass.
- Range of decoration colours (consult).
- Electrical connection 230 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.


MODEL	Dimensions palletizing (mm)			Pallet weight (Kg.)	Power (W)	Cooling power (W at -10°C)	Consumption (kWh/24h)	Inten. (A)	Container 20' / 40' / 40' HC	Trailer
	Length	Depth	Height							
VBC31R/SCP	3275	1340	1500	380	310	2340	4,3	1,6	1 / 3 / 3	4
VBC37R/SCP	3920	1220	1525	570	370	2812	5,2	1,39	1 / 3 / 3	3

MODELS: **VBC31R/S CP** **VBC37R/S CP** *Barcelona series – ventilated with/without storage, flat glass remote group.*

GENERAL VIEW

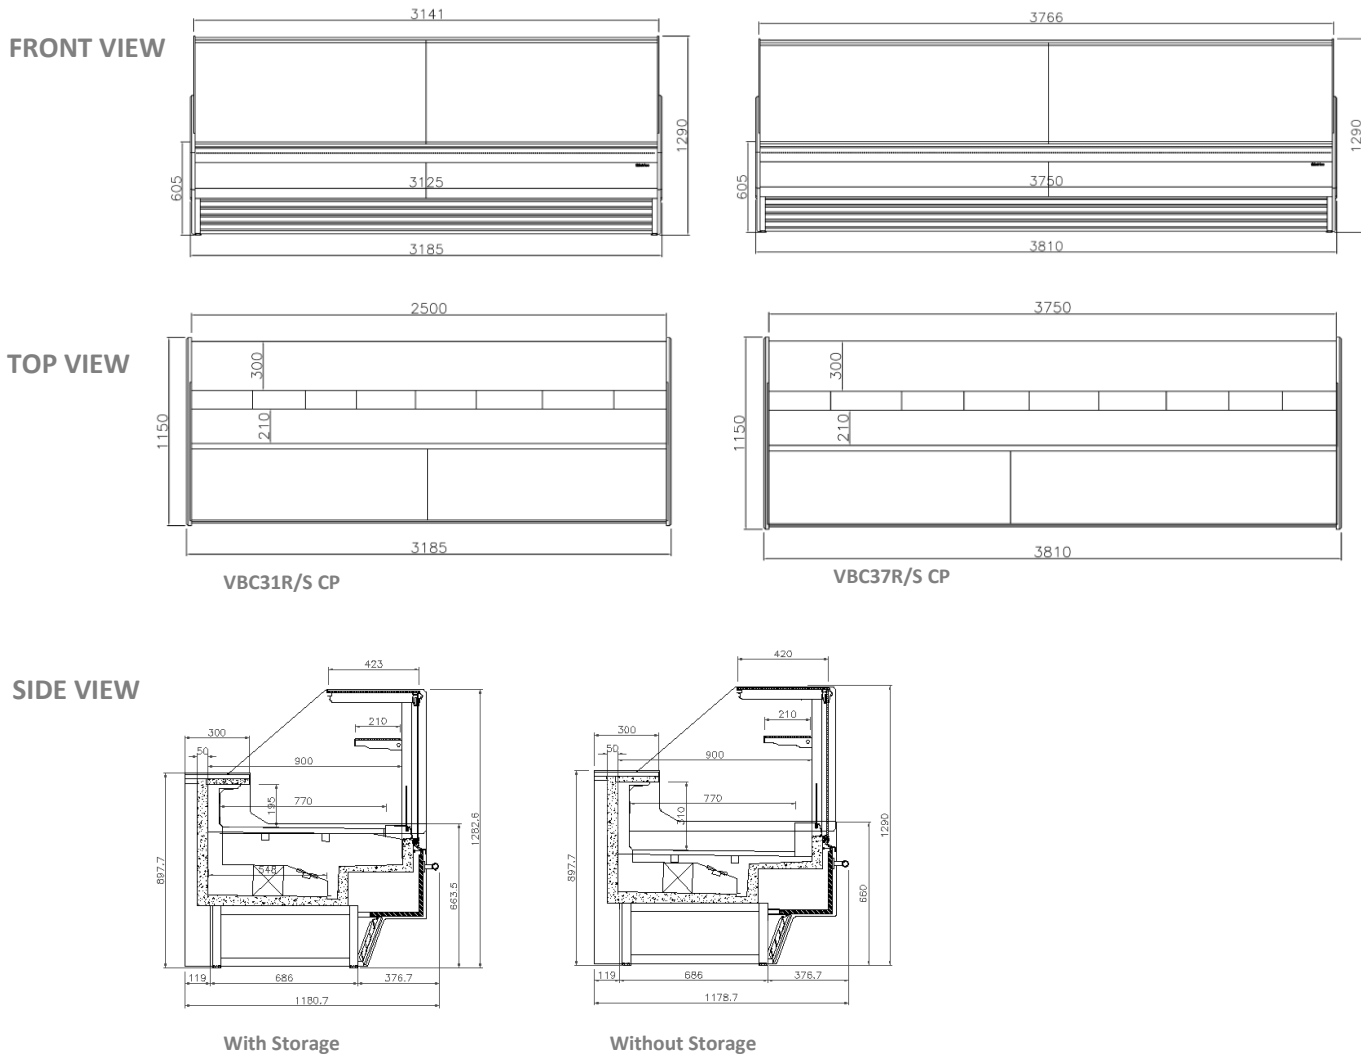

CONNECTIONS

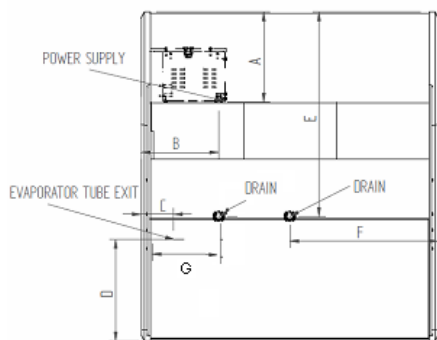

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
VBC31R	303	260	108	341	687	150	150
VBC37R	303	260	108	341	687	150	150