



Imagen correspondiente al modelo EEVC2

Fortalezas / Strengths / Forces



Uniones con aristas curvas para facilitar la limpieza. / *Rounded interior corner for easy cleaning.* / *Intérieur bords arrondis à large rayon pour un nettoyage facile.*



Mayor precisión en el control de la temperatura. / *Greater precision in temperature control.* / *Plus grande précision dans le contrôle de la température.*

Elementos Encastrables Vitrocerámica

Drop In Glass-Ceramic / Éléments Encastrés Vitrocéramique

EEVC2 – EEVC3 – EEVC4

Rev. 14/10/2026

Características generales / General characteristics / Caractéristiques générales

Rango Tª / Operating temp / Régime de Température	Max +130°C	Max+266°F
Volumen bruto / Crated volume / Volume brut l	120 / 166 / 213	32 / 44 / 56 (gal)
Medidas exteriores LxFxA / Overall dimensions LxDxH / Dimensions extérieures LxIxH	815 x 650 x 225 (mm) 1135 x 650 x 225 (mm) 1455 x 650 x 225 (mm)	32 x 26 x 9 (in) 45 x 26 x 9 (in) 57 x 26 x 9 (in)
Medidas de encastre / Recessed Measures / Mesures Encastrées	780 x 615 (mm) 1100 x 615 (mm) 1420 x 615 (mm)	31 x 24 (in) 43 x 24 (in) 56 x 24 (in)

Características constructivas / Cabinet Construction / Caractéristiques du fabricant

Material / Material / Matériau	Acero Inoxidable AISI 304 / AISI 304 Stainless Steel / Acier Inoxydable AISI 304
Vidrio / Glass / Verre	Scott
Características del interior / Interior Construction / Caractéristiques intérieures	Uniones de amplio radio / Rounded interior corner / Intérieur bords arrondis à large rayon

Datos técnicos / Technical Features / Informations techniques

Tensión/fases/frecuencia / Power Supply / Tension /phase/Fréquence	230 V / 1 ph / 50 Hz
Potencia / Power / Puissance (W)	900 / 1350 / 1800
Intensidad / Amps / Intensité (A)	3,9 / 5,9 / 7,8

Paletización / Crating / Palettisation

Medidas paletización LxFxA / Crated dimensions / Dimensions palettisation LxIxH	880 x 680 x 255 (mm) 1200 x 680 x 255 (mm) 1580 x 680 x 255 (mm)	35 x 27 x 10 (in) 47 x 27 x 10 (in) 62 x 27 x 10 (in)
Volumen bruto / Crated volume / Volume brut	120 / 166 / 213 (l)	32 / 44 / 56 (gal)
Peso neto / Net Weight / Poids net	24 / 29 / 33 (kg)	53 / 64 / 73 (lb)
Peso paletización / Crated Weight / Poids palettisation	46 / 51 / 55 (kg)	101 / 112 / 121 (lb)

Opcionales / Optional / Optionnels

- Soporte una altura / Stand a height / Supporte une hauteur
- Soporte dos alturas / Support two heights / Supporte deux hauteurs
- Pantalla Iluminación LED / LED lighting / Eclairage LED
- Pantalla Infrarrojos / Infrared Screen / Écran infrarouge
- Pantalla Infrarrojos más iluminación / Infrared Screen plus lighting / Écran infrarouge plus éclairage
- Vidrio frontal / Front glass / Vitre frontal


Elementos Encastrables Vitrocerámica

Drop In Glass-Ceramic / Éléments Encastrés Vitrocéramique


EEVC2 – EEVC3 – EEVC4

Rev. 14/10/2026


Alzado / Elevation / Vue Latéral

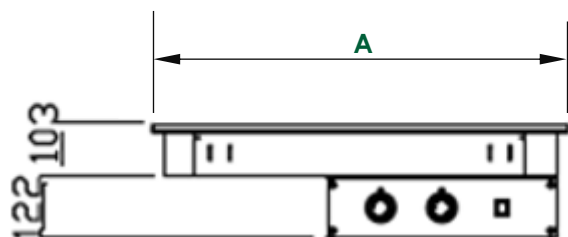

Perfil / Right View / Vue de Profil

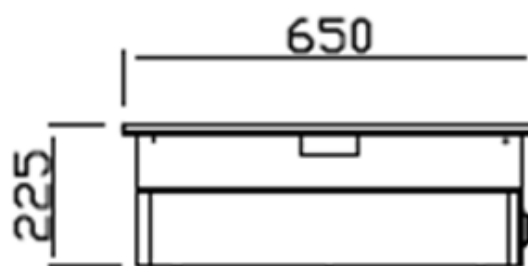

Planta / Plan View / Vue en Plan

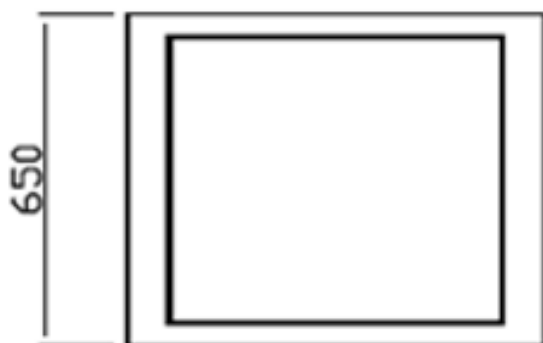

	A	B	C	D	E
EEVC2	815	-	-	-	-
EEVC3	1135	-	-	-	-
EEVC4	1455	-	-	-	-