

# 1. Reach-in Refrigerators & Freezers



## Top mounted reach -In Refrigerators

Models	Description	Page
IRR-AGB23	1 Solid Door Refrigerator - 23 ft <sup>3</sup>	18
IRR-AGB23_2	2 Solid Door Refrigerator - 23 ft <sup>3</sup>	18
IRR-AGB49	2 Solid Door Refrigerator - 49 ft <sup>3</sup>	18
IRR-AGB49_4	4 Solid Door Refrigerator - 49 ft <sup>3</sup>	18
IRR-AGB23BT	1 Solid Door Freezer - 23 ft <sup>3</sup>	18
IRR-AGB49BT	2 Solid Door Freezer - 49 ft <sup>3</sup>	18
IRR-AGB23CR	1 Glass Door Refrigerator - 23 ft <sup>3</sup>	18
IRR-AGB49CR	2 Glass Door Refrigerator - 49 ft <sup>3</sup>	18

## Roll-In & Roll-thru

Models	Description	Page
IRR-AGB45RI	1 Section Roll-In Refrigerator With 66-1/4" Cart Capacity	19
IRR-AGB96RI	2 Section Roll-In Refrigerator With 66-1/4" Cart Capacity	19
IRR-AGB45RT	1 Section Roll-Thru Refrigerator With 66-1/4" Cart Capacity	19
IRR-AGB45RIBT	1 Section Roll-In Freezer With 66-1/4" Cart Capacity	19



## Bottom mounted reach-In, Refrigerators & freezers

Models	Description	Page	Models	Description	Page
IRR-AN23	1 Solid Door Refrigerator - 23 ft <sup>3</sup>	20	IRR-AN49MX	2 Solid Door Dual Refrigerator & Freezer - 49 ft <sup>3</sup>	20
IRR-AN23_2	2 Solid Door Refrigerator - 23 ft <sup>3</sup>	20	IRR-AN23CR	1 Glass Door Refrigerator - 23 ft <sup>3</sup>	20
IRR-AN49	2 Solid Door Refrigerator - 49 ft <sup>3</sup>	20	IRR-AN49CR	2 Glass Door Refrigerator 49 ft <sup>3</sup>	20
IRR-AN49_4	4 Solid Door Refrigerator - 49 ft <sup>3</sup>	20	IRR-AN67CR	3 Glass Door Refrigerator -67 ft <sup>3</sup>	20
IRR-AN67	3 Solid Door Refrigerator - 67ft <sup>3</sup>	20	IRR-AN23BT	1 Glass Door Freezer - 23 ft <sup>3</sup>	20
IRR-AN67_6	6 Solid Door Refrigerator - 67ft <sup>3</sup>	20	IRR-AN49BT	2 Glass Door Freezer 49 ft <sup>3</sup>	20
IRR-AN23BT	1 Solid Door Freezer - 23 ft <sup>3</sup>	20			
IRR-AN49BT	2 Solid Door Cr - 49 ft <sup>3</sup>	20			
IRR-AN67BT	3 Solid Door Freezer - 67 ft <sup>3</sup>	20			



## Top mounted Slim Line reach-In, Refrigerators & freezers

Models	Description	Page	Models	Description	Page
IRR-AGN300CR	1 Glass Door Refrigerator	22	IRR-AGN602	2 Solid Door Refrigerator	22
IRR-AGN301	1 Solid Door Refrigerator	22	IRR-AGN603	3 Solid Door Refrigerator	22
IRR-AGN302	2 Solid Door Refrigerator	22	IRR-AGN604	4 Solid Door Refrigerator	22
IRR-AGN301BT	1 Solid Door Freezer	22	IRR-AGN602BT	2 Solid Door Freezer	22
IRR-AGN600CR	2 Glass Door Refrigerator	22	IRR-AGN602MX	2 Solid Door Dual Refrig. & Freezer	22




# Specifications



Triple chamber snap in door gasket for easy cleaning



Reinforced shelves



Compact monoblock system [AGB models]



**AGB23**



**AN23\_2**



**AN49 CR**

## Exterior

- AISI 304 stainless steel

## Interior

- AISI 430 stainless steel
- Sealed interior floors and rounded cabinet corners
- Led lighting
- Internal drain plug for easy cleaning.

## Shelving

- Three plastic coated wire shelves per door with stainless steel tray slides included.
- Tray slides are compatible with 18"x26" and 12"x20" sheet pans,
- Plastic coated tray divider [except IRR-AGB23, IRR-AGB23-2 and IRR-AN23].

## Doors

- Polyurethane insulated doors,
- Self closing doors with stay open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible doors,
- Doors locks,
- Full-height door opening [22-7/8" x 58-5/8"].



Interior features of IRR-AGB23BT



Expansion valve AGB models and AN model freezers



**AN67**



**AGB45 RI**

**Refrigeration**

- Forced air refrigeration system, expansive valve
- Digital temperature controller with automatic defrost system
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anticorrosion material 100% Polyester -100 °F ambient
- Electronic fans
- Hot gas defrost for low temp units

**Roll-in & roll-thru**

**Exterior**

- Insulated bottom side with 0,8" [1 inch] thick with ramp included
- Built with removable panel for easy installation

**Interior**

- AISI 304 stainless steel
- Panel thickness 3-3/16"


**Refrigeration**

- Compact refrigeration system monoblock, INFRIBLOCK ®

# AGB Series

## Top mounted Reach-in Refrigerators & Freezers

### AGB Series

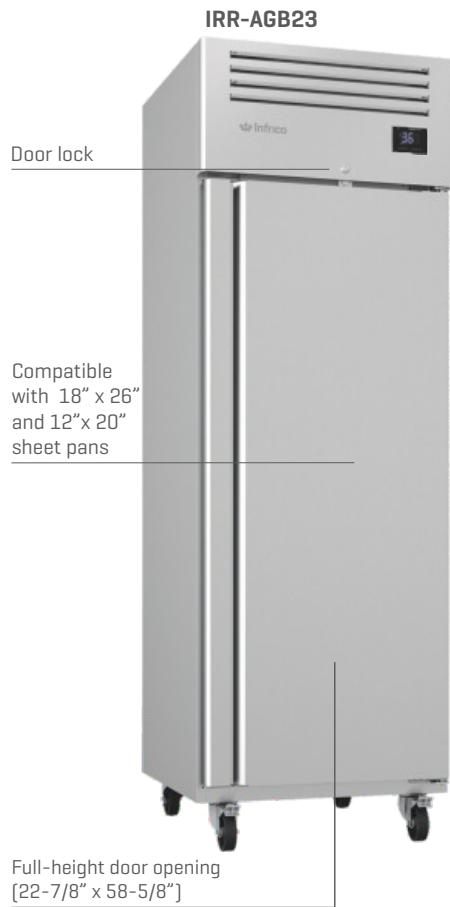

Compact monoblock system



Expansion valve



RGB LED lighting (option)



MOD.	Overall Dimensions			Doors	Shelves	[°F]	[ft <sup>3</sup> ]	[HP]	115V	[Lbs]	DOE
IRR-AGB23	27	31-1/4	84	1	3	33°F/38°F	23.0	1/4	3.8	380	Hydrocarbon R-290
IRR-AGB23_2	27	31-1/4	84	2	3	33°F/38°F	23.0	1/4	3.8	380	Hydrocarbon R-290
IRR-AGB49	54-1/2	31-1/4	84	2	6	33°F/38°F	49.0	1/3	4.0	700	Hydrocarbon R-290
IRR-AGB49_4	54-1/2	31-1/4	84	4	6	33°F/38°F	49.0	1/3	4.0	700	Hydrocarbon R-290
IRR-AGB23BT	27	31-1/4	84	1	3	-5°F/0°F	23.0	3/4	7.2	375	Hydrocarbon R-290
IRR-AGB49BT	54-1/2	31-1/4	84	2	6	-5°F/0°F	49.0	1 -1/4	10.5	620	Hydrocarbon R-290
IRR-AGB23CR	27	31-1/4	84	1	4	33°F/38°F	23.0	1/3	5.0	380	Hydrocarbon R-290
IRR-AGB49CR	54-1/2	31-1/4	84	2	8	33°F/38°F	49.0	1/3	5.2	620	Hydrocarbon R-290

Height already includes 5-1/8" for casters

#### STANDARD FEATURES

<b>ELECTRICAL</b>	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz Expansion valve (all) and hot gas defrost system (BT)	Cord and NEMA 5-15P plug, (AGB 23BT)
<b>DOE DOORS</b>	BT Models: Heated door frame to avoid accumulation of ice	Door built-in Thermopane double glass [CR models]
<b>AMBIENT</b>	Temp 100°F	
<b>OPTIONS</b> Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

# Roll-in & Roll Thru Refrigerators & Freezers

# RI Series



Rack not included

MOD.	Overall Dimensions			Doors	Temp [°F]	Volume [ft³]	Power [HP]	115V [Amps]	Weight [Lbs]	DOE
IRR-AGB45RI	37-1/4	41-3/4	93	1	33°F/38°F	45.24	1/2	6	510	Hydrocarbon R-290
IRR-AGB96RI	71-5/8	41-3/4	93	2	33°F/38°F	96.3	5/8	12.3	970	Hydrocarbon R-290
IRR-AGB45RT	37-1/4	41-3/4	93	2	33°F/38°F	45.24	1/2	6	510	Hydrocarbon R-290
IRR-AGB45RIBT	37-1/4	41-3/4	93	1	-5°F/0°F	45.24	5/8	14	510	Hydrocarbon R-290

Height already includes 5-1/8" for casters

### STANDARD FEATURES

<b>ELECTRICAL</b>	For Refrigerators: Cord and NEMA 5-15P plug For Freezers: Cord and NEMA 5-20P plug. / Cord and NEMA L14-30P plug. (AGB 96RIBT) Electrical connection is 115V / 1ph / 60Hz
<b>MAX RACK SIZE</b>	→ 27-1/4      ↗ 36-1/4      ↑ 71-1/2
<b>EXTERIOR</b>	AISI 304 stainless steel Built with removable panels for easy installation Insulated lower side with 0,8" [1 inch] thick with ramp included Insulated floor with 2,5" [2 inch] thick with ramp included