


MODELS: **VEU90AAR/S** **VEU90ACR/S**
VEU45AAR/S **VEU45ACR/S**

Europa series – Angles – Refrigerated modular curved glass display case.

Strengths

- ✓ *Combination of different cooling system modules: ventilated, half-static and static. Modules with or without cooled storage. Angles and counters to adapt the line to a space.*
- ✓ *Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All condenser units are tested 100%, in helium chambers to refrigerant leak detections.*
- ✓ *LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*

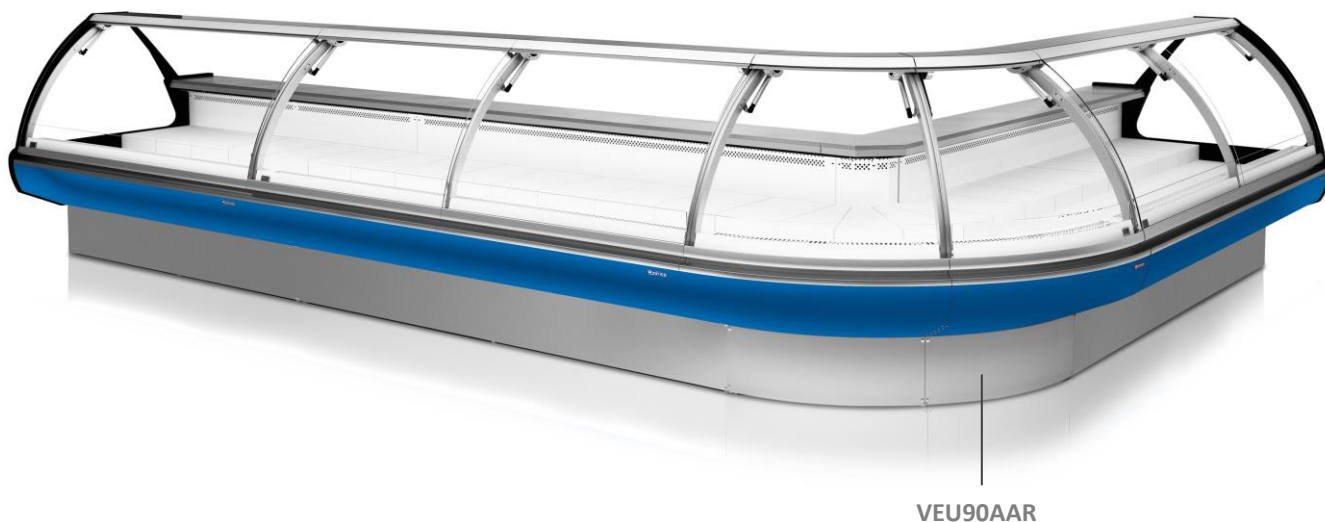

MODELS	Dimensions (mm)			Sides thickness (mm)	Exposure surface (m ²)	Gross volume (L)	Temp. regime (°C)	Ref.	Net weight (Kg.)
	Length	Depth	Height						
VEU90AA	1326	1285	1310	40 + 40	1,10	2232	0°C/+6°C	R452	225
VEU45AA	1108	1285	1310	40 + 40	0,60	1865	0°C/+6°C	R452	171
VEU90AC	1887	1285	1310	40 + 40	1,85	3177	0°C/+6°C	R452	201
VEU45AC	1470	1285	1310	40 + 40	0,92	2475	0°C/+6°C	R452	179

MODELS: **VEU90AAR/S** **VEU90ACR/S**
VEU45AAR/S **VEU45ACR/S**

Europa series – Angles – Refrigerated modular curved glass display case.

STANDARD FEATURES

➤ Modular lines

- Designed for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

➤ Exterior

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- Galvanised steel exposure surface.
- Lacquered DM decoration.
- Folding secured curved glass.

➤ Interior

- Plastic coated steel interior.
- Enamelled steel base.
- LED lighted shelf and exposure surface.
- Storage door clearance of 425x255 mm.

➤ Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ Refrigeration

- Temperature and defrost regulated by a digital controller.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.



OPTIONAL

- ☐ Stainless steel exposure surface.
- ☐ Night curtains.
- ☐ Heated glass.

- ☐ Double plane (without storage).
- ☐ Range of decoration colours (consult).
- ☐ Electrical connection 230 V / 1 ph / 60 Hz.
- ☐ Electrical connection 115 V / 1 ph / 60 Hz.


MODELS	Dimensions palletizing (mm)			Pallet weight (Kg.)	Power (W)	Comp. (HP)	Cooling power (W at -10°C)	Consumption (kWh/24h)	Container 20'/40'/40'HC	Trailer
	Length	Depth	Height							
VEU90AA	2660	1330	1500	240	1025	5/8	1096	14,4	2 / 4 / 4	5
VEU45AA	1200	1330	1500	201	700	-	-	0,5	4 / 9 / 9	20
VEU90AC	1955	1330	1500	234	1110	3/4	1315	15,5	4 / 8 / 8	10
VEU45AC	1570	1330	1500	201	780	1/2	817	10,9	4 / 8 / 8	10

MODELS: **VEU90AAR/S** **VEU90ACR/S**
VEU45AAR/S **VEU45ACR/S**


Europa series – Angles – Refrigerated modular curved glass display case.

GENERAL VIEW

FRONT VIEW


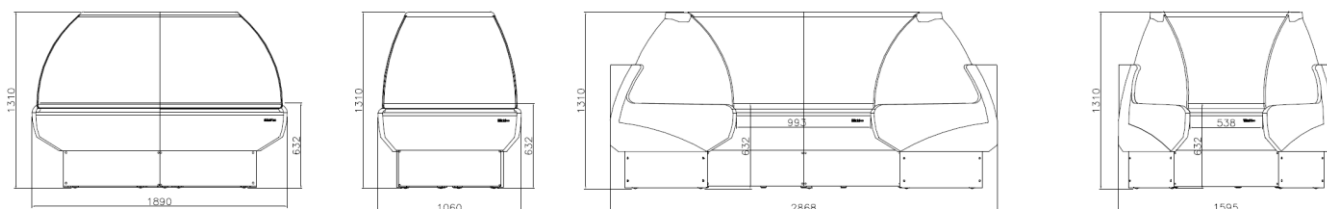


TOP VIEW

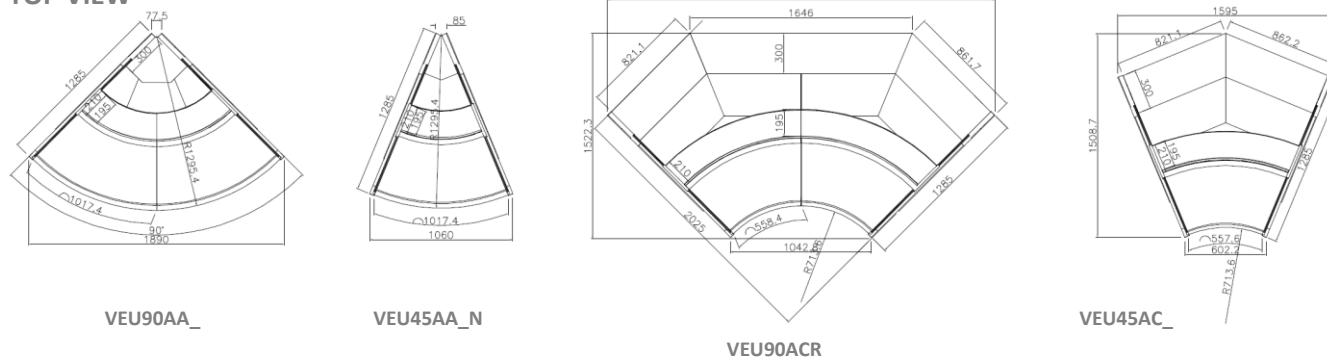


SIDE VIEW

CONNECTIONS

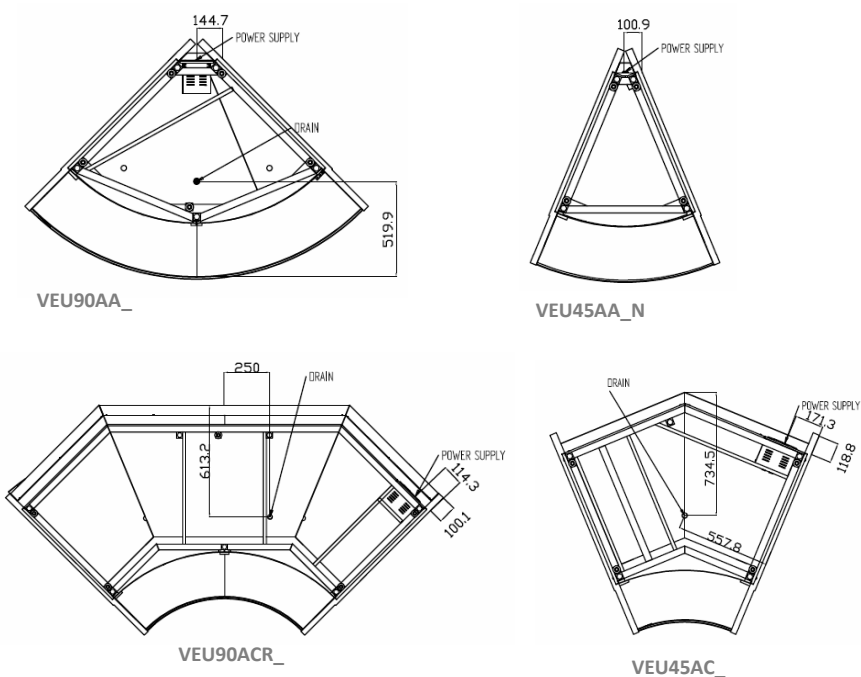

Without storage



With storage